



City Research Online

City, University of London Institutional Repository

Citation: Mamouei, M. H., Kaparias, I. & Halikias, G. (2016). A quantitative approach to behavioural analysis of drivers in highways using particle filtering. *Transportation Planning and Technology*, 39(1), pp. 78-96. doi: 10.1080/03081060.2015.1108084

This is the accepted version of the paper.

This version of the publication may differ from the final published version.

Permanent repository link: <https://openaccess.city.ac.uk/id/eprint/13114/>

Link to published version: <https://doi.org/10.1080/03081060.2015.1108084>

Copyright: City Research Online aims to make research outputs of City, University of London available to a wider audience. Copyright and Moral Rights remain with the author(s) and/or copyright holders. URLs from City Research Online may be freely distributed and linked to.

Reuse: Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

City Research Online:

<http://openaccess.city.ac.uk/>

publications@city.ac.uk

A quantitative approach to the behavioural analysis of drivers in highways using particle filtering

Mohammad Mamouei¹

*School of Mathematics, Computer Science and Engineering, City University London,
London, United Kingdom*

Ioannis Kaparias

*School of Mathematics, Computer Science and Engineering, City University London,
London, United Kingdom*

George Halikias

*School of Mathematics, Computer Science and Engineering, City University London,
London, United Kingdom*

¹ Corresponding author: Mohammad Mamouei

Email: mohammad.mamouei.1@city.ac.uk

A quantitative approach to behavioural analysis of drivers in highways using particle filtering

The analysis of driving behaviour is a challenging task in the transport field that has numerous applications, ranging from highway design to micro-simulation and the development of advanced driver assistance systems (ADAS). There has been evidence suggesting changes in the driving behaviour in response to changes in traffic conditions, and this is known as adaptive driving behaviour. Identifying these changes and the conditions under which they happen, and describing them in a systematic way, contributes greatly to the accuracy of micro-simulation, and more importantly to the understanding of the traffic flow, and therefore paves the way for introducing further improvements with respect to the efficiency of the transport network. In this paper adaptive driving behaviour is linked to changes in the parameters of a given car-following model. These changes are tracked using a dynamic system identification method, called particle filtering. Subsequently, the dynamic parameter estimates are further processed to identify critical points where significant changes in the system take place.

Keywords: adaptive driving behaviour; particle filtering; car-following models; dynamic system identification, calibration

Acknowledgement:

The research reported has been supported by City University London's Doctoral Studentships scheme. The authors would also like to thank the anonymous reviewers for their constructive comments.

1. Introduction

Studying the body of literature on micro-simulation points to the difficulty of representing the dynamics of driving under different traffic conditions and for different drivers by a single mathematical equation. There have been studies reporting that the behaviour of different drivers is best represented using different model structures (Punzo and Simonelli 2007, Ossen and Hoogendoorn 2007), which in essence means

that different drivers drive according to different models. Furthermore, individual drivers also exhibit different driving patterns in different traffic conditions, a phenomenon that has been identified by many researchers (Munoz and Daganzo 2002, Ma and Andréasson 2007, Hoogendoorn, et al. 2006). The very fact that the calibration of car-following models is highly dependent on the driving condition, as confirmed by numerous studies (such as Punzo and Simonelli (2007), Ossen and Hoogendoorn (2008) and Kesting and Treiber (2009)) is further testimony of the existence of this phenomenon.

Much research has partly addressed the issue of adaptive driving behaviour by developing multi-regime car-following models, which are able to achieve greater accuracy in the reproduction of the driving behaviour. Notable examples include the models proposed by Wiedemann (1974), Yang and Koutsopoulos (1996) and Fritzsche (1994), implemented in the VISSIM, MITSIM, and Paramics micro-simulation software tools, respectively. However, while the passive reproduction of driving behaviour is a significant improvement, important questions that remain open are whether it is possible to actively identify the conditions under which changes in driving behaviour happen, and in what way these conditions may be affecting the driving behaviour. As a matter of fact, being able to identify and represent the drivers' adaptive behaviour in micro-simulation would bring about even greater improvements in terms of modelling accuracy and would deliver a better insight into the traffic flow.

Some previous research in the direction of identifying and modelling adaptive driving behaviour exists. Notably, Ma and Andréasson (2007) used data collected from an instrumented vehicle to identify different regimes of driving and applied a fuzzy clustering method to a combination of accelerations and velocities of lead and follower vehicles, as well as to their spacing, in order to group the data into different regimes.

Thiemann, Treiber and Kesting (2008) calculated probability density functions for headways from a large dataset of vehicle trajectories and identified a significant correlation between the headway and driving-behaviour-related variables, such as speed, approach speed and traffic condition. Treiber, Kesting and Helbing (2006) proposed a general adaptation method that can be integrated within a wide range of car-following models, which essentially states that the headway in smooth traffic flow increases linearly with variations in the local traffic conditions; a measure for representing these variations was then given, and the model was calibrated empirically using data from a Dutch highway. And Hoogendoorn et al. (2006) used a method called particle filtering to calibrate two car-following models dynamically (the Gazis-Herman-Rothery (GHR) and the Helly models), which allowed the model parameters to vary at each time instance in order to minimise the estimate error, as opposed to static system identification methods requiring the whole set of time series data to be used to find the single set of parameters resulting in least error.

Building on the work of Hoogendoorn et al. (2006), the aim of this study is to investigate the possibility of utilising particle filtering for purposes beyond the simple demonstration of variations in model parameters. Specifically, the main objective is to analyse whether a link between changes in the model parameters and external stimuli or driving conditions can be established. Deriving a conclusion in this regard will deliver two significant benefits: on one hand, such information will help gain a better insight into traffic dynamics and dynamic driving behaviour, with corresponding improvements in micro-simulation modelling; on the other hand, it will enable the assessment of the capabilities of car-following models on the basis of the robustness of their parameter estimates and of their ability in accounting for different driving phenomena. For instance, if a car-following model fails to account for a certain driving phenomenon,

this deficiency will exhibit itself in the form of systematic changes in the model parameter estimates, when the phenomenon becomes present.

The rest of this paper is organised as follows: the background of the study, including an overview of previous relevant work on the topics of car-following models, calibration methods and particle filtering is given in Section 2. Section 3 presents the application of particle filtering to a simulated dataset and proposes a simple method for the discretisation of the dynamic parameter estimates, so as to facilitate the identification and analysis of dynamic driving behaviour. Section 4 then applies the proposed method on a vehicle trajectory dataset from a real highway and discusses the results. Finally, Section 5 summarises the conclusions and identifies areas of future work.

2. Background

Car-following models, and acceleration models in general, describe the behaviour of human drivers. These models, integrated in simulation software, are used to assess policy-making in various fields related to transport networks, ranging from highway design to the evaluation of advanced driver assistance systems (ADAS). However, not all of these models are developed for the same purpose, and different levels of accuracy might be required accordingly, and so different car-following models may best serve different purposes. A large number of car-following models have been developed over several decades, and comprehensive reviews of the topic are given by Brackstone and McDonald (1999) and by Ahmed (1999).

System identification is an important aspect for car-following models, as such models may describe the structure of the stimuli-response processes underlying the car-following behaviour in a mathematical form, but they need to be adjusted and tailored if they are to be applied in a specific scenario. This may be done through calibration using

an appropriate dataset. In this section, the Intelligent Driving Model (IDM) car-following model, used in this work, is presented, followed by a discussion of some of the considerations related to calibration that need to be made, and by a brief description of the particle filtering method.

2.1 The IDM car-following model

The IDM car-following model is selected for the present study on the basis of a number of advantages that it presents over other models. Namely, in addition to being computationally simple and relying only on a small number of parameters, each with an intuitive meaning, the IDM has also been found to perform well in terms of both macroscopic and microscopic calibration (Treiber, Hennecke and Helbing 2000, Treiber and Kesting 2013, Punzo and Simonelli 2007). Numerous studies on different aspects of the IDM have been carried out, including calibration, stability and other microscopic and macroscopic properties, and the advantages have been confirmed (Wilson and Ward 2011, Kesting and Treiber 2009).

The IDM is given by the following general equation:

$$\dot{v} = a \left[1 - \left(\frac{v}{v^d} \right)^\delta - \left(\frac{s^*(v, \Delta v)}{s} \right)^2 \right] \quad (1)$$

$$s^*(v, \Delta v) = s_0 + s_1 \sqrt{\frac{v}{v^d}} + T v + \frac{v \Delta v}{2\sqrt{ab}}$$

$$\Delta v = v - v_p$$

which calculates the value of the output variable \dot{v} , denoting the acceleration of the subject vehicle, as a function of the following input variables: the speed of the subject vehicle v ; the speed of the preceding vehicle v_p ; and the distance headway s . The model is then also dependent on a number of parameters, including: the maximum

acceleration a ; the desired speed v^d ; the acceleration exponent δ ; the jam distances in fully-stopped and in high-density traffic s_0 and s_1 respectively; the safe time headway T ; and the comfortable deceleration b .

2.2 Calibration of car-following model

Many factors must be taken into account in the calibration of a car-following model, including the choice of the dataset, the calibration method employed and the purpose for which the calibrated model is to be used. When a certain level of accuracy in the collective behaviour or traffic flow is required to reproduce the same flow-density characteristics as observed in the real data, a certain set of model parameters for a given car-following model may work best (Treiber, Hennecke and Helbing 2000). However, for the different purpose of modelling microscopic behaviour of individual drivers, including details such as the velocity and spacing of individual vehicles, another set of model parameters may work best, which would be different from the former (Treiber and Kesting 2013). Even for the same driver, significant inconsistencies between the calibration results with different trajectory data can be found. This means that if one intends to reproduce accurate trajectories for a given driver in a specific driving condition on a specific highway (e.g. upstream of a bottleneck, taking into account the traffic flow and density, weather conditions, etc.), the data used for the calibration must match the specific scenario under investigation in terms of traffic characteristics.

Even excluding the question of intra-driver inconsistencies, this gives rise to the so called phenomenon of over-fitting, which means that the model is so accurately adapted to a given specific scenario that it loses its generality, delivering inaccurate results even for very slight variations in the driving scenario. Over-fitting means that the resulting model is rendered unreliable for making any predictions, which makes the trade-off between accuracy and robust calibration evident. Other considerations

regarding calibration include the choice of error measurement (e.g. travel time, spacing, velocity, acceleration), system identification method (e.g. Maximum-Likelihood Estimation (MLE), Least Squares Estimation (LSE), nonlinear optimisation methods), and error tests (e.g., Root Mean Square error (RMSe), Root Mean Square Percentage error (RMSQe), and Theil's inequality coefficient (U)). Comprehensive reviews of some of these considerations have been carried out by Punzo and Simonelli (2007), Ossen and Hoogendoorn (2008), Treiber and Kesting (2013), and Ranjitkar, Nakatsuji and Asano (2004).

2.3 Particle filtering

Sequential Monte-Carlo filtering or particle filtering (PF) can be used to tackle the difficulty associated with the estimation of states or parameters in nonlinear, non-Gaussian filtering. The state-space representation of such a system is denoted below:

$$x_t = f(x_{t-1}, v_{t-1}), \quad y_t = h(u_t, x_t, n_t) \quad (2)$$

where x_t is the state of the system that evolves under the nonlinear function $f(\cdot)$. The previous state of the system is denoted by x_{t-1} , and v_{t-1} is an independent and identically distributed (i.i.d) random noise, that is known as the process noise. The true state of the system is almost always hidden from the observer, however one can deduce a good estimate of it through successive observations and measurements $\{y_t, t \in \mathbb{N}\}$. This, in fact, is the ultimate purpose of filtering. These observations are dependant on the control input u_t , the true state of the system x_t , and an i.i.d noise n_t , known as the measurement noise. This dependency is denoted by the function $h(\cdot)$.

The method of PF is based on the principles of Bayes theorem, which provides a mechanism for updating knowledge about the underlying system upon receipt of new

data on the observed states of the system at each time instance. In Bayesian estimation, the quantity of interest is the probability distribution function of the state variable given the sequence of observations made $p(x_t | y_{0:t})$, which is known as the posterior distribution.

In algorithms such as the Kalman Filter and the Extended Kalman Filter, the following two assumptions are made: the system is linear, or a locally linearised system provides a good enough approximation (in the case of EKF); and the underlying noise is Gaussian. Under these assumptions the characteristics of the posterior, namely the mean and covariance, can be optimally derived. The term optimal in this context means that the resulting estimator leads to Minimum Mean-Square Error (MMSE). However, when the system of interest exhibits highly nonlinear behaviour and the noise is non-Gaussian, the performance of KF and EKF deteriorates.

PFs provide an alternative way to linearisation and holding assumptions about the underlying noise distribution. In these methods a number of samples, that are referred to as particles, are propagated through the nonlinear system using simulation techniques, and then these samples are used to extract the characteristics of the posterior. An important step in this method is importance sampling, where an estimate of the ratio below is calculated:

$$w_t = \frac{p(y_{1:t} | x_{0:t}) p(x_{0:t})}{q(x_{0:t} | y_{1:t})} \quad (3)$$

where w_t is the importance weight, $p(y_{1:t} | x_{0:t})$ is the conditional probability of the observations y given the states x ; $p(x_{0:t})$ is the probability distribution of states; and $q(x_{0:t} | y_{1:t})$ is a known, easy-to-sample proposal distribution.

A sequential relationship for the importance weight can be drawn, as shown by van der Merwe, et al. (2000), namely:

$$w_t = w_{t-1} \frac{p(y_t|x_t)p(x_t|x_{t-1})}{q(x_t|x_{0:t-1}, y_{1:t})} \quad (4)$$

which gives rise to the popular choice of the proposal distribution

$$q(x_t|x_{0:t-1}, y_{1:t}) = p(x_t|x_{t-1}) \quad (5)$$

which results in the simplification of equation (4).

In PF the estimate of the posterior is based on a number of randomly selected weighted samples. The great potential of this method in dealing with complex nonlinear non-Gaussian systems has been pointed out by van der Merwe et al. . (2000) and by Arulampalam et al. (2002), and a schematic representation is given in Figure 1. At the first step of the algorithm (sampling) N random particles (samples) are drawn from a proposal distribution. These particles are then propagated through the nonlinear system and are subsequently associated with weights \tilde{W} according to their fitness, i.e. equation (4). This step is known as importance sampling. Subsequently, a resampling of particles with respect to their associated weights is carried out, as a result of which particles with high weights are split into a number of unweighted particles and particles with low weights are eliminated. Finally, the introduction of a random noise to the group of particles at the third step results in local variety in the samples. This process is visualised in the fourth row of particles in Figure 1. Since, this step provides an unweighted distribution of particles that mimic the prior distribution, it is referred to as the prediction step.

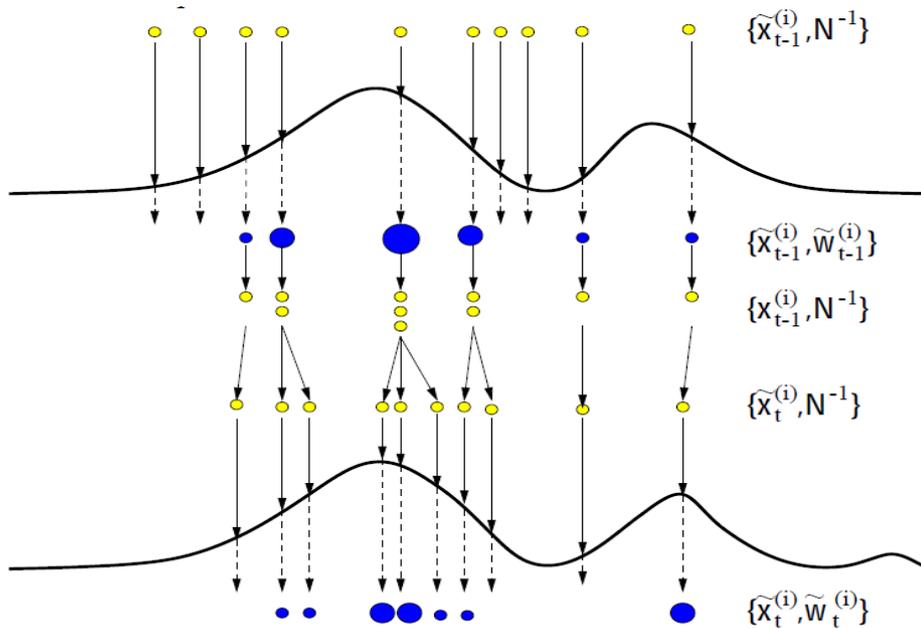


Figure 1. Illustration of the three stages of importance sampling, resampling, and prediction in PF, figure from van der Merwe et al. (2000)

In the present study, the application of PF for parameter tracking is of particular interest. Given a car-following model and a set of data, one can update the estimates of model parameters upon the receipt of new data. As a result, one will obtain time-varying estimates of the model parameters. Naturally, these time-varying estimates cannot be used for modelling and simulation purposes, but they can provide a good insight into some of the very important model characteristics that may otherwise remain hidden in cumulative error terms. In particular, in simulation-based applications the parameters are constant, and hence the use of a parameter tracking method gives information about how a model parameter should deviate from its nominal value to compensate for modelling flaws. This concept is closely related to model-based fault detection (Isermann 1984, Venkatasubramaniana, et al. 2003). There is a possibility that in some cases general patterns in changes of the model parameters are observed (e.g. significant increase or decrease in the value of a model parameter in an identifiable

driving phase), and this type of information can then be used to improve the quality of modelling and simulation.

3. Methodology

In this section PF is applied to simulated data to investigate the extent to which the properties of the adaptive driving can be identified using this method. The section first introduces the simulated dataset, and then goes on to present the results of the application. The choice of the objective function for the calibration is also described, and a simple method for the discretisation of the estimates is proposed. The discretisation of the dynamic estimates is an important step in the interpretation of the raw estimates obtained initially and in the linkage of the changes in the model parameters to the traffic conditions.

3.1 Simulated dataset

In this section the application of particle filtering to simulated data is investigated to illustrate the extent to which this method can be utilised for the purpose of “meaningful” parameter tracking in car-following models. The additional constraint arising from the term “meaningful” refers to the fact that, sometimes by calibrating a number of model parameters simultaneously, an error in the estimate of one model parameter may be compensated by an error in another. This could happen due to the existence of correlation between model parameters and the fact that the information available is less than what is required for the determination of the unknowns uniquely, thus causing erroneous tracking of model parameters.

For the data simulation, the trajectories of a specific vehicle from the enhanced NGSIM I-80 dataset (Montanino and Punzo 2013) were selected. The NGSIM I-80 dataset is an open source trajectory data that has been collected from a 500-m long

stretch of an interstate freeway in the San Francisco Bay area, CA (Halkias and Colyar 2006), and the enhanced dataset has been made available by the MULTITUDE project (Montanino and Punzo 2013). The selected trajectories were then used to generate trajectories for follower vehicles with the IDM model proposed by Treiber, Hennecke and Helbing (2000), and a specific parameter profile was used for this purpose. In the profile used, certain parameters were varied at certain points in time, and particle filtering was applied to the simulated trajectories to generate dynamic estimates of the model parameters. Figure 2 illustrates the trajectories used for the leader vehicle.

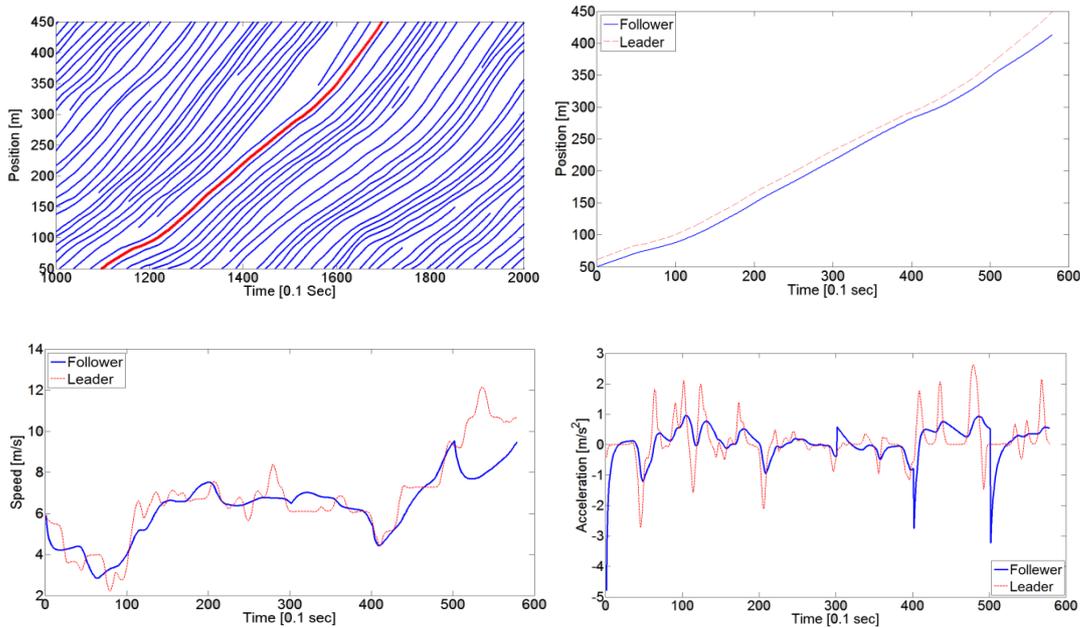


Figure 2. a) Trajectory of the lead vehicle selected from NGSIM data Lane 2 b,c,d) Position trajectories, velocities, and accelerations of the lead vehicle and synthesized follower in dashed red line and blue line respectively

The parameter profiles used for the simulation of the trajectories shown were as follows: the default model parameters reported by Treiber, Hennecke and Helbing (2000) were used up to Time = 30 s , i.e. $a = 0.73 \frac{m}{s^2}$, $b = 1.67 \frac{m}{s^2}$, $v_d = 33.3 \frac{m}{s}$, $\delta = 4$, $s_0 = 2 m$, $s_1 = 0 m$, and $T = 1.6 s$; then, at $t = 30 s$, the following parameters were

changed to the given values: $b_0 = 1.5 \frac{m}{s^2}$, $a_0 = 1 \frac{m}{s^2}$, $v_d = 60 \frac{m}{s}$, $T = 0.5 s$. As such, the simulation includes the case of having erroneous estimates for some of the model parameters while another one is being tracked. Additionally, the value of the parameter T changes again to the values $T = 1 s$ and $T = 3 s$ at time points $t = 40 s$ and $t = 50 s$, respectively.

3.2 Sensitivity analysis

One important consideration in the model calibration is addressing the question of how the dataset used reflects the characteristics of the model parameters. This is especially of importance in models, such as IDM, where some degree of orthogonality between model parameters exists, and different model parameters are best set according to different types of data in different regimes of driving (Treiber and Kesting 2013). If this question is not addressed, misleading estimates of model parameters or unnecessary high computational complexity may result (Ciuffo, Punzo and Mon 2014).

Global sensitivity analysis is used for this purpose, and the more representative “total sensitivity indices” are used, that capture the impact of parameters across all the feasible regions in the hyperspace of parameter values (Ciuffo, Punzo and Mon 2014, Saltelli, et al. 2010, Jacques, Lavergne and Devictor 2006). Figure 3 illustrates the results for total sensitivity as a function of the number of samples used for the same trajectory as above. As expected, the results for other vehicles were also found to be consistent with the ones illustrated, as well as those reported by Ciuffo, Punzo and Mon (2014). The parameter related to headway, T , has the highest impact with a total sensitivity index value of 0.788, and the parameter related to spacing in jam traffic, s_0 , has the second highest impact, with a total sensitivity index value of 0.268. The rest of the indices have values very close to zero and can be seen as a horizontal line roughly

coinciding with the x-axis. The upper boundary (UB) and lower boundary (LB) values for parameters are given in Table 1.

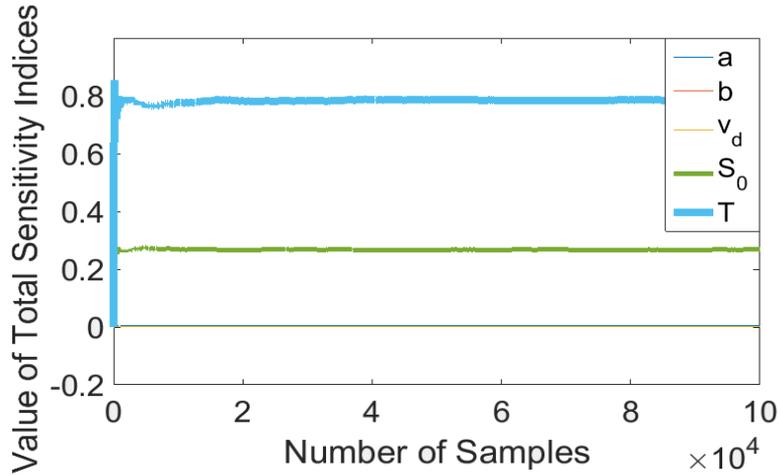


Figure 3. Total sensitivity indices for the simulation scenario

Table 1 Lower and upper boundary

Parameters	LB	UB
a	1	3
b	1	3
V_d	20	50
s_0	2	10
T	0.5	3

As pointed out by Ciuffo, Punzo and Mon (2014), since the assumption of parameter independence for such models is unlikely to hold, the results may be subject to bias. Nonetheless, the conclusions were also verified through a local sensitivity analysis around the calibrated parameter values, as well as through investigation of the use of different parameter values and different combinations thereof for parameter

tracking. Furthermore, an additional justification to the choice of the parameter used in this study is the physical meaning of it.

3.3 Application of particle filtering to simulated data

Figure 4 shows the results of the application of particle filtering to the simulated dataset. For this purpose, all of the model parameters are set to their default values, except for parameter T, which is to be estimated dynamically.

As was seen, a reason for focusing on T in parameter tracking is that it was found that no other parameter was capable of tracking the changes in driving behaviour for multiple trajectories when selected alone. Also, variations in this model parameter remain low compared to other model parameters. Furthermore, one of the advantages of IDM is that the parameters have intuitive meanings, and if one parameter is to be selected among others representing comfortable deceleration, maximum acceleration, desired velocity, etc., the choice of parameter T, representing headway, is most sensible. This parameter was also used in Treiber, Hennecke and Helbing (2000) to generate variations in traffic conditions, and hence driving behaviour, and by doing so the empirical data related to the formation of traffic jams were successfully simulated.

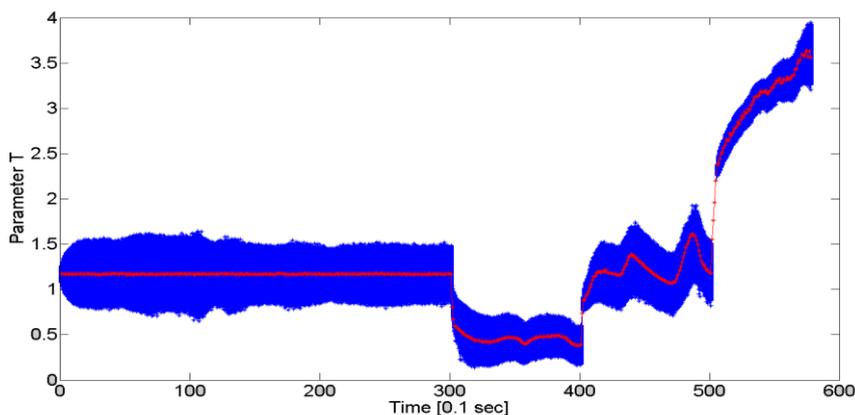


Figure 4. The result for estimation of the parameter T. The blue shadow denotes the distribution of particles at each time instance while the red curve is the selected particle.

It can be seen that up to time $t = 30$ s, the estimation of parameter T is almost error-free and stable. Also, the subsequent changes at the times $t = 30$ s, $t = 40$ s, and $t = 50$ s can be identified from Figure 4 by “jumps” in the values of the parameter at these times, compared to the smooth curves in the intervals between the changes. The estimations of parameter T at times after $t = 30$ s, unlike before, are unstable and fluctuate around a certain value. This is due to the fact that beyond time $t = 30$ s, other model parameters were changed to values other than the ones used in the estimation process. As a result, the effect of this false estimation needs to be compensated by overestimations and underestimations of parameter T.

Using the parameter estimation given by the application of particle filtering (Figure 4), an almost perfect estimation of the spacing ($R^2 = 0.995$), velocity ($R^2 = 0.993$) and acceleration ($R^2 = 0.91$) can be derived, despite the errors in the other model parameters from $t = 30$ s onwards). This is shown in Figure 5.

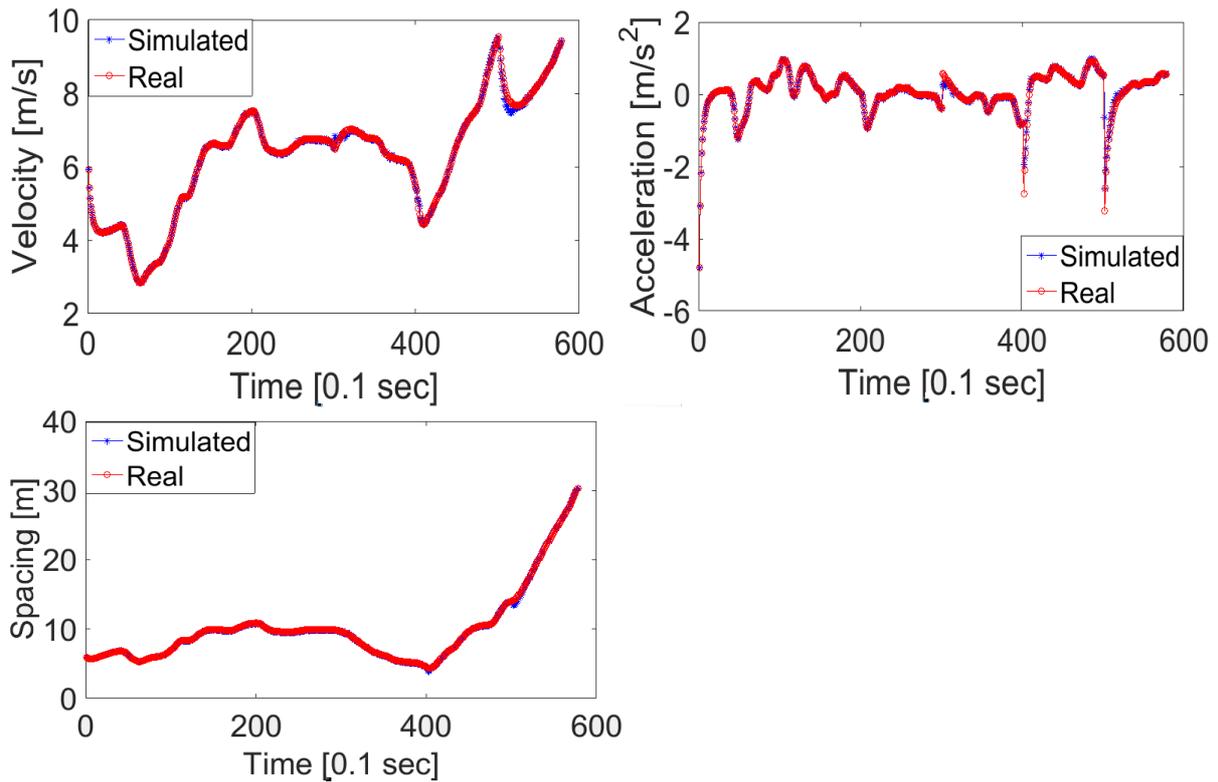


Figure 5. The comparison of real trajectories with simulated trajectories when the dynamic estimation of the parameter T , given by particle filtering, is used.

It should be noted that the IDM car-following model was used to generate trajectories for the follower vehicles, and the same car-following model was used in the calibration process. In the application to real data, this is the equivalent of assuming knowledge of the model underlying the behaviour of human drivers. Although this is obviously not the case, the findings of Ossen and Hoogendoorn (2008) may justify use of such simulated data. Therein, it was found that the characteristics of the followers' behaviour can be recovered by calibrating a car-following model to the data, even when the real model is different to the model used for calibration.

3.4 Objective function

The objective function defines a measure of error that is intended to be minimised. For this purpose, one needs to choose among measures of performance (MOPs), such as

spacing, speed, and acceleration, in addition to an appropriate error test (functional form of the defined error), such as root mean square error (RMSE) and root mean square percentage error (RMSPe), as outlined in numerous studies in the literature (Punzo and Simonelli 2007, Ossen and Hoogendoorn 2008, Treiber and Kesting 2013, Ranjitkar, Nakatsuji and Asano 2004).

In Punzo and Simonelli (2007) the inter-vehicle spacing was suggested as the most reliable MOP. In this work, however, it was found that the best result is obtained when a combination of errors on spacing, velocity, and acceleration was used in the objective function instead of a single variable. This is due to the use of the information available on all variables, which avoids outliers and non-smooth modelled data in any of the three measures individually. In Ossen and Hoogendoorn (2008), in addition to the different variables for calibration, the use of a combination of speed and spacing in the objective function was investigated. Therein, despite the fact that the use of a combinatory objective function including both the spacing and the velocity was found to be dependent on the specific model used, it was concluded that when such prior information about the model is lacking, the use of an objective function including both speed and spacing could be advantageous. Here, a uniformly weighted sum of squared errors of all three variables was used, which is an extension to the suggestion made by Ossen and Hoogendoorn (2008). The accuracy of the acceleration trajectories in the NGSIM data is somewhat questionable, as pointed out by Thiemann, Treiber and Kesting (2008), but excluding the acceleration error between the predicted values and the real values from the objective function results in randomly fluctuating estimates of acceleration with unrealistically large values of jerk. This can be avoided by including the acceleration error in the objective function with a low weight to suppress the significant influence of these inaccurate data on the estimation process. Figure 6

illustrates the simulated acceleration trajectory when the acceleration error is excluded from the objective function. Although in this case a slight improvement in the simulated velocity and spacing trajectories is obtained, this improvement comes at the cost of the acceleration, as can be seen from the figure.

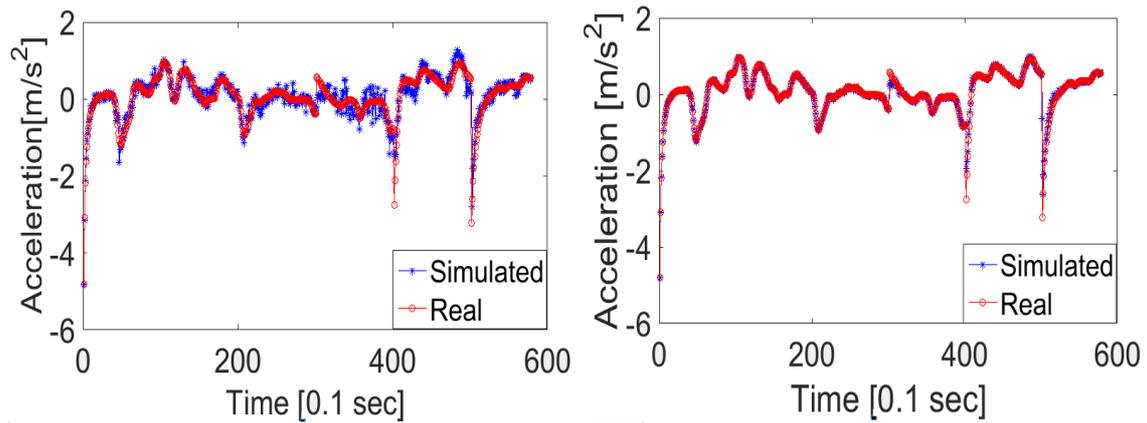


Figure 6. Comparison of the simulated accelerations with the real values when the acceleration error is: a) excluded from the objective function; b) included in the objective function.

3.5 Interpreting dynamic parameter estimations

As was shown in Figure 4, although the “jumps” in the values of the model parameters are visually identifiable, the resulting estimates are much harder to interpret when the method is applied to real data. This makes the identification of the points where sudden changes in the model parameters take place difficult, which is due to two reasons: 1) the actual underlying model is not known in advance; and 2) the changes are much smaller but more frequent. As one would expect from human drivers, they do not drive in a crisp and deterministic fashion, and neither do they immediately change their underlying driving attributes as soon as they reach a different traffic condition; instead a smooth and gradual change in driving behaviour is to be expected from them.

Hence, a way to identify significant changes and to filter out the smooth fluctuations from the dynamic model parameter estimate is required. A simple approach is adopted here for this purpose, whereby the points where maximum changes in the subsequent values of the parameter under estimation are identified. These points are referred to as “breaking points”. Following that, the model parameter under investigation is separately calibrated for each interval between the breaking points.

The detection of breaking points is governed by two conditions, both of which must hold for a breaking point to exist:

- 1) The change in the value of model parameter is greater than a certain value, set to be 0.5 *sec* for parameter T here.
- 2) The distance between each two breaking points is greater than a certain value. This condition is imposed to avoid frequent changes of the parameter in a short interval, and its implementation may also be justified by the fact that frequent and sudden changes in driving behaviour and driving parameters in a short time interval are highly unlikely among human drivers.

The value of 5 seconds (50 time steps for the NGSIM dataset) is used here.

The application of the proposed discretisation method to the result illustrated in Figure 4 leads to the correct identification of the jumps. Subsequently, parameter T is recalibrated in separate time intervals: [0, 300], [300, 400], [400, 500], and [500, 600].

Figure 7 shows the promising results obtained using this method.

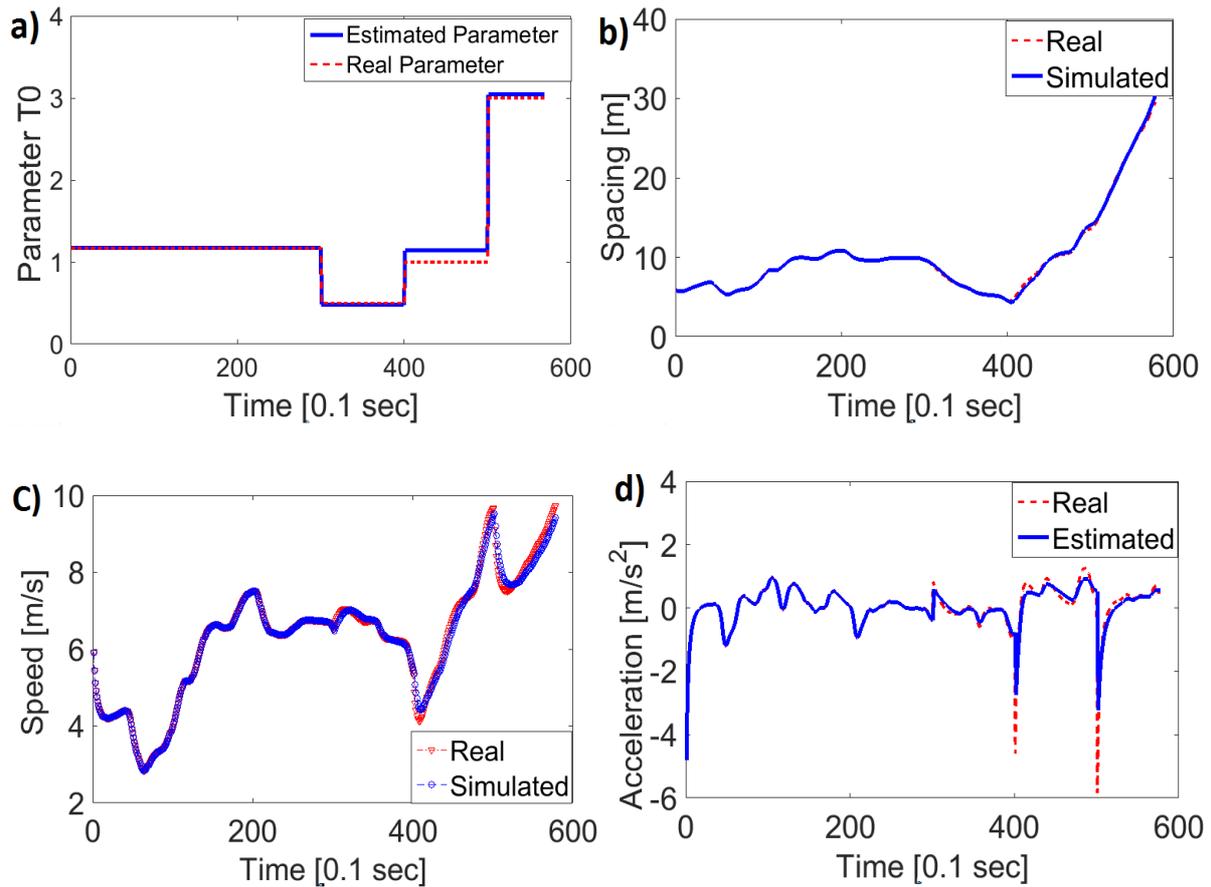


Figure 7. Comparison of the simulated trajectories when averaging between the breaking points is applied with real results for: a) the estimation of parameter T; b) spacing; c) speed; d) acceleration.

It can be seen that not only the points where the parameter is changed are identified correctly, but also that the values of the parameter within corresponding intervals are estimated with very high accuracy. Hence, the acceleration, velocity, and spacing trajectories are generated with significantly better accuracy than any conventional calibration method.

4. Results

In the previous section it was shown that using the particle filtering along with the proposed discretisation method, the changes in the model parameters can be identified and consequently the changes in the driving behaviour can be captured. In this section,

this method is applied to the NGSIM trajectory dataset to investigate the question of the identification of the adaptive driving behaviour.

4.1 Application to the NGSIM dataset

The functionality of the proposed method was illustrated using simulated data. In this section the proposed method is applied to a platoon of nine vehicles driving in the second lane to investigate the following two issues: 1) whether the assumption of systematic changes in driving attributes can be validated; and 2) whether these changes can be identified using car-following models, such as the IDM, and a dynamic system identification method, such as particle filtering. The procedure is as follows:

1. The five model parameters $\{a, b, v_d, s_0, T\}$ are calibrated using a genetic algorithm to minimise the sum of squared errors across all the three variables, namely, spacing, speed, and acceleration (Equation 6).

$$U = \sum_{i=1}^n \left((s_i^{obs} - s_i^{model})^2 + (v_i^{obs} - v_i^{model})^2 + (a_i^{obs} - a_i^{model})^2 \right) \quad (6)$$

where: the abbreviations “obs” and “model” denote the observed value and the modelled value respectively; n is the number of sample points; and s, v , and a denote the spacing, velocity, and acceleration respectively. The objective function above is the sum of the squared Euclidean distances between the three-dimensional observed states and the modelled states.

2. At the second step, the parameters $\{a, b, v_d, s_0\}$ are fixed to their calibrated values, while parameter T is being tracked given the lead vehicle’s trajectory and the real trajectory of the follower vehicle. The calibrated values for all the vehicles in the platoon are reported in Table 2.

3. The dynamic estimates of parameter T in several runs are then analysed using the method described in Section 3.5 to identify the breaking points.
4. Once the breaking points are identified, parameter T is then calibrated once more for each time interval between the breaking points.

Table 2 The calibrated values of the parameters

Parameters	V348	V343	V354	V362	V368	V378	V381	V391
a	1.598	0.886	1.620	1.688	2.681	0.815	0.824	1.087
b	5.000	0.602	5.000	5.000	0.500	1.509	0.500	5.000
V_d	11.412	33.298	12.903	10.000	33.300	33.298	33.299	15.929
s_0	1.000	2.529	5.000	3.319	4.843	4.848	3.164	1.000
T	1.094	0.400	1.952	0.903	0.881	0.400	0.695	1.146

All the vehicles observed remain in the platoon for the whole duration of the experiment, which means that the dynamics are undisturbed by any lane changing attempts. Figure 8 illustrates the application of the proposed method to one of the vehicles, and the top-left graph illustrates the discretised parameter estimate.

It should be noted that when applied to the dynamic parameter estimates for real trajectories, the proposed discretisation method yields breaking points that are less robust compared to the investigated case of simulated data. In other words, the breaking points are not always uniquely identified, and while some are detected with a high level of certainty, others may only be detected in a small percentage of cases. Herein, only the points that were detected in more than 50% of cases were selected.

The discretised parameter profile is subsequently used to simulate the driving behaviour for the follower vehicle. The comparison of the simulated states (spacing,

speed, and acceleration) with the real states points to the accuracy of the simulated behaviour. The reason why the acceleration estimates are less solid than the spacing and speed estimates is due to the low weight of the acceleration variable in the objective function, as explained earlier.

An interesting finding of this work that can be identified from Figure 8, is the correlation between the estimate of parameter T, and speed. This will be explained further in the following section.

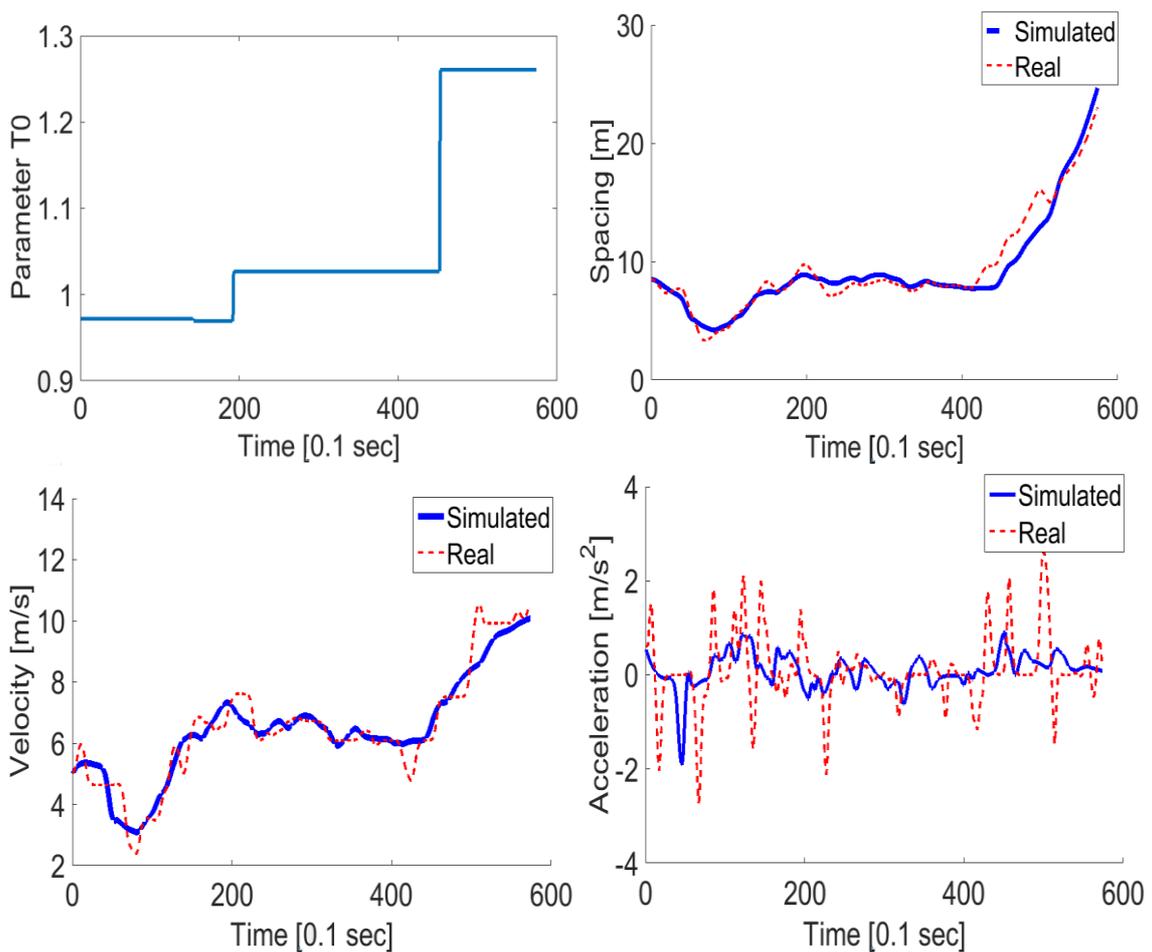


Figure 8. Trajectories resulting from application of the proposed method to vehicle no. 348 of the NGSIM data.

4.2 Analysis of the parameter estimates

Figure 9 illustrates the resulting parameter estimates for the vehicles, based on which highly accurate estimates of the spacing and velocity trajectories can be obtained. Table 2 summarises the errors in the estimation of velocity and spacing.

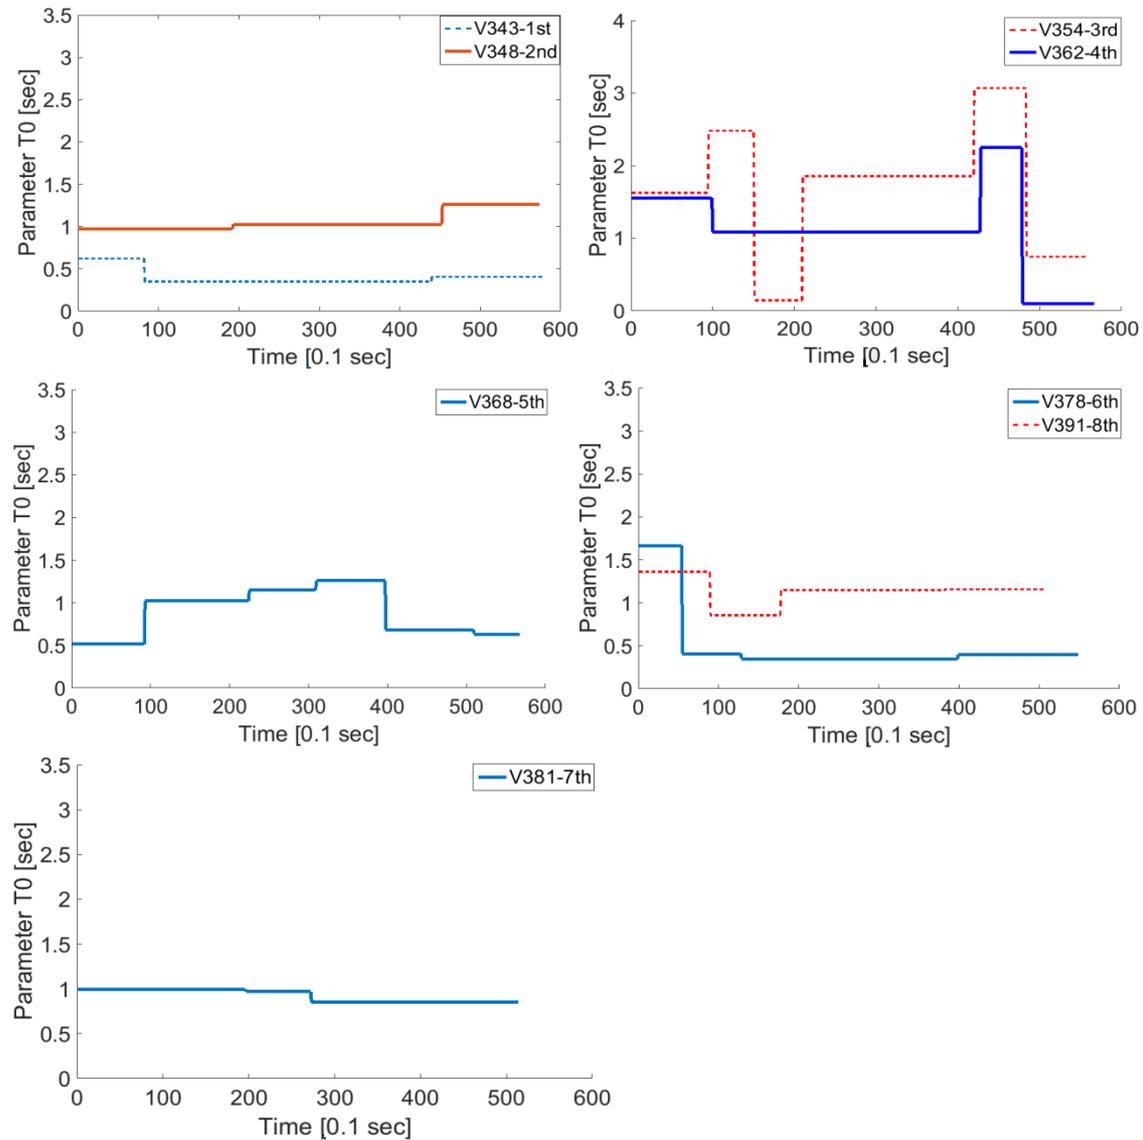


Figure 9. Parameter estimates for the eight vehicles following vehicle no. 329 in the NGSIM data. The position of each vehicle inside the platoon is specified in front of the vehicle ID no.

Table 3. Measures regarding quality of fit for each of the vehicles in the platoon

	V348	V343	V354	V362	V368	V378	V381	V391
Average absolute error for spacing	0.7366	0.8333	1.8907	1.0251	0.5108	0.7039	0.8268	1.7798
Average absolute error for speed	0.3885	0.5072	0.6117	0.5066	0.4249	0.5032	0.4805	0.6909

One of the interesting findings is that in the majority of investigated trajectories, a noticeable relationship between the average speed and estimate of parameter T can be observed. In particular, from the parameter estimates related to vehicles with IDs 348, 354, 362, and to a lesser extent 343, 378, 391, it can be seen that with the increases in the average speed, the estimate of parameter T increases, and that sudden drops in the average speed results in drops of parameter T . The detection of common patterns is an encouraging result, as it points to a driving phenomenon that the car-following model fails to account for.

However, interestingly, two other patterns can be observed within the estimates for this platoon: 1) the inverse relation with the average speed, as in the case of vehicle no. 368; and 2) irrelevant or no changes in the estimated parameter with respect to average speed, which is the case for vehicle no. 381. Similar patterns are observed in many other examined vehicles, and can be most likely be attributed to differences in driving styles, intentions (such as preparation for performing a lane change), or maybe a more complicated relation between the average speed and spacing, which could describe the changes in the model parameter better. Moreover interestingly, in a statistically significant number of cases, the breaking points are detected at a point in time where there has been a change in the driving conditions. For instance, considering the velocity profile of the vehicle no. 348 (Figure 8), it can be seen that the two

breaking points identified correspond to points where: 1) there is a transition from driving through a shockwave into more homogeneous congested traffic, at about $t = 20$ s; and 2) there is a transition from homogenous congested traffic to a less congested state where the vehicle starts accelerating at about $t = 43$ s.

It should be acknowledged here that, indeed, the random nature of driving may be amplified at low speeds and under stop-and-go conditions, and therefore decisive conclusions can only be made when sufficiently large numbers of suitable data are analysed. A suitable dataset for this purpose would be one consisting of trajectories with long observation times, where large enough numbers of drivers can be tracked through different driving conditions. The implementation of the proposed framework on such a dataset would enable the analysis and interpretation of the jumps in the parameter values in a broader perspective, and would allow the modification of the method and its parameters for better performance. The further investigation of these topics and the application of the method to more trajectories will shed more light on some of these issues.

5. Conclusions and future work

In this paper, particle filtering was utilised to examine the dynamic behaviour of drivers in different traffic conditions. In order to interpret the estimates given by the particle filtering process, a simple discretisation method was used, and promising results from its application to simulated and real data were obtained. This helped isolate minor fluctuations, which could be due to the fuzzy and stochastic nature of human driving, or minor errors in the modelling of car-following behaviour, and to convert the raw estimates given by the particle filtering process to an interpretable form.

The application of this method to real data delivered interesting results. Specifically, for a large number of cases, an interesting relationship between average

speed and the parameter under investigation was observed. This frequent pattern may point to a common driving behaviour that may not be addressed by the mathematical structure of the model under investigation. Moreover, two additional patterns were, interestingly, observed: 1) an inverse relation with the average speed; and 2) no relation with average speed. Additionally, in a significant number of cases the points that were detected as breaking points seemed to be the ones where, indeed, a change in the driving condition took place. Therefore, the employed framework was found to have great potential in investigating the properties of traffic flow, as well as in examining the robustness and performance of car-following models.

In future work, the application of suitable clustering methods, such as consolidated fuzzy clustering (Ma and Andréasson 2007) will be considered for grouping the estimation results. Moreover, due to the stochastic nature of particle filtering, the values of the breaking points identified are subject to changes in consecutive runs. The uncertainty arising from this issue could be tackled by calculating confidence intervals for these values. Finally, in order to draw reliable conclusions about how driving behaviour may change with reference to car-following models, an analysis of larger groups of trajectory data needs to be carried out.

References

- Ahmed, K. I. 1999. "*Modeling drivers' acceleration and lane changing behavior*" PhD Thesis, Massachusetts Institute of Technology.
- Arulampalam, M. S., S. Maskell, N. Gordon , and T. Clapp. 2002. "A tutorial on particle filters for online nonlinear/non-Gaussian Bayesian tracking." *IEEE Transactions on Signal Processing* 50, no. 2: 174-188.

- Brackstone, M., and M. McDonald. 1999. "Car-following: a historical review." *Transportation Research Part F: Traffic Psychology and Behaviour* 2, no. 4: 181–196.
- Ciuffo, B., V. Punzo, and M. Mon. 2014. "Global sensitivity analysis techniques to simplify the calibration of traffic simulation models. Methodology and application to the IDM car-following model." *IET Intelligent Transport Systems* 8, no. 5: 479 – 489.
- Fritzsche, H.T. 1994. "A model for traffic simulation." *Traffic Engineering and Control*: 317–321.
- Halkias, John, and James Colyar. 2006. *NGSIM Interstate 80 Freeway Dataset*. Washington, DC, USA: US Federal Highway Administration, FHWA-HRT-06-137.
- Hoogendoorn, S., S. Ossen, M. Schreuder , and B. Gorte. 2006. "Unscented Particle Filter for Delayed Car-Following Models Estimation." *Proceedings of the IEEE ITSC 2006 IEEE Intelligent Transportation Systems Conference*. Toronto, Canada.
- Isermann, R. 1984. "Process Fault Detection Based on Modeling and Estimation Methods-A Survey." *Automatica* 20, no. 4: 387–404.
- Jacques , J., C. Lavergne, and N. Devictor. 2006. "Sensitivity analysis in presence of model uncertainty and correlated inputs." *Reliability Engineering & System Safety* 91, no. 10-11: 1126–1134.
- Kesting, A., and M. Treiber. 2009. "Calibrating Car-Following Models by Using Trajectory Data: Methodological Study." *Transportation Research Record: Journal of the Transportation Research Board* 2088: 148-156.

- Ma, Xiaoliang , and I. Andréasson. 2007. "Behavior Measurement, Analysis, and Regime Classification in Car Following." *IEEE TRANSACTIONS ON INTELLIGENT TRANSPORTATION SYSTEMS* 8, no. 1: 144-156.
- Montanino, M., and V. Punzo. 2013. "Making NGSIM Data Usable For Studies On Traffic Flow Theory." *Transportation Research Record*: 99-111.
- Montanino, M., and V. Punzo. 2013. *Reconstructed NGSIM I80-1. COST ACTION TU0903 - MULTITUDE*. <http://www.multitude-project.eu/exchange/101.html>.
- Munoz, J. C., and C. F. Daganzo. 2002. "MOVING BOTTLENECKS: A THEORY GROUNDED ON EXPERIMENTAL OBSERVATION." *Transportation and Traffic Theory in the 21st Century. Proceedings of the 15th International Symposium on Transportation and Traffic Theory*. Adelaide, Australia. 441-461.
- Ossen , S., and S. Hoogendoorn. 2008. *Calibrating car-following models using microscopic trajectory data*. Delft, Netherlands: Delft University of Technology.
- Ossen, S., and S. P. Hoogendoorn. 2007. "Car-following behavior analysis from microscopic trajectory data." *Transportation Research Record: Journal of the Transportation Research Board* Volume 1934 / 2005 Traffic Flow Theory 2005: 13-21.
- Punzo, V., and F. Simonelli. 2007. "Analysis and comparison of microscopic traffic flow models with real traffic microscopic data." *Transportation Research Record: Journal of the Transportation Research Board* 1934, no. 1: 53-63.
- Ranjitkar, P., T. Nakatsuji, and M. Asano. 2004. "Performance Evaluation of Microscopic Traffic Flow Models with Test Track Data." *Transportation Research Record: Journal of the Transportation Research Board* 1876 , no. 1: 90-100.

- Saltelli, A., P. Annoni, I. Azzini, F. Campolongo, M. Ratto, and S. Taranto. 2010. "Variance based sensitivity analysis of model output. Design and estimator for the total sensitivity index." *Computer Physics Communications* 181, no. 2: 259–270.
- Thiemann, C., M. Treiber, and A. Kesting. 2008. "Estimating Acceleration and Lane-Changing Dynamics Based on NGSIM Trajectory Data." *Transportation Research Record: Journal of the Transportation Research Board* 2088: 90-101.
- Treiber, M., A. Hennecke, and D. Helbing. 2000. "Congested traffic states in empirical observations and microscopic simulations." *Physical Review E* 62, no. 2 : 1805–1824.
- Treiber, M., A. Kesting, and D. Helbing. 2006. "Understanding widely scattered traffic flows, the capacity drop, and platoons as effects of variance-driven time gaps." *Phys. Rev. E* 74, no. 1: 016123.
- Treiber, M., and A. Kesting. 2013. "Microscopic Calibration and Validation of Car-Following Models – A Systematic Approach." *20th International Symposium on Transportation and Traffic Theory (ISTTT 2013)*. Noordwijk, Netherlands, 922–939.
- van der Merwe, R., A. Doucet, J. F. de Freitas, and E. Wan. 2000. *The unscented particle filter, Technical Report CUED/F-INFENG/TR 380*, . Cambridge University Engineering Department.
- Venkatasubramaniana, V., R. Rengas, K. Yinc, and S. N. Kavurid. 2003. "A review of process fault detection and diagnosis: Part I: Quantitative model-based methods." *Computers & Chemical Engineering* 27, no. 3: 293–311.

- Wiedemann, R. 1974. *Simulation des Strassenverkehrsflusses*. Karlsruhe, Germany: Schriftenreihe des Instituts für Verkehrswesen der Universität Karlsruhe, Band 8.
- Wilson, R. E., and J. A. Ward. 2011. "Car-following models: fifty years of linear stability analysis – a mathematical perspective." *Transportation Planning and Technology* 34, no. 1: 3-18.
- Yang, Q., and H. N. Koutsopoulos. 1996. "A microscopic traffic simulator for evaluation of dynamic traffic management systems." *Transportation Research C* 4(3), 4, no. 3 : 113-129.