



City Research Online

City, University of London Institutional Repository

Citation: Azizi, M., Talatahari, S. & Giaralis, A. (2021). Optimization of Engineering Design Problems Using Atomic Orbital Search Algorithm. *IEEE Access*, 9, pp. 102497-102519. doi: 10.1109/access.2021.3096726

This is the published version of the paper.

This version of the publication may differ from the final published version.

Permanent repository link: <https://openaccess.city.ac.uk/id/eprint/26410/>

Link to published version: <https://doi.org/10.1109/access.2021.3096726>

Copyright: City Research Online aims to make research outputs of City, University of London available to a wider audience. Copyright and Moral Rights remain with the author(s) and/or copyright holders. URLs from City Research Online may be freely distributed and linked to.

Reuse: Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

City Research Online:

<http://openaccess.city.ac.uk/>

publications@city.ac.uk

Received June 25, 2021, accepted July 6, 2021, date of publication July 12, 2021, date of current version July 26, 2021.

Digital Object Identifier 10.1109/ACCESS.2021.3096726

Optimization of Engineering Design Problems Using Atomic Orbital Search Algorithm

MAHDI AZIZI¹, SIAMAK TALATAHARI^{1,2}, AND AGATHOKLIS GIARALIS³

¹Department of Civil Engineering, University of Tabriz, Tabriz 5166616471, Iran

²Faculty of Engineering, Near East University, 99150 Nicosia, Turkey

³Department of Civil Engineering, City, University of London, London EC1V 0HB, U.K.

Corresponding author: Agathoklis Giaralis (agathoklis.giaralis.1@city.ac.uk)

This work was supported by the Engineering and Physical Sciences Research Council (EPSRC), U.K., under Grant EP/M017621/1. The work of Mahdi Azizi and Siamak Talatahari was supported by the University of Tabriz under Grant 1615.

ABSTRACT In this paper, optimum design of engineering problems is considered by means of the Atomic Orbital Search (AOS), a recently proposed metaheuristic optimization algorithm. The mathematical development of the algorithm is based on principles of quantum mechanics focusing on the act of electrons around the nucleus of an atom. For numerical investigation, 20 of well-known constrained design problems in different engineering fields are considered; some of which have been benchmarked by the 2020 Competitions on Evolutionary Computation (CEC 2020) for real-world optimization purposes. Statistical results including the best, mean, worst and standard deviation of multiple optimization runs are reported for the AOS algorithm. These results are compared to similar data from previous metaheuristic algorithms found in the literature to establish the efficiency and usefulness of the AOS. It is concluded that the AOS has acceptable behavior in dealing with all the considered constrained optimization problems while the maximum difference of about 40% between the best optimum values of the AOS and other approaches is noted for the robot gripper benchmark problem.

INDEX TERMS Atomic orbital search, engineering design, competition on evolutionary computation, constrained optimization.

I. INTRODUCTION

Optimization is a process of maximizing or minimizing a predefined objective function which may be subjected to multiple design constraints. This is relevant to decision-making and to engineering design across disciplines and stakeholders. For example, chief executive officers aim to maximize the overall profit from investments in engineering construction and infrastructure. Further, practicing engineers aim to minimize resources and materials used in designing components, structures, or processes. In this regard, optimization is a ubiquitous approach to facilitate rationalized decision-making and engineering design. Indeed, inventory, production, machine learning, design procedures and machine scheduling are some of the important problems addressed by optimization in engineering fields.

The two most important facets of optimization are the solution algorithms and the mathematical formulation of

the optimal design problem. Optimization algorithms should be conceptualized properly by an established mathematical model to support computationally efficient optimization solutions. Additionally, mathematically rigorous formulations or numerical descriptions of the optimal design problems are also required. The latter facet is addressed based on the physics of engineering problems and on developments in computer science. However, the development of efficient optimization algorithms leading to improved optimal solutions for complex problems is a field of open research. Whilst gradient-based optimization methods have been utilized for many years for the purpose, they are known to have numerous deficiencies which led to the birth and pursue of metaheuristic optimization algorithms. The latter algorithms involve an iterative procedure in which an optimum solution is sought by conducting some random perturbations and search loops which are defined by drawing inspiration from the lifestyle of different leaving creatures (bio-inspired) or other physics-based concepts. Some of the most well-known metaheuristics optimization algorithms are the Genetic Algorithm (GA) [1],

The associate editor coordinating the review of this manuscript and approving it for publication was Yilun Shang.

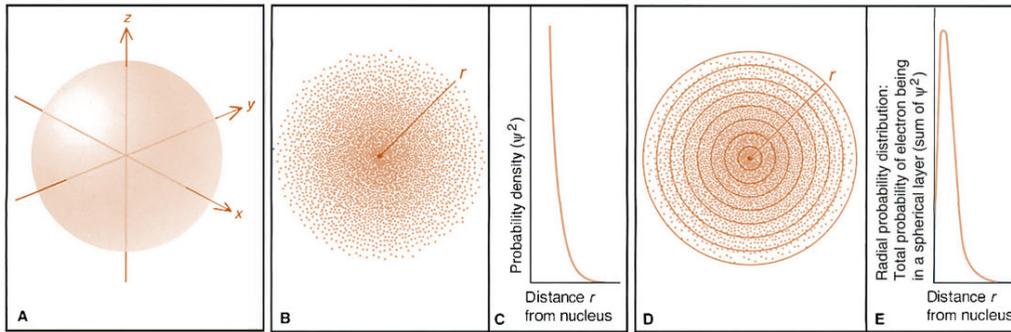


FIGURE 1. Atomic orbital model and electron density configuration.

Ant Colony Optimization (ACO) [2], Particle Swarm Optimization (PSO) [3], Imperialistic Competitive Algorithm (ICA) [4], Firefly Algorithm (FA) [5], Whale Optimization Algorithm (WOA) [6], Symbiotic Organisms Search (SOS) [7], Ray Optimization Algorithm (ROA) [8], Flower Pollination Algorithm (FPA) [9], Earthworm optimization algorithm (EWA) [10], Crystal Structure Algorithm (CryStAl) [11], Material Generation Algorithm (MGA) [12], Heat Transfer Search (HTS) algorithm [13], Teaching Learning Based Optimization (TLBO) algorithm [14], Passing vehicle search (PVS) algorithm [15], Group Teaching Optimization (GTO) algorithm [16], Aquila Optimizer (AO) [17], Capuchin Search Algorithm (CSA) [18], Archimedes Optimization Algorithm (AOA) [19], and the Chaos Game Optimization (CGO) algorithm [20] and [21]. It also should be noted that some of the standard algorithms have been improved or hybridized for specific applications [22]–[34].

Besides, some of the other challenges in optimization of engineering design problems can be mentioned as the epsilon constraint based HTS algorithm for optimization of multi-objective engineering design problems [35], Layout optimization of wind farms with an improved version of TLBO [36], design optimization of engineering problems by a hybrid approach of TLBO and the Neural Network Algorithm (NNA) [37], Symbiotic Organisms Search (SOS) algorithm for optimum design of multi-objective constrained engineering problems [38], Bayesian optimization (BO) for optimum design of engineering design problems, optimum design of real-world problems by Seagull Optimization Algorithm (SOA) [39] and the Black Widow Optimization (BWO) algorithm for optimization purposes in engineering applications [40].

In this paper, optimum design of engineering problems is considered by means of the Atomic Orbital Search (AOS), which is a recently proposed metaheuristic algorithm by Azizi [41]. This algorithm is developed based on the quantum-based atomic model which follows principles of quantum mechanics governing the act of electrons around the nucleus of an atom. For numerical investigation, 20 of the well-known constrained design problems in different engineering fields are considered, some of which have been

benchmarked by the 2020 Competitions on Evolutionary Computation as CEC 2020 [42] for real-world optimization purposes. For statistical investigation, 25 independent optimization runs are conducted by considering 200000 objective function evaluations to evaluate the statistical results including the best, mean, worst and standard deviation while the results of other algorithms are also provided from the literature for conducting a comparative study.

II. ATOMIC ORBITAL SEARCH (AOS) ALGORITHM

A. PHYSICAL MOTIVATION

In this section, the AOS algorithm is presented in detail focusing on the inspirational concept of the approach alongside its mathematical model. This algorithm is inspired by the principles of quantum mechanics and the atomic orbital model, proposed by Erwin Schrodinger. In this model, electrons are assumed to move in waves with uncertain location instead of orbiting in set paths around the nucleus. In this regard, clouds of probability called orbitals are defined based on the probability of electron location. In the atomic theory developed based on quantum mechanics, an atomic orbital represents the wave-like behavior of electrons in atoms by means of a mathematical function. This mathematical function is utilized for calculating the probability of finding any electron in any specific region around the nucleus of an atom. In other words, the atomic orbital represents specific physical regions or spaces surrounding the nucleus which are probable locations of electrons (Fig. 1A). In Fig. 1B a snapshot of an atom is illustrated in which the electrons are moving around the nucleus by changing their instant positions with a wave-like behavior. In this setting, the electrons behave like a cloud of charge which instantly change their position over time. As presented in Fig. 1C, the positions of electrons around the nucleus are not deterministically defined so the location of electrons around nucleus is defined by means of probability density diagrams. The space around nucleus of an atom is divided into spherical concentric thin imaginary layers with specific radius of r to measure the probability of electrons being located at any specific distance from the nucleus (Fig. 1D). Since the volume of each specific layer increases faster than the probability density of that layer

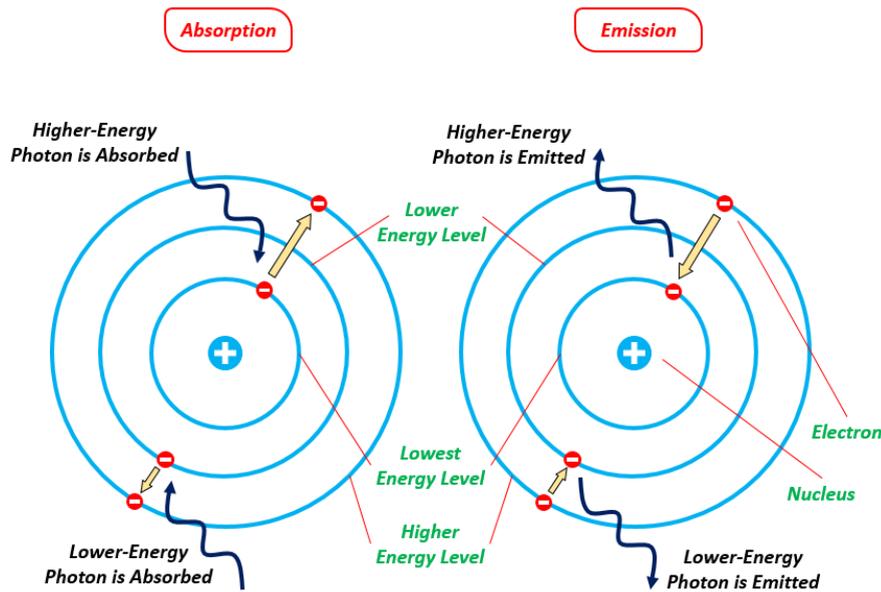


FIGURE 2. Schematic representation of atomic quantum staircase analogy.

(Fig. 1E), the total probability of detecting any electron in the outer imaginary layers is higher than detecting it in the inner ones.

According to the atomic orbital model, electrons in the ground state of energy are located within imaginary layers around the nucleus. For each imaginary layer with radius, r , a quantum number, n , is assigned which represents the energy level of the electrons positioned in that layer. The layers with higher n values represent the orbitals with larger r values and higher energy levels while the layers with smaller n values correspond to lower energy levels with smaller r values. The electrons in the cloud of charge around nucleus are excited by the interactions with other particles, moving into magnetic fields and also by acts of photons (lights) which result in energy emission or absorption in the atom. In this regime, some binding energy is determined for each electron which represents the amount of energy required for removing the electron from its orbital. Considering the quantum staircase analogy, movement of electrons between different orbitals are possible, resulting in changes to their energy levels. In this regard, if an electron absorbs an amount of energy less than the electron binding energy, it will undergo a transition to an outer orbital with higher energy value. Besides, if an electron emits an amount of energy more than the electron binding energy, it will be repositioned in an inner orbital with lower energy value. The schematic representation of quantum staircase analogy in atoms is illustrated in Fig. 2.

B. MATHEMATICAL MODEL

The AOS algorithm is inspired by the previously mentioned principles of atomic orbital model in which the emission and absorption of energy by atoms alongside the electron density configuration are in perspective. As the first step, several

solution candidates, \mathbf{X} , are considered which correspond to the position of electrons around the nucleus of the atom. The solution candidates are taken as the cloud of electrons around the nucleus of an atom while the search space is defined as a spherical space, divided into concentric imaginary layers. Mathematically, this is written as

$$\mathbf{X} = \begin{bmatrix} X_1 \\ X_2 \\ \vdots \\ X_i \\ \vdots \\ X_m \end{bmatrix} = \begin{bmatrix} x_1^1 & x_1^2 & \cdots & x_1^j & \cdots & x_1^d \\ x_2^1 & x_2^2 & \cdots & x_2^j & \cdots & x_2^d \\ \vdots & \vdots & & \vdots & \ddots & \vdots \\ x_i^1 & x_i^2 & \cdots & x_i^j & \cdots & x_i^d \\ \vdots & \vdots & & \vdots & \ddots & \vdots \\ x_m^1 & x_m^2 & \cdots & x_m^j & \cdots & x_m^d \end{bmatrix}, \quad \begin{cases} i = 1, 2, \dots, m. \\ j = 1, 2, \dots, d. \end{cases} \quad (1)$$

where X_i is the i -th solution candidate (electron) in the search space (electron cloud around nucleus of atom); m is the total number of solution candidates or electrons in the search space; $x_{i,j}$ is the j -th decision variable of the i -th solution candidate; d is the dimension of the considered problem.

A random initialization procedure is employed for determining the initial positions of the electrons around the nucleus. Following the atomic model, each electron has a specific state of energy which is defined as the objective function of the solution candidates to be minimized. Therefore, the electrons with lower energy levels are represented by solution candidates with better (lower) values of the objective function while the solution candidates with worse (higher) values of objective function are utilized for electrons with higher energy levels. The following notation is introduced

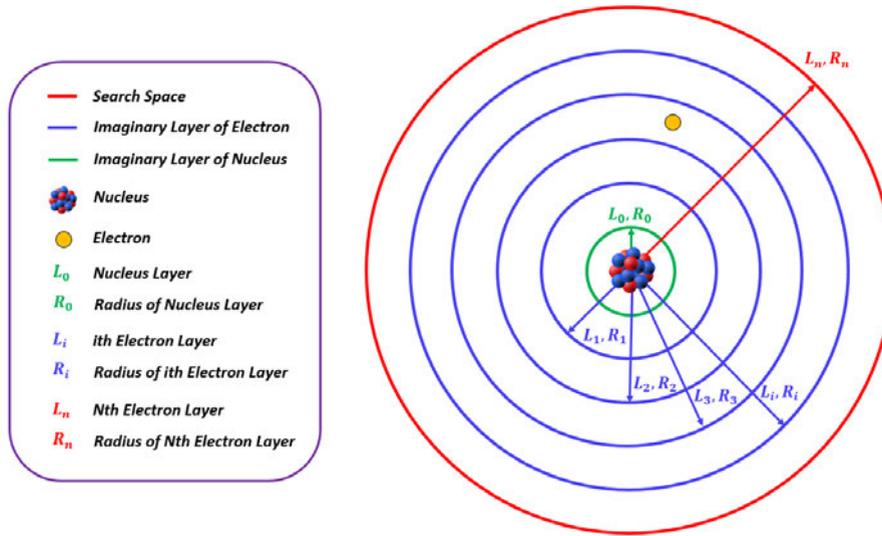


FIGURE 3. Schematic presentation of imaginary layers around nucleus.

accordingly

$$\mathbf{E} = \begin{bmatrix} E_1 \\ E_2 \\ \vdots \\ E_i \\ \vdots \\ E_m \end{bmatrix}, \quad i = 1, 2, \dots, m. \quad (2)$$

where \mathbf{E} is the vector of objective function values; E_i is the energy level of i -th solution candidates; m represents the total number of solution candidates or electrons in the search space

To represent the imaginary layers around nucleus mathematically, a random integer number, n , is assigned corresponding to the number of spherical imaginary layers, L , around the nucleus of atom. The imaginarily created layers represent the wave-like behavior of electrons around nucleus while the layer with smallest radius, L_0 , indicate the nucleus location and the rest, L_i the location of electrons. These aspects are presented in Fig. 3.

Based on the quantum-inspired atomic model, the instant locations of electrons are represented by an electron probability density diagram. This is mathematically modeled using a Probability Density Function (PDF). The latter is a mathematical function which specifies the probability of a variable value to lie within a predefined range. The PDF is used for distributing the solution candidates to the imaginary layers around nucleus. To this end, a sorting process is conducted in which the solution candidates with better objective function values (higher PDF values) are positioned in the inner layers with lower energy levels while the candidates with worse objective function values (lower PDF values), are located in the outer layers. In this regard, any of the Weibull, normal, logistic or Kernel PDF can be adopted for this purpose. Herein, the log-normal Gaussian distribution function

is utilized. The position determination for electrons (solution candidates) with a log-normal Gaussian distribution function is schematically illustrated in Fig. 4. In this distribution, the overall existence probability of the electrons in the second layer (L_1 to L_2) is higher than the first layer (L_0 to L_1) which represents the real wave-like behavior of the electrons in the quantum-based atomic model.

Using the above position determination process for the electrons, the solution candidates are distributed in different layers. The vector \mathbf{X}^k containing the candidates in n different layers and their objective function \mathbf{E}^k values are represented as follows

$$\mathbf{X}^k = \begin{bmatrix} X_1^k \\ X_2^k \\ \vdots \\ X_i^k \\ \vdots \\ X_p^k \end{bmatrix} = \begin{bmatrix} x_1^1 & x_1^2 & \dots & x_1^j & \dots & x_1^d \\ x_2^1 & x_2^2 & \dots & x_2^j & \dots & x_2^d \\ \vdots & \vdots & & \vdots & \ddots & \vdots \\ x_i^1 & x_i^2 & \dots & x_i^j & \dots & x_i^d \\ \vdots & \vdots & & \vdots & \ddots & \vdots \\ x_p^1 & x_p^2 & \dots & x_p^j & \dots & x_p^d \end{bmatrix}, \quad \begin{cases} i = 1, 2, \dots, p. \\ j = 1, 2, \dots, d. \\ k = 1, 2, \dots, n. \end{cases} \quad (3)$$

$$\mathbf{E}^k = \begin{bmatrix} E_1^k \\ E_2^k \\ \vdots \\ E_i^k \\ \vdots \\ E_p^k \end{bmatrix}, \quad \begin{cases} i = 1, 2, \dots, p. \\ k = 1, 2, \dots, n. \end{cases} \quad (4)$$

where X_i^k is the i -th candidate positioned in the k -th layer; n is the total number of imaginarily layers; p shows the number of candidates in the k -th layer; d represents the dimension

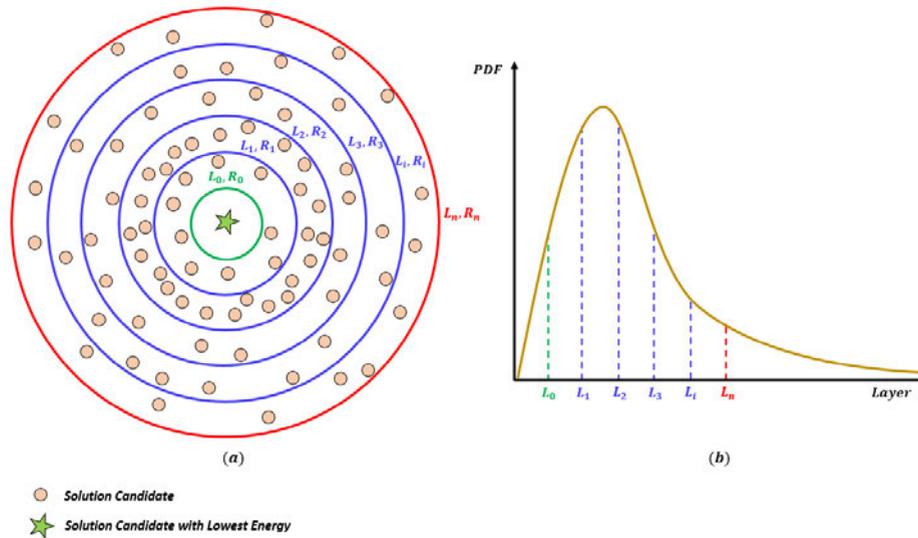


FIGURE 4. Position determination of electrons (solution candidates) with PDF distribution.

for considered problem; E_i^k represents the values of objective function for the i -th candidate positioned in the k -th layer. The best candidate in the k -th layer is considered as the electron with lowest levels of energy, LE^k , and the global best of all solution candidates represents the electron with lowest energy level, LE , at the nucleus location (Azizi 2020).

According to the principles of the atomic orbital model, the electrons are taken to be in the ground state of energy level. The concept of binding state in quantum-based atomic model represents the fact that electrons are not affected by others in this state. This attribute is mathematically modeled by considering the independency of solution candidates in the search space. In addition, the binding energy represents the energy amount that is required to move an electron to a different layer. To this end, the concepts of binding state and binding energy are mathematically modeled by considering the mean values of the position vectors and the objective function values of the solution candidates. For each of the considered imaginary layers, the binding state and binding energy are calculated as

$$BS^k = \frac{\sum_{i=1}^p X_i^k}{p}, \quad \begin{cases} i = 1, 2, \dots, p. \\ k = 1, 2, \dots, n. \end{cases} \quad (5)$$

$$BE^k = \frac{\sum_{i=1}^p E_i^k}{p}, \quad \begin{cases} i = 1, 2, \dots, p. \\ k = 1, 2, \dots, n. \end{cases} \quad (6)$$

where BS^k is the binding state and BE^k is the binding energy of the k -th imaginary layer.

Since the overall energy level of an atom is evaluated by considering the binding state and binding energy of all the electrons, the mathematical presentation of the mean values of the position vectors and the objective function of the solution candidates in the entire search space are

```

Procedure Atomic Orbital Search (AOS) Algorithm
Determine initial positions of solution candidates ( $X_i$ ) in the search space with  $m$  candidates
Evaluate fitness values ( $E_i$ ) for initial solution candidates
Determine binding state (BS) and binding energy (BE) of atom
Determine candidate with lowest energy level in atom (LE)
while Iteration < Maximum number of iterations
Generate  $n$  as the number of imaginary layers
Create imaginary layers
Sort solution candidates in an ascending or descending order
Distribute solution candidates in the imaginary layers by PDF
for  $k=1:n$ 
Determine binding state ( $BS^k$ ) and binding energy ( $BE^k$ ) of the  $k$ th layer
Determine the candidate with lowest energy level in the  $k$ th layer ( $LE^k$ )
for  $i=1:p$ 
Generate  $\varphi, \alpha, \beta, \gamma$ 
Determine PR
if  $\varphi \geq PR$ 
if  $E_i^k > BE^k$ 
 $X_{i+1}^k = X_i^k + \frac{\alpha \times (\beta \times LE - \gamma) \times BS}{k}$ 
else if  $E_i^k < BE^k$ 
 $X_{i+1}^k = X_i^k + \alpha_i \times (\beta_i \times LE^k - \gamma_i \times BS^k)$ 
end
else if  $\varphi < PR$ 
 $X_{i+1}^k = X_i^k + r_i$ 
end
end
end
Update binding state (BS) and binding energy (BE) of atom
Update candidate with lowest energy level in atom (LE)
end while
end Procedure
    
```

FIGURE 5. Pseudo-code of the AOS algorithm.

written as

$$BS = \frac{\sum_{i=1}^m X_i}{m}, \quad i = 1, 2, \dots, m. \quad (7)$$

$$BE = \frac{\sum_{i=1}^m E_i}{m}, \quad i = 1, 2, \dots, m. \quad (8)$$

In the quantum atomic model, electrons with different energy states change their location and move between different layers with different states of energy. This phenomenon is due to the act of photons to electrons as well as to interactions with other particles and magnetic fields. Herein, this phenomenon is utilized for updating the solution candidates during the optimization process in the mathematical model of the AOS algorithm. Specifically, the position of the solution candidates placed in the imaginary spherical layers is updated by considering the absorption or emission of photons

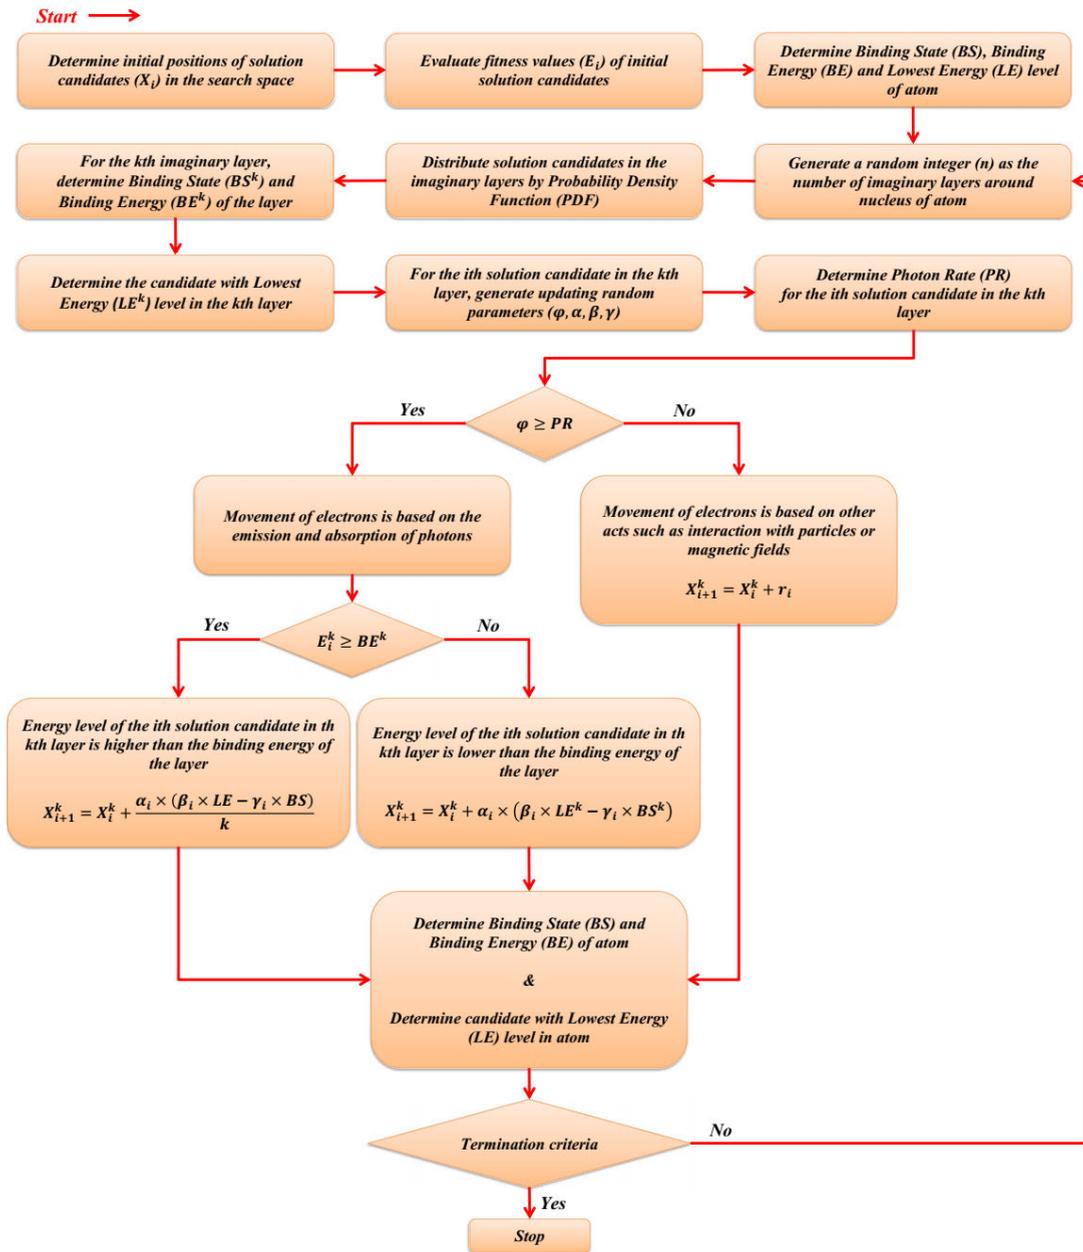


FIGURE 6. Flowchart of the AOS algorithm.

alongside other interactions with particles, while accounting for the energy level of electrons and the binding energy of the imaginary layers.

To facilitate the mathematical representation of the position updating process in the AOS algorithm, a randomly generated number, φ , uniformly distributed in the range of $[0,1]$, is assigned to each electron to represent the probability of action of photons or other interactions. To distinguish between different interactions on electrons, the photon rate, PR, parameter is introduced to represent the probability of different interactions on electrons. For $\varphi \geq PR$, the act of photons on the electrons becomes possible. In this case, the

energy level, E_i^k , for the i-th electron or solution candidate, X_i^k , in the k-th layer is compared to the binding energy of the k-th layer, BE^k . If $E_i^k \geq BE^k$, the solution candidates (electrons) emit some amount of energy (photon). Depending on the energy, the electron could reach the binding state, BS, of the atom or even the lowest state of energy, LE, in the atom. The position updating step for this case is written as

$$X_{i+1}^k = X_i^k + \frac{\alpha_i \times (\beta_i \times LE - \gamma_i \times BS)}{k}, \quad \begin{cases} i = 1, 2, \dots, p. \\ k = 1, 2, \dots, n. \end{cases} \quad (9)$$

TABLE 1. Basic characteristics of the considered engineering design problems.

No.	Name	D	g	h	Formulation
F_1	Industrial Refrigeration System	14	15	0	Andrei [43]
F_2	Three-Bar Truss	2	3	0	Gandomi et al. [44]
F_3	Planetary Gear Train	9	10	1	Savsani and Savsani [15]
F_4	Step-Cone Pulley	5	8	3	Rao [45]
F_5	Robot Gripper	7	7	0	Rao et al. [14]
F_6	Hydro-Static Thrust Bearing	4	7	0	Rao et al [14]
F_7	Four-Stage Gear Box	22	86	0	Kumar et al. [42]
F_8	Ten-Bar Truss	10	3	0	Yu et al. [46]
F_9	Rolling Element Bearing	10	9	0	Gupta et al [47]
F_{10}	Gas Transmission Compressor	4	1	0	Kumar et al. [42]
F_{11}	Tension/Compression Spring-Case 2	3	8	0	He et al. [48]
F_{12}	Gear Train	4	1	1	Zelinka and Lampinen [49]
F_{13}	Himmelblau's Function	5	6	0	Himmelblau [50]
F_{14}	Topology Optimization	30	30	0	Sigmund [51]
F_{15}	Steel I-Shaped Beam	4	2	0	Gandomi et al [44]
F_{16}	Piston Lever	4	4	0	Gandomi et al [44]
F_{17}	Corrugated Bulkhead	4	6	0	Gandomi et al [44]
F_{18}	Cantilever Beam	5	1	0	Gandomi et al [44]
F_{19}	Tubular Column	2	6	0	Gandomi et al [44]
F_{20}	Reinforced Concrete Beam	3	2	0	Gandomi et al [44]

D: Dimensions

g: Number of inequality constraints

h: Number of equality constraints

where X_i^k is the current and X_{i+1}^k is the updated i -th solution candidate (electron position) at the k -th imaginary layer; α_i , β_i and γ_i are uniformly distributed random numbers in the range of [0,1] which govern the amount of emitted energy.

On the antipode, if $E_i^k < BE^k$, the energy level of the i -th solution candidate in the k -th layer is lower than the binding energy of the considered layer so energy absorption becomes probable. In this case, the solution candidates (electrons) absorb some amount of energy (photon). Depending on the energy, the electron could reach the binding state of the k -th layer, BS^k , or even the lowest state of energy, LE^k , of the considered layer. The position updating step for this case is written as

$$X_{i+1}^k = X_i^k + \alpha_i \times (\beta_i \times LE^k - \gamma_i \times BS^k), \quad \begin{cases} i = 1, 2, \dots, p. \\ k = 1, 2, \dots, n. \end{cases} \quad (10)$$

For $\varphi < PR$, the absorption or emission of photons on electrons are not likely so moving into magnetic fields or interactions with other particles are in perspective. In this case, the position updating step for the solution candidates is written as

$$X_{i+1}^k = X_i^k + r_i, \quad \begin{cases} i = 1, 2, \dots, p. \\ k = 1, 2, \dots, n. \end{cases} \quad (11)$$

where r_i is a random number uniformly distributed in the range of [0,1].

Further to the above updating steps, the boundary violation of solution candidates alongside the termination criterion are also considered in the mathematical model of the AOS algorithm. In this regard, a flag is implemented in the AOS in which a boundary control for violating decision variables is determined while a predefined number of objective function evaluations or iterations can be utilized as termination criteria. In Fig. 5, the pseudo-code of AOS algorithm is provided while the flowchart of the algorithm is presented in Fig. 6.

TABLE 2. Best results of different approaches for the industrial refrigeration system problem.

	Andrei [43]	Present Study (AOS)
Best	0.032213008	0.032213001
x_1	0.001	0.001
x_2	0.001	0.001
x_3	0.001	0.001
x_4	0.001	0.001
x_5	0.001	0.001
x_6	0.001	0.001
x_7	1.524	1.524
x_8	1.524	1.524
x_9	5	5
x_{10}	2	2
x_{11}	0.001	0.001
x_{12}	0.001	0.001
x_{13}	0.0072934	0.007293401
x_{14}	0.0875558	0.087555832

III. BENCHMARK ENGINEERING DESIGN PROBLEMS

Constraint optimization problems emerge naturally in optimal engineering design in which precise handling of design constraints must be accounted for in minimizing/maximizing the objective function. In this regard, the AOS algorithm is herein applied to 20 well-known constrained design problems in different engineering fields are considered, some of which being benchmarked by the 2020 Competitions on Evolutionary Computation as CEC 2020 for real-world optimization purposes. In Table 1, a brief description of these design provided is provided.

IV. NUMERICAL INVESTIGATION

The results of the numerical study including the best optimum values of the AOS and other alternative algorithms alongside results statistics including the mean, worst and standard deviation are presented in this section. A simple penalty approach is considered as the constraint handling approach in dealing with these constraint problems.

A. INDUSTRIAL REFRIGERATION SYSTEM

This engineering design problem considers the optimum design of an industrial refrigeration system which has 14 design variables ($x_1 \sim x_{14}$) and 15 inequality design constraints. The complete mathematical formulation of this problem is presented by Andrei [43]. The best results of the AOS algorithm are presented in Table 2 alongside results from other optimization approaches. In addition, the mean, worst and standard deviation statistics for the AOS and alternative algorithms are provided in Table 3. It is seen that AOS is able to provide improved best and statistical results than the other metaheuristic approaches which represents the capability of the algorithm in dealing with difficult optimization problems.

B. THREE-BAR TRUSS

The total weight optimization of a three-bar truss structure is considered in this design example in which the objective function is formulated by determining the minimum required cross-sectional areas for the truss bars. This engineering

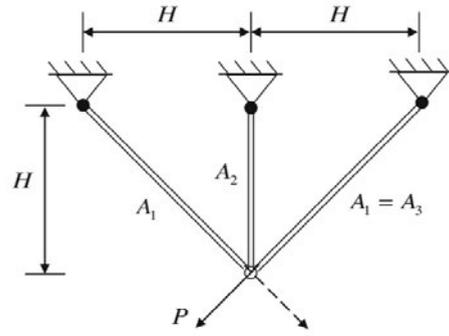


FIGURE 7. Visualization of the three-bar truss problem.

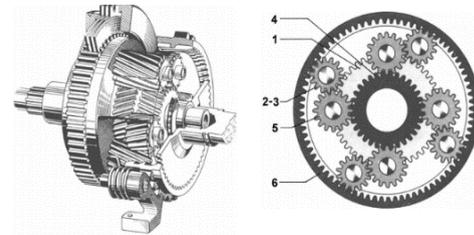


FIGURE 8. Visualization of the planetary gear train problem.

design problem has two design variables including the cross-sectional areas of the oblique bars (A_1) and straight bar (A_2) while there are only three inequality design constraints. In Fig. 7, a schematic presentation of this constraint design problem is shown. Gandomi et al. [44] provides the related mathematical formulations.

In Table 4, the best result of multiple optimization runs for the AOS and other algorithms in dealing with the three-bar truss problem are presented in which the optimum design variables and constraints are also provided. Most of the recently developed metaheuristics are capable of finding a similar optimum value; however, the AOS algorithm has also the ability of providing the so far best found optimum solution in this case. The statistical results of different approaches for this problem are also presented in Table 5 for comparative purposes. It is obvious that the AOS algorithm provides much better statistical results than previous approaches.

C. PLANETARY GEAR TRAIN

In this engineering design problem, the optimization of maximum errors in the gear ratio of the planetary gear train in the automobiles is considered. There are nine design variables including six integer variables for the number of teeth in the gears (N_1, N_2, N_3, N_4, N_5 and N_6) and three discrete design variables considering the modules of the first (m_1) gear, the number of planet gears (P), and the modules of the second (m_2) gear. This problem has ten inequality and one equality design constraints. In Fig. 8, a schematic presentation of this constraint design problem is prepared while Savsani and Savsani [15] provides the related mathematical formulations.

TABLE 3. Statistical results for the industrial refrigeration system problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
(IUDE) Kumar et al. [42]	0.0322	0.0322	0.0322	4.91E-18
(MAES) Kumar et al. [42]	0.0322	0.0340	0.0445	4.09E-03
(LSHADE) Kumar et al. [42]	0.0322	0.0323	0.0325	1.11E-04
Present Study (AOS)	0.032213	0.032351	0.032555	0.003146

IUDE: Improved Unified Differential Evolution Algorithm
MAES: Matrix Adaptation Evolution Strategy
LSHADE: Linear Success-History based Adaptive Differential Evolution

TABLE 4. Best results of different approaches for the three-bar truss problem.

	Gandomi et al. [44]	Ray & Liew [52]	Zhang et al. [53]	Garg [54]	Present Study (AOS)
Best	263.97156	263.8958466	263.8958434	263.8958433	263.8958433
A_1	0.78867	0.7886210370	0.7886751359	0.788676171219	0.7886751359
A_2	0.40902	0.4084013340	0.4082482868	0.408245358456	0.4082482866
$g_1(x)$	-0.00029	-8.275E-9	-2.104E-11	-1.587E-13	0
$g_2(x)$	-0.00029	-1.46392765	-1.46410161	-1.4641049	-1.4641016195
$g_3(x)$	-0.73176	-0.536072358	-0.5358983	-0.535895	-0.5358983805

TABLE 5. Statistical results for the three-bar truss problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
Gandomi et al. [44]	263.97156	264.0669	NA	0.00009
Ray & Liew [52]	263.8958466	263.9033	263.9033	1.26E-2
Zhang et al. [53]	263.8958434	263.8958436	263.8958498	9.72E-7
Garg [54]	263.8958433	263.8958437	263.8958459	5.34E-7
Present Study (AOS)	263.8958433	263.8958435	263.8958453	8.26E-9

TABLE 6. Best results of different approaches for the planetary gear train problem.

	Savsani & Savsani [15]	Present Study (AOS)
Best	0.525588	0.52325
N_1	34	40
N_2	25	21
N_3	33	14
N_4	32	19
N_5	23	14
N_6	116	69
P	4	3
m_1	2.5	1
m_2	1.75	2
$g_1(x)$	NA	-77
$g_2(x)$	NA	-73
$g_3(x)$	NA	-122
$g_4(x)$	NA	-0.5
$g_5(x)$	NA	-12.35490039
$g_6(x)$	NA	-15.82818888
$g_7(x)$	NA	-2.896913326
$g_8(x)$	NA	-780.4549698
$g_9(x)$	NA	-17
$g_{10}(x)$	NA	-17
$h(x)$	NA	-77

In Table 6 and Table 7, the best and statistical results of the different metaheuristic algorithms including the AOS algorithm are presented for the planetary gear train problem. By comparing the best and statistical results of different approaches, it is demonstrated that the AOS performs better than previous algorithms in dealing with this complex engineering design problem with different continues and discrete design variables.

D. STEP-CONE PULLEY

In this engineering design problem, the total weigh optimization of a step-cone pulley is considered in which there are five design variables for the width of the pulley (w) and the diameters of the steps in the pulley ($d_1, d_2, d_3,$ and d_4). This problem has three equality and eight inequality design constraints. In Fig. 9, a schematic presentation of this constraint design problem is prepared while Rao [45] have provided the related mathematical formulations.

For the step-cone pulley problem, the best results of different optimization runs considering the AOS and other alternatives are presented in Table 8 while the statistical results are provided in Table 9. It is found that the AOS is capable of providing outstanding best and statistical results in dealing with this problem. It also should be noted that the AOS provides lower values for the mean, worst and standard deviation of the results.

E. ROBOT GRIPPER

The robot gripper problem is one of the difficult engineering design problems in which the difference of the minimum and maximum force in the gripper is sought to be minimized by considering the displacement ranges of the gripper. This problem has seven design variables including the geometric properties of the robot while there are also seven inequality design constraints in the problem definition. In Fig. 10, a schematic presentation of this constraint design problem is prepared while Rao et al. [14] provide the related mathematical formulations.

TABLE 7. Statistical results for the planetary gear train problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
Rao & Savsani [55] (PSO)	0.53	0.5361934	NA	NA
Rao & Savsani [55] (ABC)	0.525769	0.5272922	NA	NA
Zhang et al. [53]	0.525589	0.525589	NA	NA
Savsani & Savsani [15]	0.525588	0.53063	NA	NA
Present Study (AOS)	0.52325	0.529848233	0.537058824	0.003894295

PSO: Particle Swarm Optimization
ABC: Artificial Bee Colony

TABLE 8. Best results of different approaches for the step-cone pulley problem.

	(TLBO) Rao et al. [14]	(WOA) Yildiz et al. [56]	(WCA) Yildiz et al. [56]	(MBA) Yildiz et al. [56]	Present Study (AOS)
Best	16.63451	16.6345213	16.63450849	16.6345078	16.08558875
d_1	40	40	40	40	38.40665412
d_2	54.7643	54.764326	54.764300	54.764300	52.85751197
d_3	73.01318	54.764326	54.764300	54.764300	70.44556099
d_4	73.01318	54.764326	54.764300	88.428419	84.51666791
w	73.01318	85.986297	54.764300	85.986242	89.98813622

TLBO: Teaching-Learning Based Optimization
WOA: Whale Optimization Algorithm
WCA: Water Cycle Algorithm
MBA: Mine Blast Algorithm

TABLE 9. Statistical results for the step-cone pulley problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
(TLBO) Rao et al. [14]	16.63451	24.0113577	74.022951	0.34
(WOA) Yildiz et al. [56]	16.6345213	20.93829477	24.8488259	3.3498
(WCA) Yildiz et al. [56]	16.63450849	17.53037682	18.83302997	0.9229
(MBA) Yildiz et al. [56]	16.6345078	16.702535	18.3237145	0.2627
Present Study (AOS)	16.08558875	16.29548945	16.80334816	0.177212917

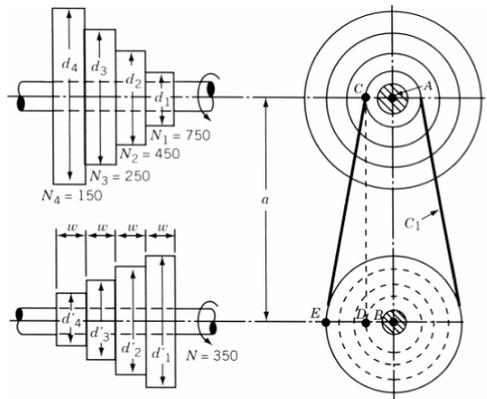


FIGURE 9. Visualization of the step-cone pulley problem.

The best results of the AOS and other approaches for the considered robot gripper problem are presented in Table 10 while the optimum design variables and design constraints are also provided for comparative purposes. In Table 11, the statistical results of different approaches considering multiple optimization runs are also presented. It is concluded that the AOS provides outstanding results than the other metaheuristic

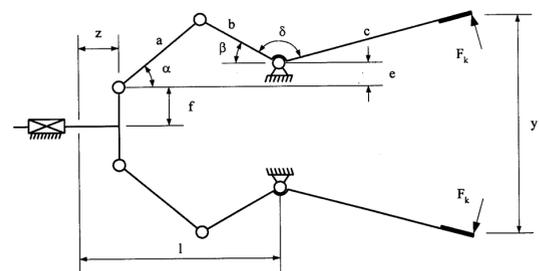


FIGURE 10. Visualization of the robot gripper problem.

tics. The maximum difference between the best results of the AOS and other algorithms is about 40%.

F. HYDRO-STATIC THRUST BEARING

In this engineering design problem, the optimum configuration of bearing power loss in the hydro-static thrust bearing system is considered in which four design variables including the recess radius (R_0), bearing step radius (R), flow rate (Q) and the oil viscosity (μ) with seven inequality design constraints are considered in the problem formulation. In Fig. 19, a schematic presentation of this constraint design problem

TABLE 10. Best results of different approaches for the robot gripper problem.

	(TLBO) Rao et al. [14]	Present Study (AOS)
Best	4.247643634	2.54383687
a	150	149.9973899
b	150	149.880236
c	200	200
d	0	0
e	150	149.9954554
f	100	100.9429469
δ	2.339539113	2.297394124
$g_1(x)$	-28.09283911	-49.99999477
$g_2(x)$	-21.90716089	-5.23E-06
$g_3(x)$	-33.64959994	-49.99996461
$g_4(x)$	-16.35040006	-3.54E-05
$g_5(x)$	-79.999.998	-79737.112
$g_6(x)$	-9.8E-11	-36.02117726
$g_7(x)$	-0.00001	-0.943046876

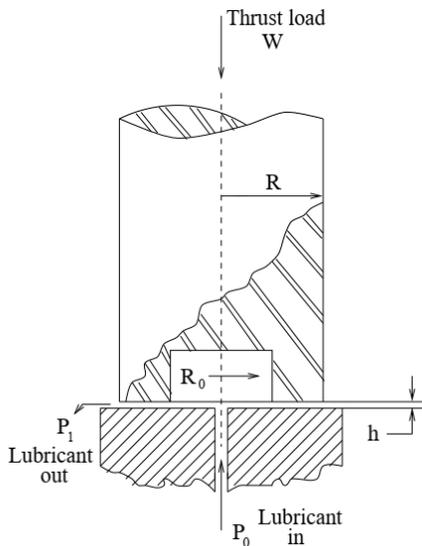


FIGURE 11. Visualization of the hydro-static thrust bearing problem.

is prepared while Rao et al. [14] have provided the related mathematical formulations.

Table 12 and Table 13 provide the best and statistical results of multiple optimization runs for the AOS and other approaches in dealing with the hydro-static thrust bearing design problem. The data demonstrate that the AOS can provide better results than the other metaheuristics while it yields improved statistical results in terms of mean of runs, worst run and standard deviation values.

G. FOUR-STAGE GEAR BOX

In this design example, the weight optimization of a gear box with four stage is considered which has 22 design variables for determining the positions of the gear and pinion, number of teeth and blank thickness with 88 design constraints. The complete mathematical formulation of this problem is

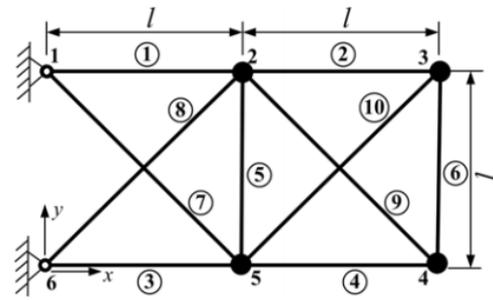


FIGURE 12. Visualization of the ten-bar truss example.

presented in [42]. In Table 14, the best results of the AOS algorithm considering multiple optimization runs are presented in which the design variable are also provided for clarification. The statistical results for the AOS and some other metaheuristics are also presented in Table 15 for comparative purposes. It can be concluded that the AOS algorithm provides competitive best and statistical results in dealing with the four-stage gear box as a complex engineering design problem.

H. TEN-BAR TRUSS

The weight optimization of a truss structure with ten structural elements is considered in this design example which has ten design variables for the cross-sectional areas of structural bars ($A_1, A_2, A_3, A_4, A_5, A_6, A_7, A_8, A_9, A_{10}$) with three inequality constraints. In Fig. 19, a schematic presentation of this constraint design problem is shown while Yu et al. [46] provide the related mathematical formulations.

In Table 16, the best results of multiple optimization runs for different metaheuristics including the AOS algorithm in dealing with the ten-bar truss design example are presented. Regarding the fact that this example is one of the well-known real-size design examples in the structural optimization field, there is a challenging competition in finding the optimum weight of this truss structure. By comparing the best results of AOS to the reported results of other alternatives, it is concluded that AOS provides outstanding optimum values. In addition, the statistical results of the AOS algorithm including the mean, worst and standard deviation of multiple optimization procedures are also provided in Table 17 for having a valid judgment.

I. ROLLING ELEMENT BEARING

In the rolling element bearing design example, the optimum tuning of the load-carrying capacity rolling element bearing system is considered in which a total number of five design variables including the ball diameter (D_b), inner raceway curvature coefficient (f_i), total number of balls (Z), pitch diameter (D_m), the outer raceway curvature coefficient (f_o) and the specific design parameters of the system ($K_{Dmin}, K_{Dmax}, \epsilon, e, \zeta$) with nine inequality design constraints are considered in the problem definition. In Fig. 13, a schematic presentation

TABLE 11. Statistical results for the robot gripper problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
(ABC) Rao et al. [14]	4.247644	5.086611	6.784631	0.07
(TLBO) Rao et al. [14]	4.247644	4.93770095	8.141973	0.56
Present Study (AOS)	2.54383687	2.791745357	3.143355667	0.226323642

ABC: Artificial Bee Colony
TLBO: Teaching-Learning Based Optimization

TABLE 12. Best results of different approaches for the hydro-static thrust bearing problem.

	Siddall [57]	Deb & Goyal [58]	Coello [59]	Rao et al. [14]	Present Study (AOS)
Best	2288:2268	2161.4215	1950.2860	1625.44276	1621.926212
R	7.155	6.778	6.271	5.9557805026	5.968100069
R ₀	6.689	6.234	12.901	5.3890130519	5.402028631
μ	8.321E-06	6.096 E-06	5.605E-06	0.0000053586	5.36E-06
Q	9.168	3.809	2.938	2.2696559728	2.267705635
g ₁ (x)	-11086.7430	-8329.7681	-2126.86734	-0.0001374735	-63.57841887
g ₂ (x)	-402.4493	-177.3527	-68.0396	-0.0000010103	-3.930479341
g ₃ (x)	-35.057196	-10.684543	-3.705191	-0.0000000210	-0.039093072
g ₄ (x)	-0.001542	-0.000652	-0.000559	-0.0003243625	-0.000324394
g ₅ (x)	-0.466000	-0.544000	-0.666000	-0.5667674507	-0.566071438
g ₆ (x)	-0.000144	-0.000717	-0.000805	-0.0009963614	-0.000996358
g ₇ (x)	-563.644401	-83.618221	-849.718683	-0.0000090762	-1.865244618

TABLE 13. Statistical results for the hydro-static thrust bearing problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
Rao et al. [14]	1625.44276	1797.70798	2096.8012	0.19
Present Study (AOS)	1621.926212	1752.413561	1831.449755	23.6285497

TABLE 14. Best results of different approaches for the four-stage gear box problem.

	Present Study (AOS)
Best	37.4042245
x ₁	18
x ₂	43
x ₃	19
x ₄	41
x ₅	18
x ₆	32
x ₇	19
x ₈	41
x ₉	1
x ₁₀	1
x ₁₁	1
x ₁₂	1
x ₁₃	2
x ₁₄	5
x ₁₅	3
x ₁₆	4
x ₁₇	5
x ₁₈	6
x ₁₉	4
x ₂₀	3
x ₂₁	4
x ₂₂	5

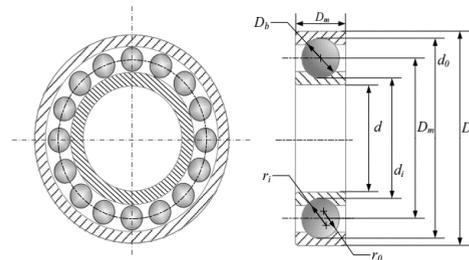


FIGURE 13. Visualization of the rolling element bearing problem.

In Table 18, the best results of the AOS and other meta-heuristic algorithms are presented for the rolling element bearing design example alongside the optimum design variables. The statistical results including the mean of runs, worst run and standard deviation of multiple optimization runs are also provided in Table 19 for competitive purposes. Based in the results, it is concluded that the AOS is capable of providing very competitive results among other approaches.

J. GAS TRANSMISSION COMPRESSOR

In this engineering design problem, the design optimization of a gas transmission compressor is considered which has four design variables with one inequality design constraint. The complete mathematical formulation of this problem is presented by Kumar et al. [42]. The best results of the

of this constraint design problem is shown while Gupta et al. [47] provide the related mathematical formulations.

TABLE 15. Statistical results for the four-stage gear box problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
(IUDE) Kumar et al. [42]	35.4	39.1	45.6	3.62
(MAES) Kumar et al. [42]	60.7	57.8	19.9	68.5
(LSHADE) Kumar et al. [42]	36.5	40.3	54.2	5.52
Present Study (AOS)	37.4042245	52.83708891	90.81422082	11.89354773

IUDE: Improved Unified Differential Evolution Algorithm
MAES: Matrix Adaptation Evolution Strategy
LSHADE: Linear Success-History based Adaptive Differential Evolution

TABLE 16. Best results of different approaches for the ten-bar truss example.

	Yu et al. [46]	Lamberti & Pappalettere [60]	Baghlani & Makiabadi [61]	Kaveh & Zolghadr [62]	Present Study (AOS)
Best	544.7	534.57	530.76	529.25	525.6788438
A ₁	36.380	35.148	35.494	39.569	34.8119633
A ₂	12.941	13.169	14.777	16.740	15.30794832
A ₃	35.764	37.69	36.203	34.361	34.78346867
A ₄	18.314	19.556	15.387	12.994	13.71838609
A ₅	3.002	1.087	0.6451	0.645	0.782401649
A ₆	5.433	4.844	4.5896	4.802	4.666928874
A ₇	20.989	18.314	23.211	26.182	25.61578707
A ₈	24.14	27.415	24.561	21.260	22.17289405
A ₉	9.753	12.562	12.482	11.766	11.71022039
A ₁₀	18.102	12.106	12.324	11.392	13.66557392

TABLE 17. Statistical results of the AOS algorithm for the ten-bar truss problem.

Approaches	Best	Mean	Worst	Std-Dev
Present Study (AOS)	525.6788438	534.4838193	590.8453285	8.652827447

TABLE 18. Best results of different approaches for the rolling element bearing example.

	(TLBO) Rao et al. [14]	(ABC) Yildiz et al. [56]	(GWO) Yildiz et al. [56]	(ALO) Yildiz et al. [56]	Present Study (AOS)
Best	81859.74	85428.2495	85529.0830	85546.6377	83918.49253
D _m	21.42559	125.6599	125.7090	125.718	125
D _b	125.7191	21.40862	21.42316	21.425242	21.875
Z	11	11	11	11	10.77700905
f _i	0.515	0.515	0.515	0.515	0.515
f ₀	0.515	0.515	0.529322	0.5157018	0.515
K _{Dmin}	0.424266	0.427166	0.420867	0.4541646	0.476110618
K _{Dmax}	0.633948	0.668849	0.633296	0.6464928	0.658142645
ε	0.3	0.3	0.300224	0.3000122	0.3
e	0.068858	0.071386	0.02	0.0638003	0.02
ζ	0.799498	0.6	0.619432	0.6107592	0.618242202

TLBO: Teaching-Learning Based Optimization
ABC: Artificial Bee Colony
GWO: Grey Wolf Optimizer
ALO: Ant Lion Optimizer

TABLE 19. Statistical results for the rolling element bearing problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
(TLBO) Rao et al. [14]	81859.74	81438.987	80807.8551	0.66
(ABC) Yildiz et al. [56]	85428.2495	85121.7544	83859.0851	362.57
(GWO) Yildiz et al. [56]	85529.0830	83395.0849	43543.4508	8224.5
(ALO) Yildiz et al. [56]	85546.6377	84032.8636	73872.8164	3121.8
Present Study (AOS)	83918.49253	82175.21266	83826.38337	23.38511

AOS algorithm in dealing with this problem are presented in Table 20 while the statistical results for different approaches

are also provided in Table 21 for comparative purposes. Since the results of other metaheuristics were not provided with

TABLE 20. Best results of different approaches for the gas transmission compressor problem.

	<i>Present Study (AOS)</i>
<i>Best</i>	2964895.417
x_1	50
x_2	1.178283953
x_3	24.59259097
x_4	0.388353075
$g(x)$	0

accurate digits, it can be concluded that the results of the AOS is somehow better than the results of other metaheuristics.

K. TENSION OR COMPRESSION SPRING-CASE 2

This problem is an extension of the tension or compression spring while the difference between this case and the standard version of this problem is in the objective functions and the design variables. In this case, the volume minimization of the required steel wire for a helical tension or compression spring is considered while three continuous, discrete and integer design variables (d, D, N) are considered for problem definition with a total number of eight inequality design constraints. The mathematical formulation and comprehensive description of this constraint example is provided by He *et al.* [48].

In Table 22, the best result of different approaches for the case 2 of tension or compression spring problem are provided in which the optimum values for the design variables and design constraints are also presented. It can be concluded that the AOS algorithm achieves better results than the other alternative algorithms. The statistical results of the AOS algorithm including the mean of runs, worst run and standard deviation of multiple optimization runs are also included in Table 23 for a comparison.

L. GEAR TRAIN

In this design problem, the optimization of a compound gear train is considered in which the overall ratio of the gears is to be minimized. There are four design variables for the number of teeth in the gears of the system (z_d, z_b, z_a, z_f) with only one inequality design constraint. In Fig. 14, a schematic presentation of this constraint design problem is shown while Zelinka and Lampinen [49] provide the related mathematical formulations.

In Table 24, the best results of the AOS and some other metaheuristic algorithms in dealing with the gear train design problem are presented alongside the optimum design variables. Since the main aim of this problem is to reach a lower ratio of the gears, the AOS is capable of providing the lowest possible minimum value for this ratio in the optimization process. In addition, the statistical results of different approaches are presented in Table 25 in which the superiority of the AOS algorithm in terms of mean of multiple runs, worst run and standard deviation results is seen.

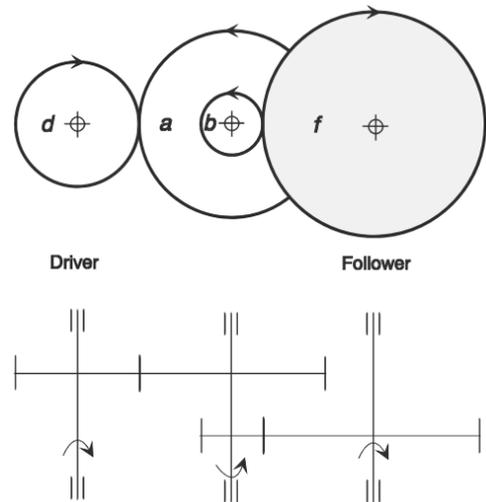


FIGURE 14. Visualization of the gear train problem.

M. HIMMELBLAU'S FUNCTION

Himmelblau's function is a well-known nonlinear benchmark constraint optimization problem which has been utilized as test function for performance evaluation of different novel and improved metaheuristic algorithms. This problem has five design variables with six inequality constraints while the complete mathematical presentation of this problem is provided by Himmelblau [50]. In Table 26, the best results of different metaheuristic algorithms are provided for evaluating her overall performance of the AOS algorithm in which the optimum design variables and design constraints are also included. It is seen that the AOS yields acceptable results in dealing with this problem. Statistical results of different optimization runs including the mean of results, worst run and standard deviation are also presented in Table 27 for comparison.

N. TOPOLOGY OPTIMIZATION

Herein, the material layout optimization of a simply supported structural element in dealing with a predefined set of loadings is considered. This problem has 30 design variables which considers the geometric configuration of the element with 30 inequality design constraints. In Fig. 15, a schematic presentation of the problem is shown while Sigmund [51] provides the related mathematical formulations.

In Table 28, the best result of the AOS algorithm is provided alongside the optimum design variables. Statistical results of different metaheuristic algorithms based on different optimization runs including the mean of results, worst run and standard deviation values are reported in Table 29. It is found that the AOS algorithm provides improved statistical results compared to other approaches.

TABLE 21. Statistical results for the gas transmission compressor problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
(IUDE) Kumar et al. [42]	2.96E+06	2.96E+06	2.96E+06	6.59E-10
(MAES) Kumar et al. [42]	2.96E+06	2.96E+06	2.96E+06	0.00E+00
(LSHADE) Kumar et al. [42]	2.96E+06	2.97E+06	2.97E+06	1.23E+03
Present Study (AOS)	2964895.417	2965102.327	2966483.832	251.8360974

IUDE: Improved Unified Differential Evolution Algorithm
MAES: Matrix Adaptation Evolution Strategy
LSHADE: Linear Success-History based Adaptive Differential Evolution

TABLE 22. Best results of different approaches for the tension or compression spring (Case 2).

	Lampinen & Zelinka [63]	Deb & Goyal [58]	Sandgren [64]	He et al. [48]	Present Study (AOS)
Best	2.65856	2.665	2.7995	2.65856	2.615360373
d	0.283	0.283	0.283	0.283	7.200436705
D	1.223041010	1.226	1.180701	1.223041010	1.364635836
N	9	9	10	9	0.2905583
$g_1(x)$	-1008.8114	-713.510	-54309	-1008.8114	-44.67223896
$g_2(x)$	-8.9456	-8.933	-8.8187	-8.9456	-9.407128275
$g_3(x)$	-0.083	-0.083	-0.08298	-0.083	-0.0905583
$g_4(x)$	-1.777	-1.491	-1.8193	-1.777	-1.635364164
$g_5(x)$	-1.3217	-1.337	-1.1723	-1.3217	-1.696599054
$g_6(x)$	-5.4643	-5.461	-5.4643	-5.4643	-5.464216405
$g_7(x)$	0	0	0	0	0
$g_8(x)$	0	-0.009	0	0	-0.000161721

TABLE 23. Statistical results of the AOS algorithm for the tension or compression spring (Case 2).

Approaches	Best	Mean	Worst	Std-Dev
Present Study (AOS)	2.615360373	2.64371161	2.863796184	0.042854835

TABLE 24. Best results of different approaches for the gear train problem.

	Gandomi et al. [44]	Loh & Papalambros [65]	Kannan & Kramer [66]	Sandgren [64]	Present Study (AOS)
Best	2.701E-12	2.7E-12	2.146E-08	5.712E-06	2.29E-19
z_d	19	19	13	18	16.17108014
z_b	16	16	15	22	14.24826982
z_a	43	43	33	45	39.40873922
z_f	49	49	41	60	40.52327337

TABLE 25. Statistical results for the gear train problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
Gandomi et al. [44]	2.7009E-12	1.9841E-9	2.3576E-9	3.5546E-9
Loh & Papalambros [65]	2.7E-12	2.7E-12	2.7E-12	2.2122E-28
(CPKH) Wang et al. [67]	2.22E-16	2.22E-16	8.5E-09	7.96E-22
(ABC) Wang et al. [67]	2.92E-15	3.18E-15	8.5E-09	9.81E-10
Present Study (AOS)	2.29E-19	6.25E-15	9.06E-14	1.26E-14

CPKH: Chaotic Particle Swarm Krill Herd
ABC: Artificial Bee Colony

O. STEEL I-SHAPED BEAM

In this design example, the minimization of vertical displacement in a simply-supported steel I-shaped beam is considered in which there are four design variables including the width of the flanges (b), height of the web (h), thickness of the web (t_w), and the thickness of the flanges (t_f) with two inequality design constraints. In Fig. 16, a schematic presentation of this constraint design problem is prepared

while Gandomi et al. [44] provide the related mathematical formulations.

The best results of different optimization algorithms including the AOS algorithm are presented in Table 30 while the optimum design variables are also included. In addition, statistical results of different optimization runs are also provide in Table 31 for having a valid comparative investigation. It is seen that the AOS yields improved

TABLE 26. Best results of different approaches for the Himmelblau's function.

	Runarsson & Yao [68]	Himmelblau [50]	Gen & Cheng [69]	He et al. [48]	Present Study (AOS)
<i>Best</i>	-30665.539	-30373.949	-30183.576	-30665.539	-30665.539
x_1	78	78.62	81.49	78	78
x_2	33	33.44	34.09	33	33
x_3	29.995256025682	31.07	31.24	29.995256025682	29.99525603
x_4	45	44.18	42.2	45	45
x_5	36.775812905788	35.22	34.37	36.775812905789	36.77581291
$g_1(x)$	-92	-91.7927	-91.7819	-92	-92
$g_2(x)$	-98.8405	-98.8929	-99.3188	-98.8405	-11.15949969
$g_3(x)$	-20	-20.1316	-20.0604	-20	-8.840500309

TABLE 27. Statistical results of AOS algorithm for the Himmelblau's function.

Approaches	Best	Mean	Worst	Std-Dev
Present Study (AOS)	-30665.539	-30638.19946	-30317.71871	66.71554068

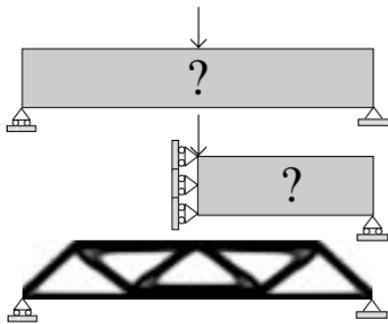


FIGURE 15. Visualization of the topology optimization problem.



FIGURE 16. Visualization of the steel I-shaped beam problem.

results in dealing with this kind of complex optimization problem.

P. PISTON LEVER

In his problem, the volume optimization of the required oil in the piston lever is considered to optimally tune the position of the piston. There are four design variables in this problem including the H , B , X and D which represent the position of the piston with only four inequality design constraints. In Fig. 17, a schematic presentation of this constraint design problem is prepared while Gandomi et al. [44] provide the related mathematical formulations.

In Table 32, the best results of AOS and other metaheuristic algorithms are presented while the statistical results including the mean of the results, worst run and standard deviation of multiple optimization runs are provided in Table 33.

TABLE 28. Best AOS result for the topology optimization problem.

	Present Study (AOS)
<i>Best</i>	2.639346497
x_1	1
x_2	1
x_3	1
x_4	1
x_5	1
x_6	1
x_7	1
x_8	1
x_9	1
x_{10}	1
x_{11}	1
x_{12}	1
x_{13}	1
x_{14}	1
x_{15}	1
x_{16}	1
x_{17}	1
x_{18}	1
x_{19}	1
x_{20}	1
x_{21}	1
x_{22}	1
x_{23}	1
x_{24}	1
x_{25}	1
x_{26}	1
x_{27}	1
x_{28}	1
x_{29}	1
x_{30}	1

By comparing the results, it is found that the AOS outranks the other approaches.

Q. CORRUGATED BULKHEAD

In this problem, the weight minimization of a corrugated bulkhead in tankers is considered. The problem has 4 design variables including the width (b), length (l), depth (h) and thickness (t) of the bulkhead with 6 inequality constraints. The problem is mathematically presented by Gandomi et al. [44]. Table 34 reports the best results of the

TABLE 29. Statistical results for the topology optimization problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
(IUDE) Kumar et al. [42]	2.64	2.64	2.64	4.44E-16
(MAES) Kumar et al. [42]	2.65	2.65	2.65	8.64E-03
(LSHADE) Kumar et al. [42]	2.64	2.64	2.64	1.03E-15
Present Study (AOS)	2.639346497	2.639346497	2.639346497	1.33227E-15

IUDE: Improved Unified Differential Evolution Algorithm
MAES: Matrix Adaptation Evolution Strategy
LSHADE: Linear Success-History based Adaptive Differential Evolution

TABLE 30. Best results of different approaches for the steel I-shaped beam problem.

	(ARSM) Wang [70]	(I-ARSM) Wang [70]	(MATLAB) Wang [70]	(CSA) Gandomi et al. [44]	Present Study (AOS)
Best	0.0157	0.131	0.0131	0.0130747	0.01307412
<i>h</i>	80	79.99	80	80	80
<i>b</i>	37.05	48.42	50	50	50
<i>t_w</i>	1.71	0.9	0.9	0.9	0.9
<i>t_f</i>	2.31	2.4	2.32	2.3216715	2.321792097

ARSM: Adaptive Response Surface Method
I-ARMS: Improved Adaptive Response Surface Method
MATLAB: Matrix Laboratory Optimization Approach
CSA: Cuckoo Search Algorithm

TABLE 31. Statistical results for the steel I-shaped beam problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
Gandomi et al. [44]	0.0130747	0.0132165	0.01353646	0.0001345
Present Study (AOS)	0.01307412	0.013178898	0.013814045	0.000155511

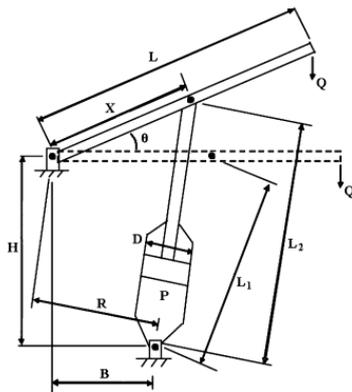


FIGURE 17. Visualization of the piston lever problem.

TABLE 32. Best results of different approaches for the piston lever problem.

	Gandomi et al. [44]	Present Study (AOS)
Best	8.4271	8.419142742
<i>H</i>	0.05	0.05
<i>B</i>	2.043	2.042112482
<i>X</i>	120	119.951727
<i>D</i>	4.0851	4.084004492

AOS and other metaheuristic algorithms including the optimum design variables while the statistical results are also

provided in Table 35 for comparative purposes. It is seen that AOS is competitive.

R. CANTILEVER BEAM

In this design example, the weight minimization of a cantilever beam with 5 stepped hollow square sections is considered. There are 5 design variables including the width of the beam in different cross sections (*x*₁, *x*₂, *x*₃, *x*₄ and *x*₅) with only one inequality design constraints. Gandomi et al. [44] provide the related mathematical formulations.

In Table 36, the best results of different metaheuristic alongside the results of AOS are presented for comparative purposes. The optimum design variables are also provided for clarity. By comparing the obtained results of the AOS to the results of other algorithms, it is concluded that the AOS provides improved results. For completeness, the AOS statistical results are presented in Table 37.

S. TUBULAR COLUMN

In this problem, the material and construction cost optimization of a tubular column is sought. There are three design variables including the average column section thickness (*t*) and average diameter of the column section (*d*) and six inequality design constraints. In Fig. 18, a schematic presentation of this problem is shown while Gandomi et al. [44] provide the related mathematical formulations.

TABLE 33. Statistical results for the piston lever problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
(HPSO) Gandomi et al. [44]	162	187	197	13.4
(GA) Gandomi et al. [44]	161	185	216	18.2
(DE) Gandomi et al. [44]	159	187	199	14.2
(CSA) Gandomi et al. [44]	8.4271	40.2319	168.5920	59.0552
Present Study (AOS)	8.419142742	33.7412759	60.66498628	93.46674724

HPSO: Hybrid Particle Swarm Optimization
 GA: Genetic Algorithm
 DE: Differential Evolution
 CSA: Cuckoo Search Algorithm

TABLE 34. Best results of different approaches for the corrugated bulkhead problem.

	Gandomi et al. [44]	Present Study (AOS)
Best	5.894331	6.84295801
<i>b</i>	37.1179498	57.69230769
<i>h</i>	33.0350210	34.14762035
<i>l</i>	37.1939476	57.69230769
<i>t</i>	0.7306255	1.05

TABLE 35. Statistical results for the corrugated bulkhead problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
Gandomi et al. [44]	5.894331	5.988257	6.126749	0.064360
Present Study (AOS)	6.84295801	7.060808377	7.066936186	0.000649111

TABLE 36. Best results of different approaches for the cantilever beam problem.

	(MMA) Gandomi et al. [44]	(GCA-I) Gandomi et al. [44]	(GCA-II) Gandomi et al. [44]	(CSA) Gandomi et al. [44]	Present Study (AOS)
Best	1.34	1.34	1.34	1.33999	1.339956366
x_1	6.01	6.01	6.01	6.0089	6.016165407
x_2	5.3	5.3	5.3	5.3049	5.308902645
x_3	4.49	4.49	4.49	4.5023	4.494577659
x_4	3.49	3.49	3.49	3.5077	3.501505539
x_5	2.15	2.15	2.15	2.1504	2.152508461

MMA: Method of Moving Asymptotes
 GCA: Generalized Convex Approximation
 CSA: Cuckoo Search Algorithm

TABLE 37. Statistical results for the cantilever beam problem considering AOS algorithm.

Approaches	Best	Mean	Worst	Std-Dev
Present Study (AOS)	1.339956366	1.351954573	1.491711377	0.02499743

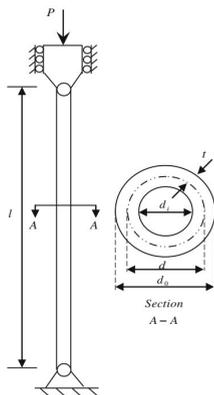


FIGURE 18. Visualization of the tubular column problem.

In Table 38, the best results of different metaheuristics including the AOS algorithm are presented for comparative

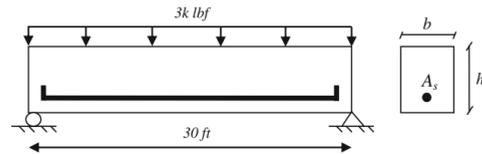


FIGURE 19. Visualization of the reinforced concrete beam.

purposes while the statistical results are also presented in Table 39 based on multiple optimization runs. It is found that the AOS performs better in this problem.

T. REINFORCED CONCRETE BEAM

Herein, the cost optimization of a reinforced concrete beam is sought. There are three design variables including the steel area (A_s), beam depth (h) and beam width (b) and

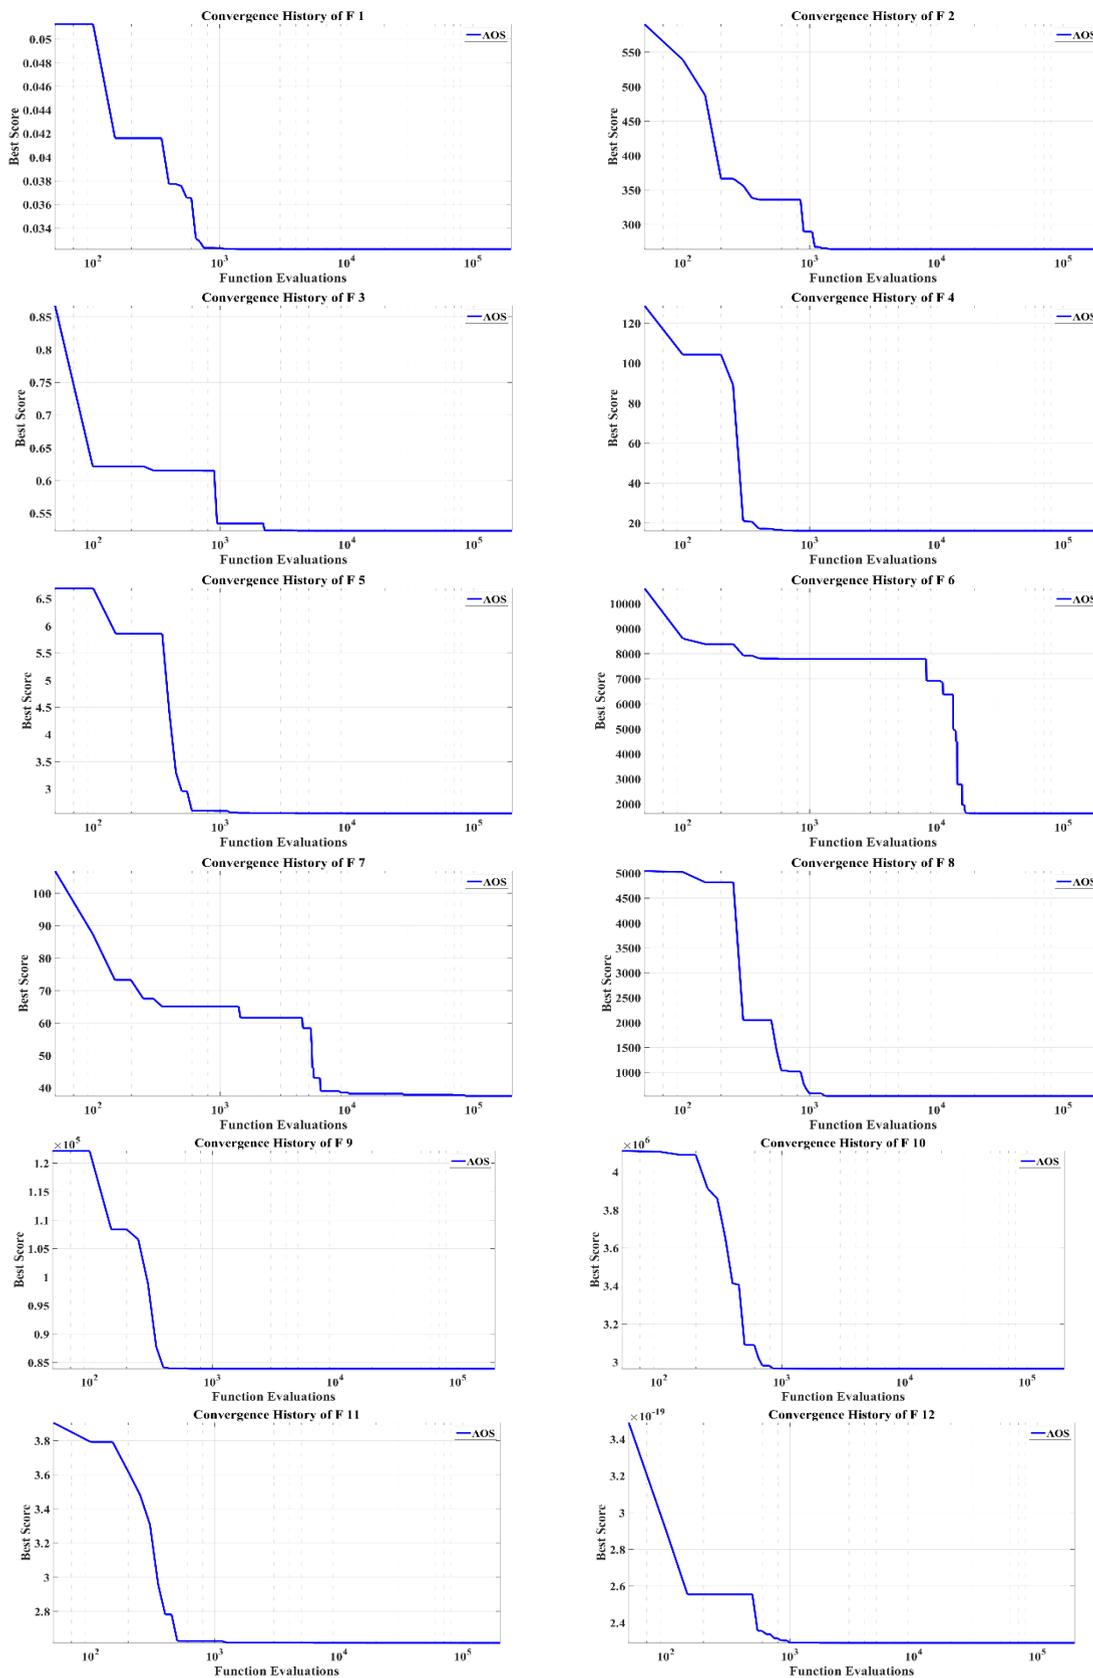


FIGURE 20. Convergence history of the AOS for different constraint problems.

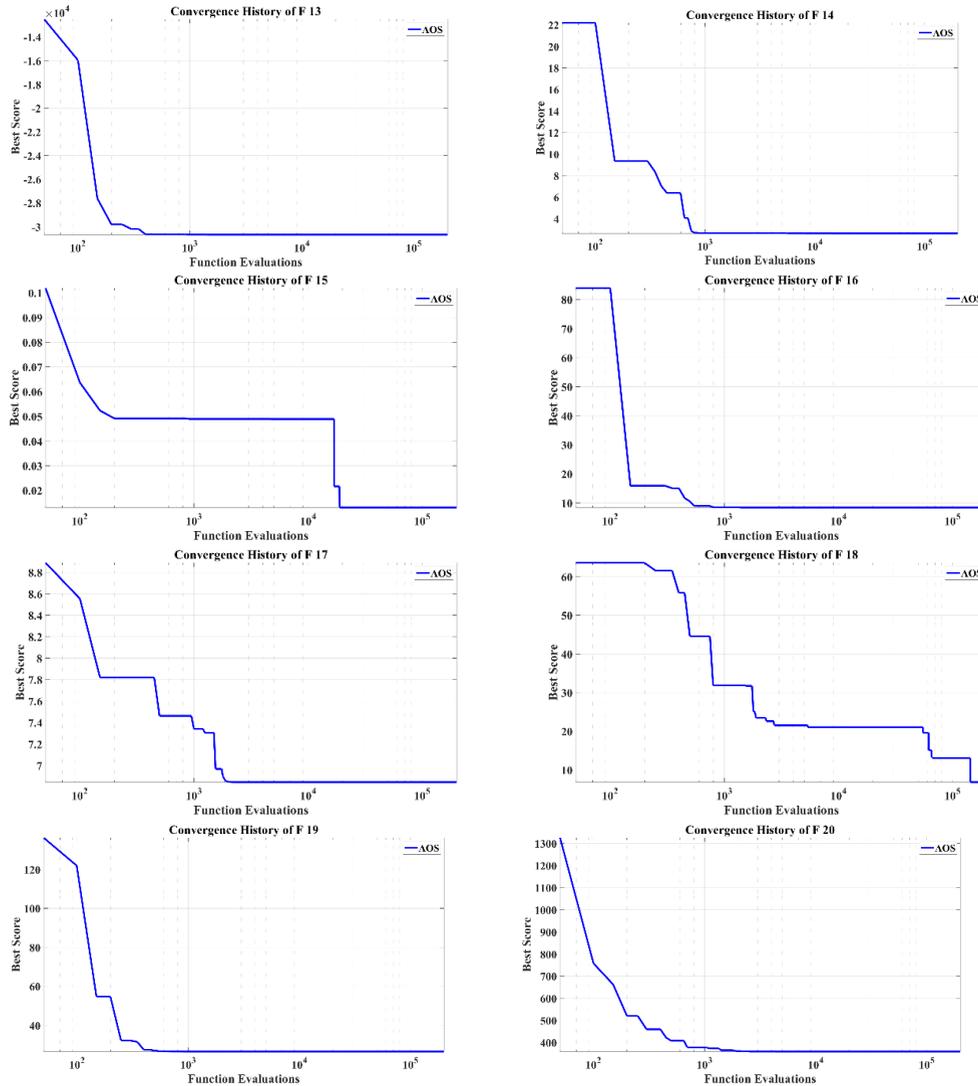


FIGURE 20. (Continued.) Convergence history of the AOS for different constraint problems.

TABLE 38. Best results of different approaches for the tubular column problem.

	Hsu & Liu [71]	Rao [45]	Gandomi et al. [44]	Present Study (AOS)
<i>Best</i>	25.5316	26.5323	26.53217	26.53137828
<i>d</i>	5.4507	5.44	5.45139	5.451152962
<i>t</i>	0.292	0.293	0.29196	0.291966716
$g_1(x)$	-7.8E-05	-0.8579	-0.0241	-3.64E-06
$g_2(x)$	0.1317 *	0.0026 *	-0.1095	-2.47E-06
$g_3(x)$	-0.6331	-0.8571	-0.6331	-0.633105141
$g_4(x)$	-0.6107	0	-0.6106	-0.610631931
$g_5(x)$	-0.3151	-0.75	-0.3150	-0.314990412
$g_6(x)$	-0.6350	0	-0.6351	-0.635041605

* Violated Sets

two inequality design constraints. In Fig. 19, a schematic presentation of the problem is shown while Gandomi et al. [44] provide the mathematical formulation.

In Table 40, the best results of different approaches including the AOS algorithm are presented. It is seen that the AOS provides better results than other algorithms. For completeness, statistical AOS results from different optimization runs are presented in Table 41.

V. CONVERGENCE HISTORY

In this section, the convergence behavior of the AOS algorithm in dealing with the considered constraint optimization problems is presented to demonstrate the convergence trends of the AOS to the optimum values of the objective functions in each of the considered problems. In Fig. 20, these convergence curves are illustrated in which the best results of 25 independent runs are determined for the considered problems.

TABLE 39. Statistical results for the tubular column problem considering different approaches.

Approaches	Best	Mean	Worst	Std-Dev
Gandomi et al. [44]	26.53217	26.53217	26.53972	0.00193
Present Study (AOS)	26.53137828	26.53161399	26.60821361	0.001030078

TABLE 40. Best results of different approaches for the reinforced concrete beam problem.

	Amir & Hasegawa [72]	Shih & Yang [73]	Yun [74]	Gandomi et al. [44]	Present Study (AOS)
Best	374.2	362.00648	364.8541	359.2080	359.20800
As	7.8	6.32	6.16	6.32	6.32
b	31	34	35	34	34
h	7.79	8.637180	8.7	8.5	8.5
$g_1(x)$	-4.2012	-0.7745	-3.6173	-0.2241	-0.224094986
$g_2(x)$	-0.0205	-0.0635	0	0	-1.00E-07

TABLE 41. Statistical results for the reinforced concrete beam problem considering AOS algorithm.

Approaches	Best	Mean	Worst	Std-Dev
Present Study (AOS)	359.20800	359.3306872	362.2535612	0.59614901

VI. CONCLUSION

Optimum design of engineering problems has been addressed in this paper by means of the Atomic Orbital Search (AOS). The inspirational concept of this algorithm stems from the quantum-based atomic model relying on principles of quantum mechanics. For numerical investigation, 20 well-known constrained design problems in different engineering fields have been considered corresponding to real-life optimization benchmark design problems. By evaluating the results of the AOS algorithm in dealing with the considered engineering design problems, it was found that AOS has better performance in most cases as evidenced by comparing to the results of other metaheuristic algorithms from the recent literature. The maximum difference between the best optimum values of the AOS and other approaches are about 40% for robot gripper problem. In addition, the results of the AOS algorithm in dealing with three of the considered design examples including the four-stage gear box problem, rolling element bearing and the corrugated bulkhead are very competitive regarding the results of other approaches. The herein reported results renders the AOS a promising approach to tackle large-scale complex engineering optimization problems such as optimization-driven design of building structures under gravitational, wind, and seismic loads [22], [25], [30], [75], [76]. Such applications are left for future work.

REFERENCES

- [1] J. H. Holland, *Adaptation in Natural and Artificial Systems: An Introductory Analysis With Applications to Biology, Control, and Artificial Intelligence*. Cambridge, MA, USA: MIT Press, 1992.
- [2] M. Dorigo, V. Maniezzo, and A. Colomi, "Ant system: Optimization by a colony of cooperating agents," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 26, no. 1, pp. 29–41, Feb. 1996.
- [3] R. Eberhart and J. Kennedy, "A new optimizer using particle swarm theory," in *Proc. 6th Int. Symp. Micro Mach. Hum. Sci. (MHS)*, Oct. 1995, pp. 39–43.
- [4] E. Atashpaz-Gargari and C. Lucas, "Imperialist competitive algorithm: An algorithm for optimization inspired by imperialistic competition," in *Proc. IEEE Congr. Evol. Comput.*, Sep. 2007, pp. 4661–4667.
- [5] X.-S. Yang, *Nature-Inspired Metaheuristic Algorithms*. U.K.: Luniver Press, 2010.
- [6] S. Mirjalili and A. Lewis, "The whale optimization algorithm," *Adv. Eng. Softw.*, vol. 95, pp. 51–67, May 2016.
- [7] M.-Y. Cheng and D. Prayogo, "Symbiotic organisms search: A new metaheuristic optimization algorithm," *Comput. Struct.*, vol. 139, pp. 98–112, Jul. 2014.
- [8] A. Kaveh and M. Khayatazad, "A new meta-heuristic method: Ray optimization," *Comput. Struct.*, vol. 112, pp. 283–294, Dec. 2012.
- [9] X. S. Yang, "Flower pollination algorithm for global optimization," in *Proc. Int. Conf. Unconventional Comput. Natural Comput.* Berlin, Germany: Springer, 2012, pp. 240–249.
- [10] G.-G. Wang, S. Deb, and L. D. S. Coelho, "Earthworm optimisation algorithm: A bio-inspired metaheuristic algorithm for global optimisation problems," *Int. J. Bio-Inspired Comput.*, vol. 12, no. 1, pp. 1–22, 2018.
- [11] S. Talatahari, M. Azizi, M. Tolouei, B. Talatahari, and P. Sareh, "Crystal structure algorithm (CryStAl): A metaheuristic optimization method," *IEEE Access*, vol. 9, pp. 71244–71261, 2021.
- [12] S. Talatahari, M. Azizi, and A. H. Gandomi, "Material generation algorithm: A novel metaheuristic algorithm for optimization of engineering problems," *Processes*, vol. 9, no. 5, p. 859, May 2021.
- [13] V. K. Patel and V. J. Savsani, "Heat transfer search (HTS): A novel optimization algorithm," *Inf. Sci.*, vol. 324, pp. 217–246, Dec. 2015.
- [14] R. V. Rao, V. J. Savsani, and D. P. Vakharia, "Teaching–learning-based optimization: A novel method for constrained mechanical design optimization problems," *Comput.-Aided Des.*, vol. 43, no. 3, pp. 303–315, 2011.
- [15] P. Savsani and V. Savsani, "Passing vehicle search (PVS): A novel metaheuristic algorithm," *Appl. Math. Model.*, vol. 40, nos. 5–6, pp. 3951–3978, Mar. 2016.
- [16] Y. Zhang and Z. Jin, "Group teaching optimization algorithm: A novel metaheuristic method for solving global optimization problems," *Expert Syst. Appl.*, vol. 148, Jun. 2020, Art. no. 113246.
- [17] L. Abualigah, D. Yousefi, M. A. Elaziz, A. A. Ewees, M. A. A. Al-Qaness, and A. H. Gandomi, "Aquila optimizer: A novel meta-heuristic optimization algorithm," *Comput. Ind. Eng.*, vol. 157, Jul. 2021, Art. no. 107250.
- [18] M. Braik, A. Sheta, and H. Al-Hiary, "A novel meta-heuristic search algorithm for solving optimization problems: Capuchin search algorithm," *Neural Comput. Appl.*, vol. 33, no. 7, pp. 2515–2547, Apr. 2021.
- [19] F. A. Hashim, K. Hussain, E. H. Houssein, M. S. Mabrouk, and W. Al-Atabany, "Archimedes optimization algorithm: A new metaheuristic algorithm for solving optimization problems," *Appl. Intell.*, vol. 51, no. 3, pp. 1531–1551, 2020.

- [20] S. Talatahari and M. Azizi, "Chaos game optimization: A novel metaheuristic algorithm," *Artif. Intell. Rev.*, vol. 54, no. 2, pp. 917–1004, 2021, doi: [10.1007/s10462-020-09867-w](https://doi.org/10.1007/s10462-020-09867-w).
- [21] S. Talatahari and M. Azizi, "Optimization of constrained mathematical and engineering design problems using chaos game optimization," *Comput. Ind. Eng.*, vol. 145, Jul. 2020, Art. no. 106560, doi: [10.1016/j.cie.2020.106560](https://doi.org/10.1016/j.cie.2020.106560).
- [22] S. Talatahari and M. Azizi, "Optimal design of real-size building structures using quantum-behaved developed swarm optimizer," *Struct. Des. Tall Special Buildings*, vol. 29, no. 11, Aug. 2020, Art. no. e1747, doi: [10.1002/tal.1747](https://doi.org/10.1002/tal.1747).
- [23] S. Talatahari, P. Motamedi, B. F. Azar, and M. Azizi, "Tribe-charged system search for parameter configuration of nonlinear systems with large search domains," *Eng. Optim.*, vol. 51, no. 1, pp. 18–31, 2021, doi: [10.1080/0305215X.2019.1696786](https://doi.org/10.1080/0305215X.2019.1696786).
- [24] M. Azizi, R. G. Ejlali, S. A. M. Ghasemi, and S. Talatahari, "Upgraded whale optimization algorithm for fuzzy logic based vibration control of nonlinear steel structure," *Eng. Struct.*, vol. 192, pp. 53–70, Aug. 2019, doi: [10.1016/j.engstruct.2019.05.007](https://doi.org/10.1016/j.engstruct.2019.05.007).
- [25] S. Talatahari and M. Azizi, "Optimum design of building structures using tribe-interior search algorithm," in *Structures*, vol. 28. Amsterdam, The Netherlands: Elsevier, 2020, pp. 1616–1633, doi: [10.1016/j.istruc.2020.09.075](https://doi.org/10.1016/j.istruc.2020.09.075).
- [26] S. Talatahari and M. Azizi, "Tribe-charged system search for global optimization," *Appl. Math. Model.*, vol. 93, pp. 115–133, May 2021.
- [27] S. Talatahari and M. Azizi, "Optimal parameter identification of fuzzy controllers in nonlinear buildings based on seismic hazard analysis using tribe-charged system search," in *Advances in Structural Engineering—Optimization*. Cham, Switzerland: Springer, 2020, pp. 99–132.
- [28] S. Talatahari and M. Azizi, "An extensive review of charged system search algorithm for engineering optimization applications," in *Nature-Inspired Metaheuristic Algorithms for Engineering Optimization Applications*. Singapore: Springer, 2021, p. 309, doi: [10.1007/978-981-33-6773-9_14](https://doi.org/10.1007/978-981-33-6773-9_14).
- [29] M. Azizi, "Designing fuzzy controllers for frame structures based on ground motion prediction using grasshopper optimization algorithm: A case study of Tabriz, Iran," in *Nature-Inspired Metaheuristic Algorithms for Engineering Optimization Applications*. Singapore: Springer, 2021, p. 153, doi: [10.1007/978-981-33-6773-9_8](https://doi.org/10.1007/978-981-33-6773-9_8).
- [30] S. Talatahari, S. Jalili, and M. Azizi, "Optimum design of steel building structures using migration-based vibrating particles system," in *Structure*, vol. 33. Amsterdam, The Netherlands: Elsevier, Oct. 2021, pp. 1394–1413.
- [31] S. Talatahari, M. Azizi, and M. Toloo, "Fuzzy adaptive charged system search for global optimization," *Appl. Soft Comput.*, vol. 109, Sep. 2021, Art. no. 107518.
- [32] M. Azizi, S. A. M. Ghasemi, R. G. Ejlali, and S. Talatahari, "Optimum design of fuzzy controller using hybrid ant lion optimizer and Jaya algorithm," *Artif. Intell. Rev.*, vol. 53, no. 3, pp. 1553–1584, Mar. 2020.
- [33] M. Azizi, S. A. M. Ghasemi, R. G. Ejlali, and S. Talatahari, "Optimization of fuzzy controller for nonlinear buildings with improved charged system search," *Struct. Eng. Mech.*, vol. 76, no. 6, p. 781, 2020.
- [34] M. Azizi, S. A. M. Ghasemi, R. G. Ejlali, and S. Talatahari, "Optimal tuning of fuzzy parameters for structural motion control using multiverse optimizer," *Struct. Des. Tall Special Buildings*, vol. 28, no. 13, Sep. 2019, Art. no. e1652.
- [35] M. A. Tawhid and V. Savsani, "ε-constraint heat transfer search (ε-HTS) algorithm for solving multi-objective engineering design problems," *J. Comput. Des. Eng.*, vol. 5, no. 1, pp. 104–119, Jan. 2018.
- [36] J. Patel, V. Savsani, V. Patel, and R. Patel, "Layout optimization of a wind farm to maximize the power output using enhanced teaching learning based optimization technique," *J. Cleaner Prod.*, vol. 158, pp. 81–94, Aug. 2017.
- [37] Y. Zhang, Z. Jin, and Y. Chen, "Hybrid teaching-learning-based optimization and neural network algorithm for engineering design optimization problems," *Knowl.-Based Syst.*, vol. 187, Jan. 2020, Art. no. 104836.
- [38] D. Ustun, S. Carbas, and A. Toktas, "A symbiotic organisms search algorithm-based design optimization of constrained multi-objective engineering design problems," *Eng. Comput.*, vol. 38, no. 2, pp. 632–658, Feb. 2021.
- [39] N. Panagant, N. Pholdee, S. Bureerat, A. R. Yıldız, and S. M. Sait, "Seagull optimization algorithm for solving real-world design optimization problems," *Mater. Test.*, vol. 62, no. 6, pp. 640–644, 2020.
- [40] V. Hayyolalam and A. A. P. Kazem, "Black widow optimization algorithm: A novel meta-heuristic approach for solving engineering optimization problems," *Eng. Appl. Artif. Intell.*, vol. 87, Jan. 2020, Art. no. 103249.
- [41] M. Azizi, "Atomic orbital search: A novel metaheuristic algorithm," *Appl. Math. Model.*, vol. 93, pp. 657–683, May 2021.
- [42] A. Kumar, G. Wu, M. Z. Ali, R. Mallipeddi, P. N. Suganthan, and S. Das, "A test-suite of non-convex constrained optimization problems from the real-world and some baseline results," *Swarm Evol. Comput.*, vol. 56, Aug. 2020, Art. no. 100693.
- [43] N. Andrei, *Nonlinear Optimization Applications Using the GAMS Technology*. New York, NY, USA: Springer, 2013, pp. 178–181.
- [44] A. H. Gandomi, X.-S. Yang, and A. H. Alavi, "Cuckoo search algorithm: A metaheuristic approach to solve structural optimization problems," *Eng. Comput.*, vol. 29, no. 1, pp. 17–35, Jan. 2013.
- [45] S. S. Rao, *Engineering Optimization: Theory and Practice*. Hoboken, NJ, USA: Wiley, 2019.
- [46] Z. Yu, T. Xu, P. Cheng, W. Zuo, X. Liu, and T. Yoshino, "Optimal design of truss structures with frequency constraints using interior point trust region method," *Proc. Romanian Acad. A, Math. Phys. Tech. Sci. Inf. Sci.*, vol. 15, no. 2, pp. 165–173, 2014.
- [47] S. Gupta, R. Tiwari, and S. B. Nair, "Multi-objective design optimisation of rolling bearings using genetic algorithms," *Mech. Mach. Theory*, vol. 42, no. 10, pp. 1418–1443, Oct. 2007.
- [48] S. He, E. Prempan, and Q. H. Wu, "An improved particle swarm optimizer for mechanical design optimization problems," *Eng. Optim.*, vol. 36, no. 5, pp. 585–605, 2004.
- [49] I. Zelinka and J. Lampinen, "Mechanical engineering problem optimization by SOMA," in *New Optimization Techniques in Engineering*. Berlin, Germany: Springer, 2004, pp. 633–653.
- [50] D. M. Himmelblau, *Applied Nonlinear Programming*. New York, NY, USA: McGraw-Hill, 1972.
- [51] O. Sigmund, "A 99 line topology optimization code written in MATLAB," *Struct. Multidisciplinary Optim.*, vol. 21, no. 2, pp. 120–127, 2001.
- [52] T. Ray and K. M. Liew, "Society and civilization: An optimization algorithm based on the simulation of social behavior," *IEEE Trans. Evol. Comput.*, vol. 7, no. 4, pp. 386–396, Aug. 2003.
- [53] J. Zhang, M. Xiao, L. Gao, and Q. Pan, "Queueing search algorithm: A novel metaheuristic algorithm for solving engineering optimization problems," *Appl. Math. Model.*, vol. 63, pp. 464–490, Nov. 2018.
- [54] H. Garg, "A hybrid GSA-GA algorithm for constrained optimization problems," *Inf. Sci.*, vol. 478, pp. 499–523, Apr. 2019.
- [55] R. V. Rao and V. J. Savsani, *Mechanical Design Optimization Using Advanced Optimization Techniques*. London, U.K.: Springer, 2012.
- [56] A. R. Yildiz, H. Abderazek, and S. Mirjalili, "Correction to: A comparative study of recent non-traditional methods for mechanical design optimization," *Arch. Comput. Methods Eng.*, vol. 28, no. 1, p. 265, Jan. 2021, doi: [10.1007/s11831-019-09346-8](https://doi.org/10.1007/s11831-019-09346-8).
- [57] J. N. Siddall, *Optimal Engineering Design: Principles and Applications*. Hamilton, ON, Canada: CRC Press, 1982.
- [58] K. Deb and M. Goyal, "Optimizing engineering designs using a combined genetic search," in *Proc. 7th Int. Conf. Genetic Algorithms*, 1997, pp. 512–528.
- [59] C. A. Coello, "The use of a multiobjective optimization technique to handle constraints," in *Proc. 2nd Int. Symp. Artif. Intell., Adapt. Syst.* Habana, Cuba: Institute of Cybernetics, Mathematics and Physics, 1999, pp. 251–256.
- [60] L. Lamberti and C. Pappalettere, "Move limits definition in structural optimization with sequential linear programming. Part I: Optimization algorithm," *Comput. Struct.*, vol. 81, no. 4, pp. 197–213, 2003.
- [61] A. Baghlani and M. H. Makiabadi, "Teaching-learning-based optimization algorithm for shape and size optimization of truss structures with dynamic frequency constraints," *Iranian J. Sci. Technol., Trans. Civil Eng.*, vol. 37, p. 409, Dec. 2013.
- [62] A. Kaveh and A. Zolghadr, "Shape and size optimization of truss structures with frequency constraints using enhanced charged system search algorithm," *Asian J. Civil Eng., Building Housing*, vol. 12, no. 4, pp. 487–509, 2011.
- [63] J. Lampinen and I. Zelinka, "Mixed integer-discrete-continuous optimization by differential evolution," in *Proc. 5th Int. Conf. Soft Comput.*, 1999, pp. 71–76.
- [64] E. Sandgren, "Nonlinear integer and discrete programming in mechanical design optimization," *J. Mech. Des.*, vol. 112, no. 2, pp. 223–229, 1990.
- [65] H. T. Loh and P. Y. Papalambros, "Computational implementation and tests of a sequential linearization algorithm for mixed-discrete nonlinear design optimization," *J. Mech. Des.*, vol. 113, no. 3, pp. 335–345, Sep. 1991.

- [66] B. K. Kannan and S. N. Kramer, "An augmented Lagrange multiplier based method for mixed integer discrete continuous optimization and its applications to mechanical design," *J. Mech. Des.*, vol. 116, no. 2, pp. 405–411, Jun. 1994.
- [67] G.-G. Wang, A. H. Gandomi, and A. H. Alavi, "A chaotic particle-swarm krill herd algorithm for global numerical optimization," *Kybernetes*, vol. 42, no. 6, pp. 962–978, Jun. 2013.
- [68] T. P. Runarsson and X. Yao, "Stochastic ranking for constrained evolutionary optimization," *IEEE Trans. Evol. Comput.*, vol. 4, no. 3, pp. 284–294, Sep. 2000.
- [69] M. Gen and R. Cheng, *Genetic Algorithms and Engineering Design*. Hoboken, NJ, USA: Wiley, 1997.
- [70] G. G. Wang, "Adaptive response surface method using inherited Latin hypercube design points," *J. Mech. Des.*, vol. 125, no. 2, pp. 210–220, Jun. 2003.
- [71] Y.-L. Hsu and T.-C. Liu, "Developing a fuzzy proportional–derivative controller optimization engine for engineering design optimization problems," *Eng. Optim.*, vol. 39, no. 6, pp. 679–700, Sep. 2007.
- [72] H. M. Amir and T. Hasegawa, "Nonlinear mixed-discrete structural optimization," *J. Struct. Eng.*, vol. 115, no. 3, pp. 626–646, Mar. 1989.
- [73] C. J. Shih and Y. C. Yang, "Generalized hopfield network based structural optimization using sequential unconstrained minimization technique with additional penalty strategy," *Adv. Eng. Softw.*, vol. 33, nos. 7–10, pp. 721–729, Jul. 2002.
- [74] Y. Yun, "Study on adaptive hybrid genetic algorithm and its applications to engineering design problems," M.S. thesis, Waseda Univ., Tokyo, Japan, 2005.
- [75] A. A. Taflanidis, A. Giaralis, and D. Patsialis, "Multi-objective optimal design of inerter-based vibration absorbers for earthquake protection of multi-storey building structures," *J. Franklin Inst.*, vol. 356, no. 14, pp. 7754–7784, Sep. 2019.
- [76] F. Petrini, A. Giaralis, and Z. Wang, "Optimal tuned mass-damper-inerter (TMDI) design in wind-excited tall buildings for occupants' comfort serviceability performance and energy harvesting," *Eng. Struct.*, vol. 204, Feb. 2020, Art. no. 109904, doi: 10.1016/j.engstruct.2019.109904.



SIAMAK TALATAHARI received the Ph.D. degree in structural engineering. He joined the University of Tabriz (one of the top ten universities in Iran), where he is currently an Associate Professor. His main research interests include data science (DS), machine learning (ML), and artificial intelligence (AI) and their application on engineering. Thanks to introduce, improve, hybridize, and apply DS/AI/ML methods for engineering problems, he published over 120 refereed international journal papers, three edited books in Elsevier, and eight chapters in international books. The citation of his works is over 8500. He has studied both how present novel efficient DS/AI/ML methods and how adaptive/improve the present methods to solve difficult problems. As instance, he presented Charged System Search (2010), Firefly Algorithm with Chaos (2013), Developed Swarm Optimizer (2016), Chaos Game Optimization (2020), Stochastic Paint Optimizer (2020), Crystal Structure Algorithm (2021), Material Generation Algorithm (MGA) as some new meta-heuristic algorithms. Multi Expression Programming (2014), Gene Expression Data Classification (2015), and Linear Biogeography-based Programming (2018) are some other DS-based methods that are developed and applied by Dr. Talatahari for solving engineering problems. He is honored by many academic awards; he is recognized as "Top One Percent Scientist of the World" in the field of "Engineering" and "Computer Sciences" for several years and as "One of the 70 Most Influential Professors in The History of the Tabriz University." He was also recognized as "Distinguished Scientist of Iranian Forefront of Sciences," "Most Prominent Young Engineering Scientist," "Distinguished Researcher," "Top Young Researcher," "Most Acclaimed Professor," and "Top Researcher and Teacher." In addition, he has been selected to receive the "TWAS Young Affiliateship" from the Central & South Asia Region and "Elite Awards" from Iranian Elites Organization. He served as a lead or guest editor for some special issue on different journals.



AGATHOKLIS GIARALIS received the M.Eng. (Greek Diploma) (five year) degree in structural engineering and the M.Sc. degree in earthquake resistant design of structures from the Department of Civil Engineering, Aristotle University of Thessaloniki, Greece, and the Ph.D. degree in civil engineering from Rice University, Houston, TX, USA, partly funded by the Fulbright Exchange Scholarship. He is currently a Senior Lecturer in structural engineering with the Department of Civil Engineering, City, University of London, where he serves as the Director of the Research Centre for Civil Engineering Structures, leading the Smart Structures and Structural Health Monitoring Research Unit. He has coauthored more than 100 articles in peer-reviewed international journals and conference proceedings. His research interests include the areas of nonlinear stochastic dynamics, structural vibrations control, vibrations-based structural health monitoring, and earthquake engineering. Recent contributions include innovative lightweight structural vibration control device configurations enabling dynamic energy harvesting, optimal performance-based design methodologies for slender buildings equipped with motion control devices under wind and earthquakes excitations, as well as compressive data acquisition and processing techniques supporting low-power wireless sensors for health monitoring and assessment of civil engineering structures. He is a Chartered Civil Engineer, a member of the American Society of Civil Engineers (ASCE), and a fellow of the Higher Education Academy in U.K.

• • •



MAHDI AZIZI received the Ph.D. degree in structural engineering from the University of Tabriz. He completed postdoctoral fellowship training in structural optimization with the University of Tabriz. He has published many research articles in the fields of structural optimization, metaheuristic algorithms, and structural vibration control, where his main purpose has been developing and hybridizing metaheuristic algorithms for different applications. He has recently proposed some novel metaheuristic algorithms for optimization purposes. He teaches some basic and advanced courses of structural engineering in different universities.