



# City Research Online

## City St George's, University of London

**Citation:** Mergos, P.E. (2018). Seismic design of reinforced concrete frames for minimum embodied CO2 emissions. *Energy and Buildings*, 162, pp. 177-186. doi: 10.1016/j.enbuild.2017.12.039

This is the accepted version of the paper.

This version of the publication may differ from the final published version. To cite this item please consult the publisher's version.

**Permanent repository link:** <https://openaccess.city.ac.uk/id/eprint/18725/>

**Link to published version:** <https://doi.org/10.1016/j.enbuild.2017.12.039>

**Copyright and Reuse:** Copyright and Moral Rights remain with the author(s) and/or copyright holders. Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge, unless otherwise indicated, provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way. For full details of reuse please refer to [City Research Online policy](#).

# Seismic design of reinforced concrete frames for minimum embodied CO<sub>2</sub> emissions

Panagiotis E. Mergos\*

*Research Centre for Civil Engineering Structures, Department of Civil Engineering, City,  
University of London, London EC1V 0HB, United Kingdom*

## **Abstract.**

Optimum structural design of reinforced concrete (RC) frames has been the focus of extensive research. Typically, previous studies set economic cost as the main design objective despite the fact that RC structures are major contributors of CO<sub>2</sub> emissions. The limited number of studies examining optimum design of RC frames for minimum CO<sub>2</sub> emissions do not address seismic design considerations. However, in many countries around the world, including most of the top-10 countries in CO<sub>2</sub> emissions from cement production, RC structures must be designed against earthquake threat. To bridge this gap, the present study develops optimum seismic designs of RC frames for minimum cradle to gate embodied CO<sub>2</sub> emissions and compares them with optimum designs based on construction cost. The aim is to identify efficient design practices that minimize the environmental impact of earthquake-resistant RC frames and examine the trade-offs between their cost and CO<sub>2</sub> footprint. To serve this goal, an RC frame is optimally designed according to all ductility classes of Eurocode 8 and for various design peak ground accelerations (PGAs), concrete classes and materials embodied CO<sub>2</sub> footprint scenarios. It is found that the minimum feasible CO<sub>2</sub> emissions of RC frames strongly depend on the adopted ductility class in regions of high seismicity, where low ductility seismic design can generate up to 60% more CO<sub>2</sub> emissions than designs for medium and high ductility. The differences reduce, however, as the level of seismicity decreases. Furthermore, CO<sub>2</sub> emissions increase significantly with the design PGA. On the other hand, they are less sensitive to the applied concrete class. It is also concluded that, for medium to high values of the ratio of the unit environmental impact of reinforcing steel to the respective impact of concrete, the minimum CO<sub>2</sub> seismic designs are very closely related to the minimum cost designs. However, for low values of the same ratio, the minimum cost design solutions can generate up to 13% more emissions than the minimum CO<sub>2</sub> designs.

**Keywords:** Seismic design; Eurocode 8; environment; embodied; CO<sub>2</sub> emissions; optimization; reinforced concrete; genetic algorithms

---

\* Corresponding author. Panagiotis E. Mergos, Lecturer in Structural Engineering, Research Centre for Civil Engineering Structures, City, University of London, London, EC1V 0HB, UK.

E-mail address: [panagiotis.mergos.1@city.ac.uk](mailto:panagiotis.mergos.1@city.ac.uk), Tel. 0044 (0) 207040 8417

## 1 Introduction

Natural hazards (e.g. earthquakes, floods, windstorms) and climate change are threatening sustainable development in the 21<sup>st</sup> century [1]. Reinforced concrete (RC) structures play a vital role in protecting human societies from natural disasters. On the other hand, they contribute significantly to greenhouse gas emissions that have been the dominant cause of the observed climate change. This is mainly due to the embodied environmental impact of cement, which is responsible for roughly 8% of global CO<sub>2</sub> emissions [2], and reinforcing steel. The previous observations underline the need for optimum structural design of RC structures that minimises their environmental impact as well as vulnerability to natural hazards.

In standard engineering practice, optimum structural design is pursued either with the aid of the designer's experience or a manual trial-and-error process. However, for complex problems, these approaches are often inadequate and automated structural optimization methodologies are required. Early automated optimization efforts of RC structures focussed on construction cost [3]. It was not until rather recently that research studies examined design of RC structures for minimum environmental impact. Paya *et al.* [4] developed multi-objective optimum designs of RC frames where, among others, construction cost and environmental impact were set as conflicting design objectives. The environmental impact was expressed in terms of the Eco-indicator 99 [5]. It is reported that 5% increase in the minimum construction cost can lead to 24% reduction in the environmental impact. In a later study, Paya *et al.* [6] examined optimum designs of RC frames for minimum material cost and embodied CO<sub>2</sub> emissions. They found that these two design objectives are strongly related. The minimum CO<sub>2</sub> designs are only 3% more expensive and produce 4% less CO<sub>2</sub> emissions than the optimum cost designs. Yeo & Gabbai [7] investigated optimum designs of RC beams for minimum embodied energy. They observed that minimum embodied energy design results in decreases on the order of 10% in embodied energy at the expense of an increase on the order of 5% in cost relative to minimum cost designs. Camp and Huq [8] examined CO<sub>2</sub> and material cost optimization of RC frames. They found that a modest 2% increase in cost over the minimum cost design can result in 8-10% reduction in CO<sub>2</sub> emissions. Medeiros and Kripka [9] examined optimum designs of RC columns under uniaxial bending and compression loads for different environmental assessment parameters including CO<sub>2</sub> emissions. They found that designs for minimum CO<sub>2</sub> emissions produce 1% less CO<sub>2</sub> footprint and they are 1% more expensive than minimum cost-based designs. Furthermore, Yeo and Potra [10] investigated the potential of

additional reductions of CO<sub>2</sub> emissions of RC frames when setting as single design objective the CO<sub>2</sub> footprint instead of construction cost. They concluded that the CO<sub>2</sub>-based designs result in a footprint that is 5-15% lower than the design for minimum cost. Furthermore, they observed that the actual amount of reduction strongly depends on the ratio of the unit cost of reinforcing steel to the unit cost of concrete and the ratio of the unit environmental impacts of these two materials [10].

The previous optimization efforts do not address seismic design of RC frames. However, in many countries around the globe, including most of the top-10 countries in CO<sub>2</sub> emissions from cement production (e.g. India, Iran, Turkey, Japan) [2], RC structures need to be designed against earthquake hazard. An overview of the existing seismic design optimization frameworks can be found in Fragiadakis and Lagaros [11]. The more recent studies on optimum seismic design of RC structures focus on performance-based design (PBSD) methodologies [e.g. 12-16]. However, all previous research efforts on optimum seismic design of RC structures set construction and/or life-cycle economic costs as design objectives [11].

Indeed, the environmental impact of RC structures designed for seismic resistance has very little been explored. Tsimplokoukou *et al.* [17] and Romano *et al.* [18], recommend a sustainable seismic design methodology, where the results of an environmental life-cycle assessment in terms of environmental units are added to the results of a life-cycle performance-based structural assessment expressed in monetary values by transforming the former to equivalent monetary values. Furthermore, Hossain and Gencturk [19] developed a detailed framework for the assessment of life-cycle environmental impact of RC buildings accounting also for the emissions produced for repairing RC members after damaging earthquakes. Moussavi Nadoushani and Akbarnezhad [20] examined 15 different lateral force resisting systems, including moment resisting frames and shear walls, for buildings located in regions of moderate seismicity concluding that the selection of the structural system influences significantly the life-cycle environmental impact. Belleri and Marini [21] showed that in the case of an old existing building, located in a region of high seismicity, which underwent only energy refurbishment the expected annual environmental impact due to seismic risk is almost equal to the respective annual operational impact after thermal refurbishment. Furthermore, Tapia and Padgett [22] developed a multi-objective optimization framework for retrofit of bridges under natural hazards, including earthquakes, where life-cycle cost and environmental impact are set as design objectives. However, an existing steel bridge is used as case study. The author [23] examined seismic designs of single RC beam and column members for minimum embodied CO<sub>2</sub> emissions according to Eurocode 8 [24] for all ductility classes (Low,



In this formulation,  $F(\mathbf{x})$  is the objective function and  $\mathbf{x}$  is the design solution vector that comprises of  $n$  independent design variables  $x_i$  ( $i=1$  to  $n$ ). The design variables  $x_i$  take values from discrete values sets  $\mathbf{D}_i=(d_{i1}, d_{i2}, \dots, d_{iki})$ , where  $d_{ip}$  ( $p=1$  to  $k_i$ ) is the  $p$ -th possible discrete value of design variable  $x_i$  and  $k_i$  is the number of possible discrete values of  $x_i$ . Furthermore, the solution should be subject to  $m$  number of constraints  $g_j(\mathbf{x})\leq 0$  ( $j=1$  to  $m$ ). The specification of the optimization problem components in the case of optimum seismic design of RC frames examined in this study is described in the following sections.

## 2.2 Objective function

Typically, the objective function in optimum design of RC frames  $F(\mathbf{x})$  is set to be the material cost  $C(\mathbf{x})$ . Alternatively, as discussed in the introduction section, the environmental impact  $E(\mathbf{x})$ , expressed herein in terms of embodied CO<sub>2</sub> emissions, can be used. In both cases, the cost/environmental impact is calculated as the sum of the contributions of concrete  $F_c(\mathbf{x})$ , formwork  $F_f(\mathbf{x})$  and steel  $F_s(\mathbf{x})$ . The latter can be taken as the sum of the contributions of longitudinal and transversal steel reinforcement.

The previous are summarized in Eq. (2), where  $V_c$  (m<sup>3</sup>) is the concrete volume,  $m_s$  (kg) the mass of steel reinforcement and  $A_f$  (m<sup>2</sup>) the area of the formwork.  $F_{co}$ ,  $F_{so}$  and  $F_{fo}$  are the unit prices of concrete, steel and formwork respectively. When the unit economic costs (expressed in Euros per material unit quantities) are set as unit prices (columns 2-3 of Table 1), then Eq. (2) determines the economic cost  $C(\mathbf{x})$ . Alternatively, if the material unit environmental impacts (expressed in kgCO<sub>2</sub> per material unit quantities) are used (columns 4-7 of Table 1), then Eq. (2) calculates embodied CO<sub>2</sub> emissions  $E(\mathbf{x})$ .

$$F(\mathbf{x}) = F_c(\mathbf{x}) + F_s(\mathbf{x}) + F_f(\mathbf{x}) \rightarrow F(\mathbf{x}) = V_c(\mathbf{x}) \cdot F_{co} + m_s(\mathbf{x}) \cdot F_{so} + A_f(\mathbf{x}) \cdot F_{fo} \quad (2)$$

Table 1 presents the unit prices adopted in this study for the economic cost and CO<sub>2</sub> emissions. The economic values are based on the Hellenic Ministry of Public Works [25]. The unit environmental impact values of concrete and steel are taken from [26]. In this study, cradle to gate embodied CO<sub>2</sub> emissions are specified that include the impacts of the extraction of the raw material and factory production. Therefore, impacts due to delivery to the site, operational and end of life impacts are not taken into consideration. It is found therein that the embodied environmental impact of concrete and reinforcing steel materials present significant variations. In the case of concrete, the variations come from either the specification of the concrete mix

or from the different processes used to make Portland cement clinker. The variations of reinforcing steel embodied CO<sub>2</sub> values depend primarily on its recycled content. To envelope all possible scenarios, a range of values (low – typical – high) is provided in [26], as shown in Table 1. In addition, the unit environmental impact value of formwork is taken from [6].

Table 1: Material unit costs and environmental impacts

Material	Economic Unit Cost	Units	Environmental Unit Impact			Units
			Low	Typical	High	
Concrete C25/30	101.0	(€/m <sup>3</sup> )	142.0	228.0	319.0	(kgCO <sub>2</sub> /m <sup>3</sup> )
Concrete C32/40	116.0	(€/m <sup>3</sup> )	161.0	264.0	377.0	(kgCO <sub>2</sub> /m <sup>3</sup> )
Steel B500c	1.07	(€/kg)	0.43	0.87	1.77	(kgCO <sub>2</sub> /kg)
Formwork	15.7	(€/m <sup>2</sup> )	8.9 for columns; 3.1 for beams			(kgCO <sub>2</sub> /m <sup>2</sup> )


### 2.3 Design parameters and variables

In optimization problems, the input data are divided in design parameters that are assumed fixed and design variables that change values during the solution process. In this study, for the sake of simplicity, geometry (i.e. storey heights and member lengths), material properties and loading of RC frames are treated as design parameters. Therefore, the present study examines solely sizing optimization of RC frames, where only beam and column members cross-sectional characteristics need to be specified (Fig. 1).

For the square column sections assumed in this study (Fig. 1a), these characteristics are the cross-sectional dimension  $h_c$ , the diameter  $d_{bc}$  and number  $n_c$  of main bars per side and the diameter  $d_{bwc}$ , spacing  $s_c$  and number of legs  $n_{wc}$  of transverse reinforcement. For rectangular beam sections (Fig 1b), these characteristics are the cross-sectional dimensions  $h_b$  and  $b_b$ , the diameter  $d_{bt}$  and number of main bars  $n_{bt}$  at the top and the diameter  $d_{bb}$  and number of main bars  $n_{bb}$  at the bottom, the diameter  $d_{bwb}$ , spacing  $s_b$  and number of legs  $n_{wb}$  of transverse reinforcement parallel to beam section height.

As a first approach, all these characteristics can be used as design variables. However, this approach leads to a high number of design variables, even for very simple RC frames, undermining the computational efficiency and accuracy of the optimization problem. Alternatively, only cross-sectional dimensions can be used as design variables  $x_i$  and reinforcing steel characteristics may then be determined following standard structural design methodologies. The latter approach is straightforward in the context of seismic design according to Eurocode-8, as opposed to more advanced seismic design methodologies [16],


because in the case of Eurocode-8 structural analysis depends only on cross-sectional dimensions. Therefore this approach is adopted in the next of this study.

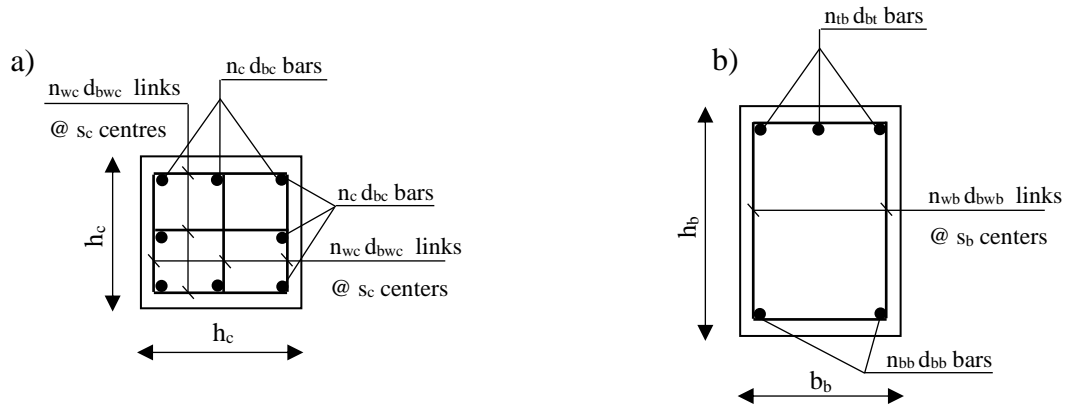

**Fig. 1:** Cross-sectional characteristics: a) column sections; b) beam sections

#### 2.4 Design constraints and solution strategy

Design constraints  $g_i(\mathbf{x}) \leq 0$  represent herein the design provisions of Eurocode-2 (EC2) [27] and Eurocode-8 (EC8) [24]. A detailed description of these constraints can be found in [16]. First, design solutions are checked to verify that they comply with construction practice limitations (e.g. the width of beams cannot be greater than the width of adjoining columns) and that they satisfy Damage Limitation (DL) limit state for non-structural components as well as the limitations for P-delta effects. Next, steel reinforcement demands are calculated for the Ultimate Limit State (ULS) according to EC2 and EC8 provisions. Then, using exhaustive search or any other optimization algorithm, steel reinforcement characteristics are selected to satisfy, in the most efficient way, both steel reinforcement demands and the detailing rules of EC2 and EC8 including checks for confinement when necessary. If an appropriate steel reinforcement configuration is found then the design solution is branded feasible and the value of the objective function is returned to the optimizer. Otherwise, the design is not feasible and a penalty term is added to the value of the objective function. The afore-described procedure is illustrated in Fig. 2.

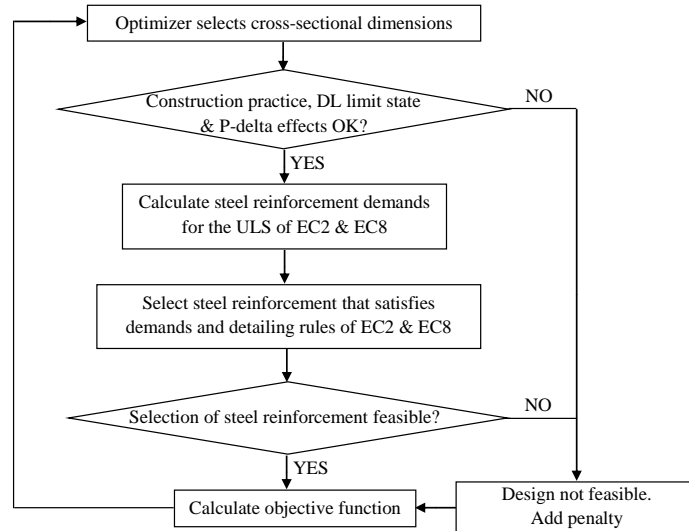

**Fig. 2:** Optimum seismic design to EC8 flowchart

## 2.5 Optimization algorithm

Different algorithms can be used to solve the optimization problem of Eq. (1). Metaheuristic optimization algorithms are nature-inspired search procedures that discover optima by randomization and local search [28]. They are well suited to structural engineering problems as they do not require calculation of derivatives [28, 29]. Furthermore, they are almost guaranteed to provide near global optimal solutions even to problems, where classical methods are trapped in local optima [28, 29].

Genetic Algorithms (GAs) [30] are metaheuristic optimization algorithms imitating Darwin's theory of evolution. GAs gradually modify populations (generations) of candidate solution vectors  $x$  (individuals) until the improvement of next generations is below a pre-specified tolerance. Individuals of next generations (children) are formed from selected individuals of previous generations (parents) based on their objective function values.

In this study, the mixed-integer GA as implemented in MATLAB-R2017a [31] is employed. This algorithm handles both continuous and discrete design variables by using special crossover and mutation functions [32]. In addition, it considers nonlinear constraints by adopting the penalty function approach [33].


### **3. Numerical applications**

#### *3.1 Introduction*

In the following, different optimum seismic design solutions of a three-storey two-bay (Fig. 3) RC frame for minimum embodied CO<sub>2</sub> and/or economic cost are developed and compared. The frame is part of a building of ordinary importance that rests on soil class B following the classification of EC8 [24]. Concrete cover is assumed to be 30mm. Uniform distributed loads of 22.5kN/m act along beam members of all storeys for the quasi-permanent load combination of EC8. Furthermore, point loads of 67.5kN and 135kN are applied at the exterior and interior joints respectively for the same load combination. The quasi-permanent weight of all storeys is equal to 540kN.

Due to symmetry and for the sake of simplicity, one square cross-section is assumed for both exterior columns and one square cross-section for the interior column. Furthermore, the same rectangular cross-section is assumed for both beams of each storey. A different beam section is used, however, for each of the frame storeys. For simplicity, it is assumed that steel reinforcement does not vary along member lengths. In total, 8 independent design variables are employed in this case study representing the afore-mentioned cross-sectional dimensions of the RC frame.

For the optimum designs, it is assumed that cross-sectional dimensions take values starting from 300mm and increasing by 50mm. Transverse reinforcement spacing of beam and columns takes values between 75mm and 300mm with a step of 25mm. Numbers of main bars and legs of shear reinforcement may take any integer value greater than one. Furthermore, the diameters of the longitudinal bars are assumed to take values from the following discrete set (14mm, 16mm, 18mm, 20mm and 25mm) whereas diameters of transverse reinforcement take values from (8mm, 10mm, 12mm) in accordance with standard construction practice.

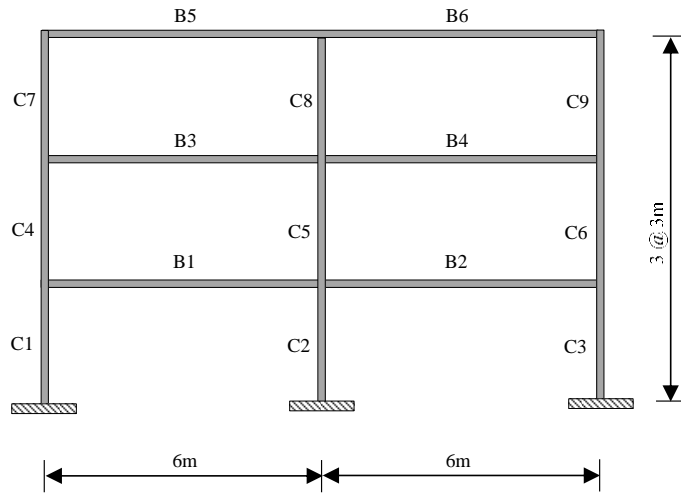

**Fig. 3:** Examined three-storey two-bay frame

In the following, the RC frame is optimally designed according to all ductility classes of EC8 for various design Peak Ground Acceleration (PGA) values, concrete classes, material CO<sub>2</sub> footprint scenarios and design objectives. Due to the regularity of the low-rise frame under investigation, the lateral force method of analysis is used to calculate seismic responses. In all cases, the optimization results reported herein were obtained by using the GA algorithm in MATLAB with 50 individuals per generation. Iterations were terminated when the mean relative variation of the best fitness value was negligible for more than 50 generations. MATLAB-R2017a [31] default options were used for GA operations. Ten independent GA runs for each design problem were conducted and the minimum objective function solutions are provided herein. It is worth noting that in all cases the GA runs for the same design problem returned objective function solutions that didn't vary more than 1%. This shows the level of accuracy of the obtained optimum solutions.

### 3.2 Seismic design methodology

In this section, the RC frame of Fig. 3 is optimally designed according to EC8 for ductility class high (DCH), medium (DCM) and low (DCL). All designs are performed for 0.40g design PGA value. Concrete C25/30 and reinforcing steel B500C in accordance with EC2 [27] specifications are used. Concrete and reinforcing steel costs and CO<sub>2</sub> emissions are taken from Table 1 following the typical environmental impact scenarios. Designs for both minimum cost and CO<sub>2</sub> footprint are examined.

Figs. 4a and 4b present optimization histories of the minimum CO<sub>2</sub> and material cost solutions. It can be seen that all solutions terminate when the objective functions remain practically constant for more than 50 generations. Fig. 4c shows the minimum CO<sub>2</sub> impacts

derived by following the different design approaches. It is shown that DCL produces the highest and DCH the lowest emissions. DCM solution generates CO<sub>2</sub> emissions very similar to DCH. It is interesting to note that DCL produces 60% more CO<sub>2</sub> emissions than DCH. This is explained by the fact that seismic forces for DCH and DCM are significantly reduced with respect to DCL by the application of the behavior factor  $q$  that accounts for ductility capacity of structures [24]. As shown in [23], CO<sub>2</sub> emissions of RC members are drastically reduced as design seismic forces decrease. On the other hand, the use of additional transverse reinforcement, to achieve higher ductility capacity for DCM and DCH, does not increase significantly CO<sub>2</sub> footprint due to the small contribution of transverse reinforcement to the total CO<sub>2</sub> emissions [23]. As a result, embodied CO<sub>2</sub> can be significantly lesser for higher ductility classes. Similar conclusions can be drawn in the case of minimum material costs as shown in Fig. 4d.

It is customary to express CO<sub>2</sub> emissions of buildings in terms of kgCO<sub>2</sub> per gross floor area. In this case study, the total floor area of all three storeys of the concrete building attributed to the examined structural frame is equal to 108m<sup>2</sup>. Therefore, the CO<sub>2</sub> emissions of the frame under examination in terms of kgCO<sub>2</sub> per gross floor area are equal to 66.4kgCO<sub>2</sub>/m<sup>2</sup>, 41.6kgCO<sub>2</sub>/m<sup>2</sup> and 41.4kgCO<sub>2</sub>/m<sup>2</sup> for DCL, DCM and DCH respectively. It is clarified that these values do not include the impact of the RC slabs so they are smaller than similar values published elsewhere for complete structural systems (e.g. [26]). Furthermore, these values should be treated with caution when dealing with isolated RC frames because they strongly depend on the magnitude of the applied loads and the structural layout of the building under investigation. Perhaps, a more meaningful normalization for earthquake resistant RC frames would be to divide the total environmental impact of the structural frame by its total seismic mass. In the case study under examination, the total seismic mass is 165.1t. Therefore, the environmental impacts of the RC frames per total seismic mass are equal to 43.4kgCO<sub>2</sub>/t, 27.2kgCO<sub>2</sub>/t and 27.0kgCO<sub>2</sub>/t for DCL, DCM and DCH respectively.


Fig. 4e presents the contributions of the different materials of the RC frame to the minimum CO<sub>2</sub> emissions. Concrete contributes the highest part with around 50% contribution in all designs. Next comes the longitudinal reinforcement and then the formwork. As described in the previous paragraph, the contribution of transverse reinforcement, despite increasing with the level of ductility class, is always minor. The contribution of steel reinforcement is highest in the case of DCL.


Furthermore, Fig. 4f presents the materials cost contributions of the minimum cost designs. It is shown that the concrete cost percentile contributions are significantly smaller than the

respective CO<sub>2</sub> contributions and the opposite is the case for the formwork contributions. This is justified by the unit prices of the economic cost and environmental impact of the concrete and formwork shown in Table 1. Interestingly, however, the sum of the contributions of concrete and formwork, which both depend solely on the cross-sectional dimensions, is similar in minimum CO<sub>2</sub> and cost designs. As a result, the contribution of steel reinforcement (both longitudinal and transverse) is also equivalent in the two optimum designs.

Figs. 4g and 4h present the ratio of steel mass (kg) to the concrete volume (m<sup>3</sup>) of the minimum CO<sub>2</sub> and cost design solutions respectively. This ratio is used widely in construction practice to quantify the amount of steel in concrete. It can be seen that the DCH has the highest amount of steel reinforcement per m<sup>3</sup> of concrete. This is mainly due to the additional transverse reinforcement required to achieve the increased level of ductility capacity. It is also interesting to observe that the  $m_s/V_c$  ratios are higher in the case of optimum CO<sub>2</sub> designs. This can be justified by the fact that steel is less expensive with respect to concrete in terms of CO<sub>2</sub> than in terms of material cost (Table 1 – Typical scenario). Therefore, the optimization solver seeks for design solutions with more amount of steel per m<sup>3</sup> of concrete in the case of minimum CO<sub>2</sub> designs. It is also worth mentioning that the variations between the design approaches are quite significant with the ratios ranging between 138kg/m<sup>3</sup> and 202kg/m<sup>3</sup>.

Table 2 presents the cross-sectional dimensions of the different design solutions examined in this section. It is interesting to note that the CO<sub>2</sub> and cost-based designs are characterised by similar dimensions. The same holds for the DCM and DCH designs. On the other hand, the DCL solutions are using significantly larger dimensions that may cause problems to the architectural design of the building leading to additional CO<sub>2</sub> emissions. However, architectural design considerations are out of the scope of the present study.

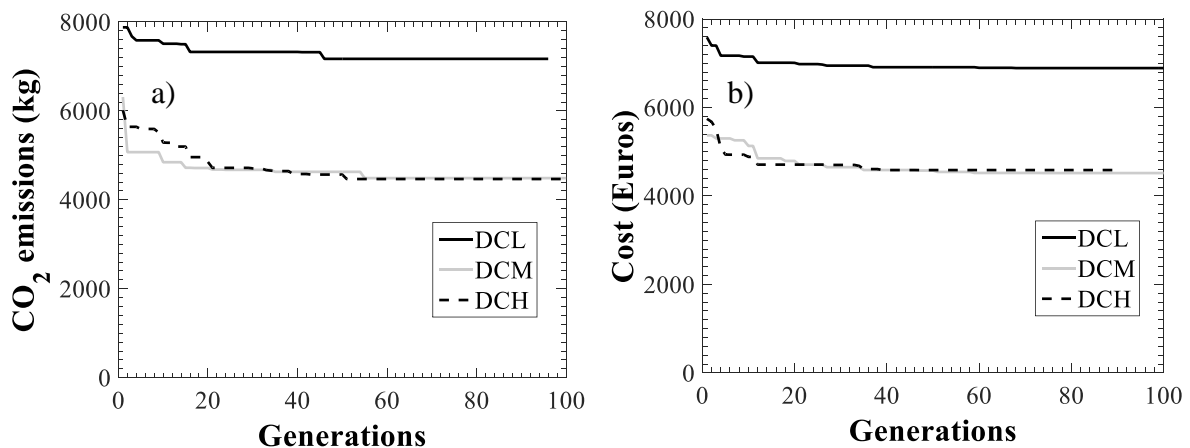

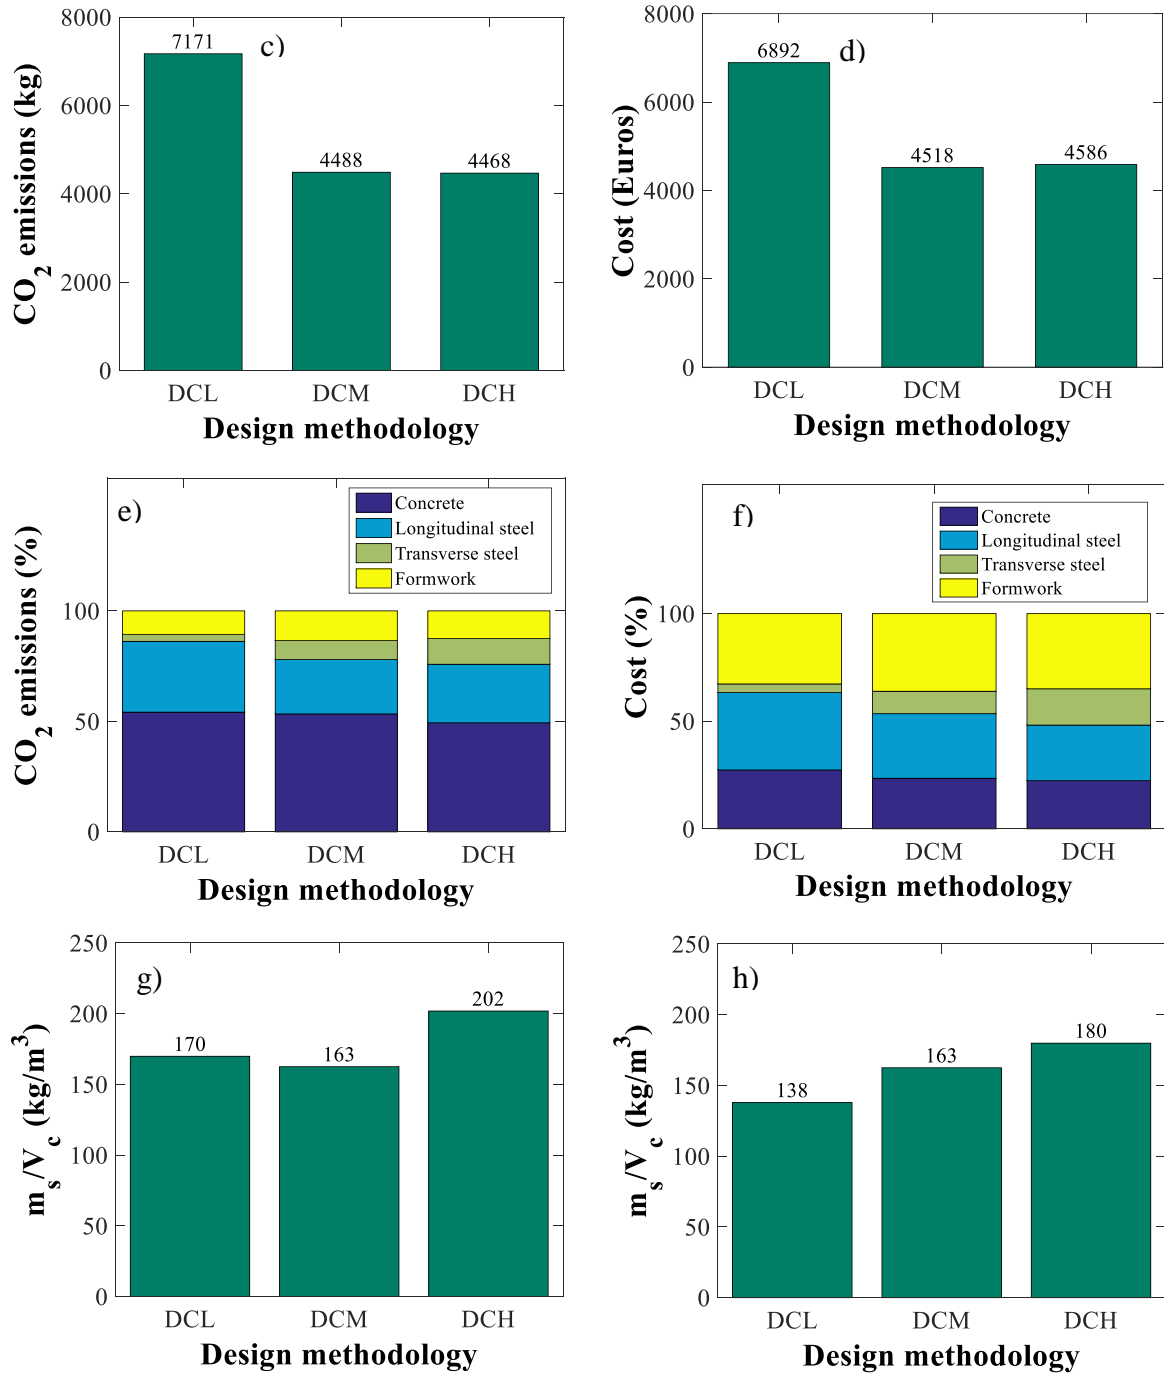

**Fig. 4:** Optimum designs according to different seismic design methodologies: a) optimization history of minimum CO<sub>2</sub> design; b) optimization history of minimum cost design; c) minimum CO<sub>2</sub> emissions; d) minimum costs; e) contributions to minimum CO<sub>2</sub> emissions; f) contributions to minimum costs; g)  $m_s/V_c$  ratios of minimum CO<sub>2</sub> solutions; h)  $m_s/V_c$  ratios of minimum cost solutions.

Table 2: Cross-sectional dimensions of different design solutions


Cross-sectional dimensions		$h_c = b_c$ (m)		$h_b / b_b$ (m / m)		
Members		C1, C3, C4, C6, C7, C9	C2, C5, C8	B1, B2	B3, B4	B5, B6
Ductility Class	Design Objective					
DCL	CO <sub>2</sub>	0.50	0.60	0.70 / 0.40	0.90 / 0.35	0.65 / 0.30
DCM	CO <sub>2</sub>	0.45	0.45	0.65 / 0.30	0.35 / 0.30	0.40 / 0.30
DCH	CO <sub>2</sub>	0.35	0.50	0.75 / 0.30	0.40 / 0.30	0.30 / 0.30
DCL	Cost	0.55	0.65	0.80 / 0.40	0.90 / 0.35	0.55 / 0.30
DCM	Cost	0.45	0.45	0.65 / 0.30	0.35 / 0.30	0.40 / 0.30
DCH	Cost	0.40	0.50	0.65 / 0.30	0.40 / 0.30	0.35 / 0.30

### 3.3 Design PGA

Herein, the RC frame of the previous section is optimally designed to all ductility classes of EC8 and for three different values of the design PGA: 0.20g, 0.30g and 0.40g representing different seismicity levels. The same material properties, costs and environmental impacts as in §3.2 are used.

Fig. 5a presents the variations of the minimum CO<sub>2</sub> emissions as a function of the design PGA. It can be seen that the emissions increase with the design PGA for all design methodologies. However, the rate of increase is not the same for all design approaches. More particularly, DCM and DCH emissions increase at a much smoother rate than DCL with PGA. Consequently, despite the fact that all ductility classes generate similar emissions for the low PGA value as they are governed by minimum detailing requirements, DCM and DCH produce significantly less emissions for higher PGA values. Therefore, it can be concluded that design for high ductility classes is more beneficial in regions of high seismicity than in regions of low seismicity. Fig. 5b shows the costs of the optimum cost solutions. It is evident that they display very similar trends to the optimum CO<sub>2</sub> values.

Figs. 5c and 5d present the contributions of concrete to the total CO<sub>2</sub> emissions and cost respectively for the different design PGA values. It is interesting to observe that these ratios do not vary considerably with the design PGA for all seismic design methodologies. However, they are significantly different for the two design objectives (CO<sub>2</sub> and cost) as discussed in the previous section.

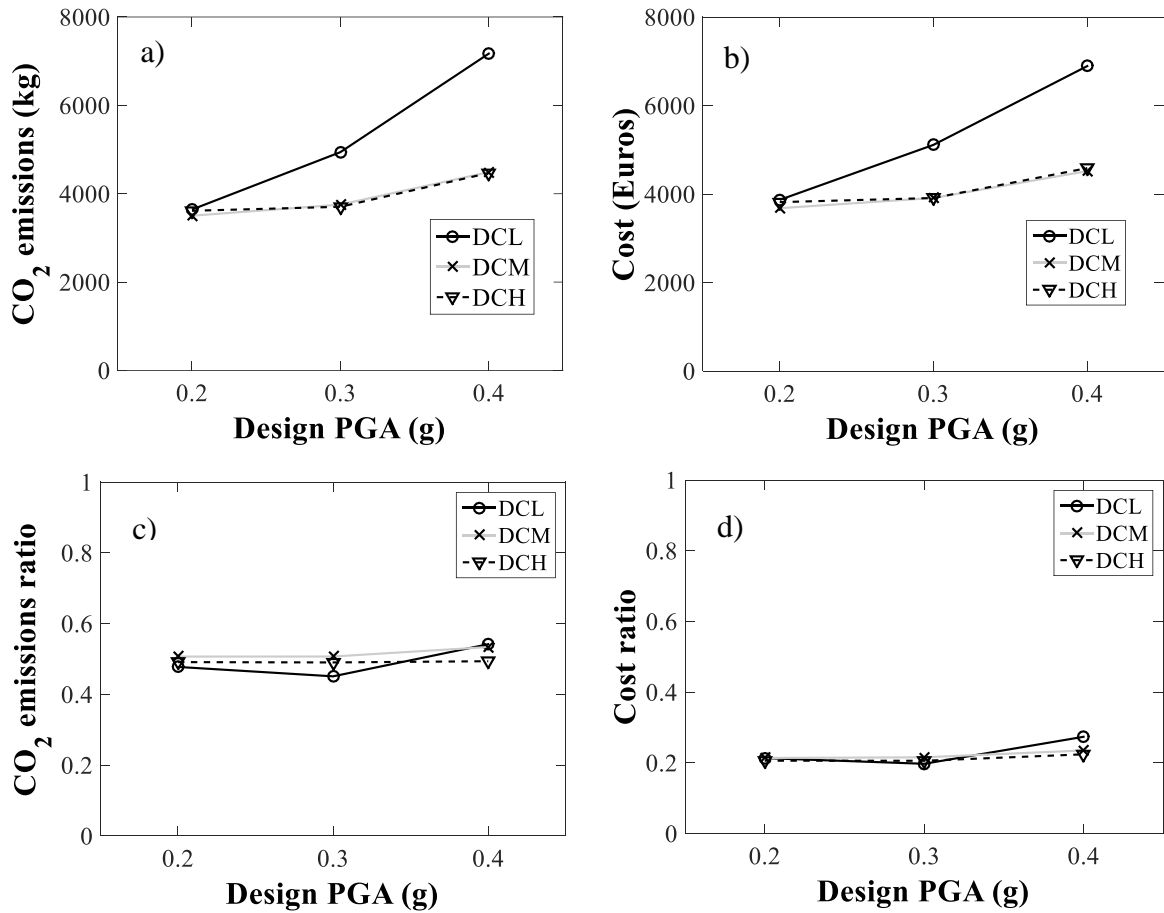

**Fig. 5:** Optimum designs for different design PGAs a) minimum CO<sub>2</sub> emissions; b) minimum costs; c) contribution of concrete to minimum CO<sub>2</sub> emissions; d) contribution of concrete to minimum costs.

### 3.4 Material embodied emissions

In this section, the influence of unit environmental impacts of concrete and reinforcing steel on the properties of the optimum design solutions is examined. To serve this goal, the ratio  $R$  is used herein [10].  $R$  is defined as the ratio of CO<sub>2</sub> footprint of 100kg of reinforcing steel to the CO<sub>2</sub> footprint of 1m<sup>3</sup> of concrete. Furthermore, three different scenarios are considered regarding the combinations of environmental impacts of C25/30 concrete and B500c reinforcing steel using the values presented in Table 1: Typical concrete – typical steel impact ( $R=0.38$ ); high concrete – low steel impact ( $R=0.13$ ) and low concrete - high steel impact ( $R=1.25$ ). These scenarios envelope all possible combinations of concrete and steel environmental impacts. The results presented in the following are based on the numerical examples of section §3.2, where only the unit environmental impacts of concrete and steel are altered.

Fig. 6a presents the ratio of CO<sub>2</sub> footprint of the minimum cost solutions over the CO<sub>2</sub> footprint of the respective minimum CO<sub>2</sub> solutions, namely  $r_{CO_2}$ , for the three different environmental impact scenarios. It can be seen that this ratio ranges between 1.0 and 1.13.

This effectively means that the minimum cost designs produce up to 13% more emissions than the minimum CO<sub>2</sub> solutions. It is also evident that  $r_{CO_2}$  is rather sensitive to  $R$ . It obtains maximum values at  $R=0.13$  and decreases considerably up to  $R=0.38$ . After this  $R$  value,  $r_{CO_2}$  remains practically constant and almost equal to 1. The latter means that the minimum CO<sub>2</sub> and minimum cost designs produce almost the same CO<sub>2</sub> emissions. It is also interesting to note that the higher  $r_{CO_2}$  values are reported for DCL. This is explained by the fact that greater cross-sections are used for this ductility class due to the higher seismic design forces and because less strict detailing rules are required for this ductility class. These facts give more flexibility to the optimizer to select alternative cross-sectional solutions.

Furthermore, Fig. 6b shows the variation of the ratio  $r_{cost}$  with  $R$ .  $r_{cost}$  is the ratio of cost of the minimum CO<sub>2</sub> solutions over the cost of the minimum cost designs. It is seen that  $r_{cost}$  varies between 1.0 and 1.078. Therefore, the minimum CO<sub>2</sub> designs cost up to 8% more than the minimum cost designs. In general, similar conclusions for  $r_{cost}$  to  $r_{CO_2}$  can be drawn.


So far in this study, the cost of carbon in monetary units has not been taken into account in the calculation of economic costs. In 2005, however, the European Union introduced the European Union Emissions Trading System (EU ETS) that converts CO<sub>2</sub> emissions into monetary values. Under the EU ETS, the European Member States allocate emissions allowances to their industrial operators, who are then able to trade them. Therefore, carbon prices are determined by the market and they are generally characterized by significant variability.

To investigate how the economic cost of carbon allowances can influence the economic comparison between minimum cost and minimum CO<sub>2</sub> designs, a carbon price of €8 per tonne of CO<sub>2</sub> emissions is used herein that is very close to the maximum carbon price of the EU ETS recorded in October 2017. Then, the total costs of the designs are calculated by adding materials costs and costs of carbon allowances. Next, the new  $r_{cost}$  ratios are calculated based on total costs. As expected, the revised  $r_{cost}$  ratios are reduced when carbon allowances are taken into account. This is due to the fact that minimum cost solutions produce more carbon emissions resulting in higher carbon costs than the minimum carbon solutions. However, these reductions are found to be negligible (e.g. the maximum  $r_{cost}$  reduces from 1.078 to 1.075). This is due to the rather small costs of carbon emissions with respect to material costs. Nevertheless, if carbon prices increase in the future then the differences are expected to be more significant.

Fig. 6c illustrates the variation of  $m_s/V_c$  ratios of the optimum CO<sub>2</sub> designs with  $R$ . It is shown that these ratios tend to decrease as  $R$  increases. This is expected since increase of  $R$

means that the steel becomes more and the concrete less ‘expensive’ in environmental terms. Therefore, less steel and more concrete is used in the optimum design solutions. The highest variation is observed for the DCL designs, where  $m_s/V_c$  decreases by approximately 50% as  $R$  increases from 0.13 to 1.25.

Moreover, Fig. 6d shows the variation of the contribution of concrete to the total environmental impact of the minimum CO<sub>2</sub> designs. Clearly, the contribution of concrete decreases as  $R$  increases. This occurs because the unit environmental impact of concrete with respect to steel decreases as  $R$  increases. The decrease of  $m_s/V_c$  ratio due to  $R$  increase is not adequate to counteract this trend.

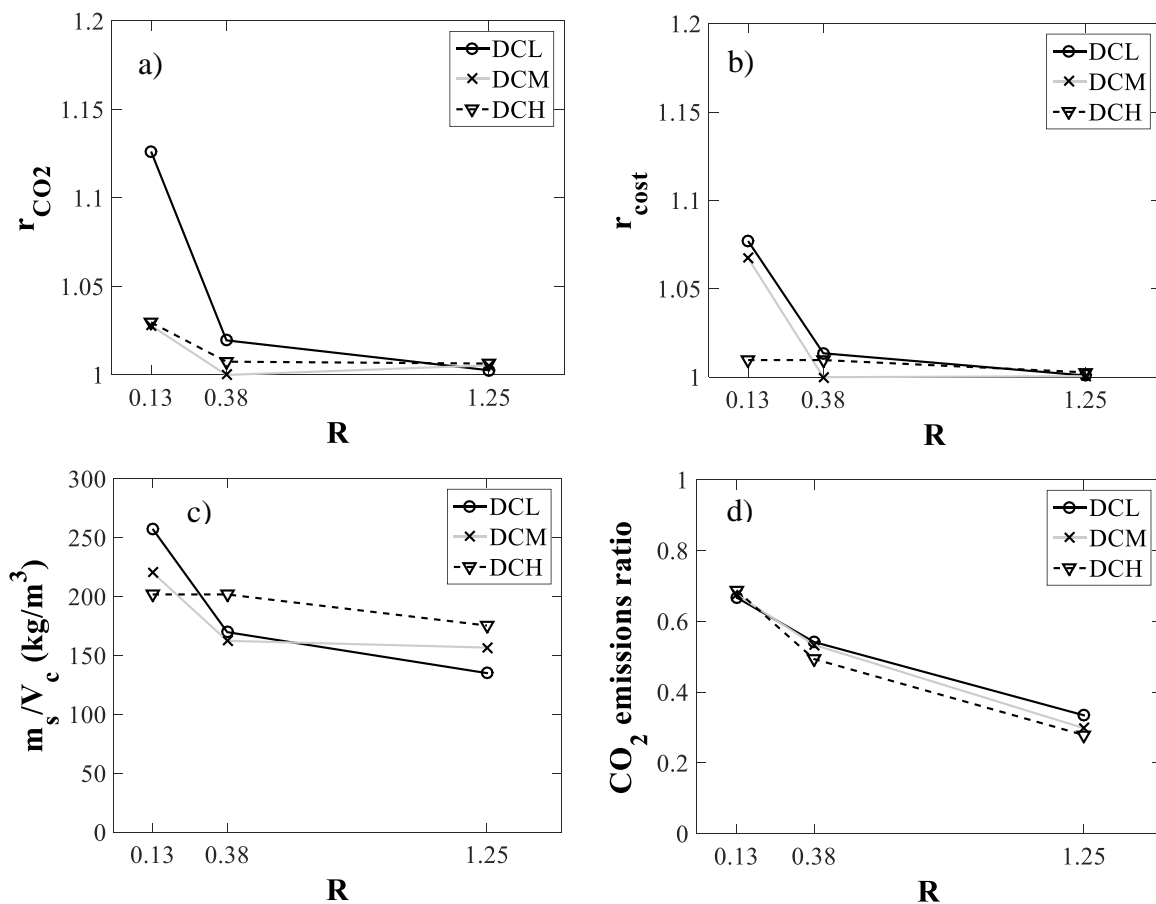

**Fig. 6:** Optimum CO<sub>2</sub>-based designs for different  $R$  values a)  $r_{CO_2}$ ; b)  $r_{cost}$ ; c)  $m_s/V_c$  ratios of minimum CO<sub>2</sub> solutions and d) contributions of concrete to minimum CO<sub>2</sub> emissions

### 3.5 Concrete class

Herein, the RC frame is optimally designed to all ductility classes of EC8 for 0.40g design PGA and assuming two different concrete classes: C25/30 and C32/40. In both cases, B500c

reinforcing steel is used. Materials costs and CO<sub>2</sub> emissions are taken from Table 1 for the typical environmental impact scenarios.

Fig. 7a presents the minimum CO<sub>2</sub> emissions produced by all design methodologies using both concrete classes. It is evident that, in all cases, the designs with the lower concrete class (C25/30) generate less CO<sub>2</sub> emissions. This can be explained by the fact that the higher concrete class (C32/40) generates 16% more CO<sub>2</sub> emissions per m<sup>3</sup> than the lower one (C25/30) based on the values presented in Table 1.

Fig. 7b shows the costs of the optimum cost solutions for all design methodologies and both concrete classes. It can be seen that now the C32/40 designs require either lower or higher costs depending on the design methodology. Even in the cases of higher C32/40 costs (DCL) the differences are considerably smaller than the CO<sub>2</sub> emissions. At first sight, this observation seems unexpected because the cost of C32/40 is also approximately 15% higher than C25/30. However, the explanation can be given by the contributions of the different materials to CO<sub>2</sub> emissions and costs. As shown in Fig. 4, concrete contributes far more to total CO<sub>2</sub> emissions than total costs. Therefore, the increase of the unit prices of concrete has higher impact on the embodied emissions than economic cost. This impact cannot be counteracted by the reduction of steel demands due to the better mechanical properties of C32/40 apart from the case of DCH minimum cost design, where the contribution of concrete to the total cost is minor (Fig. 4f). These observations drive to the conclusion that in order to achieve less CO<sub>2</sub> emissions by the use of higher concrete classes the environmental impact of the latter must be decreased.

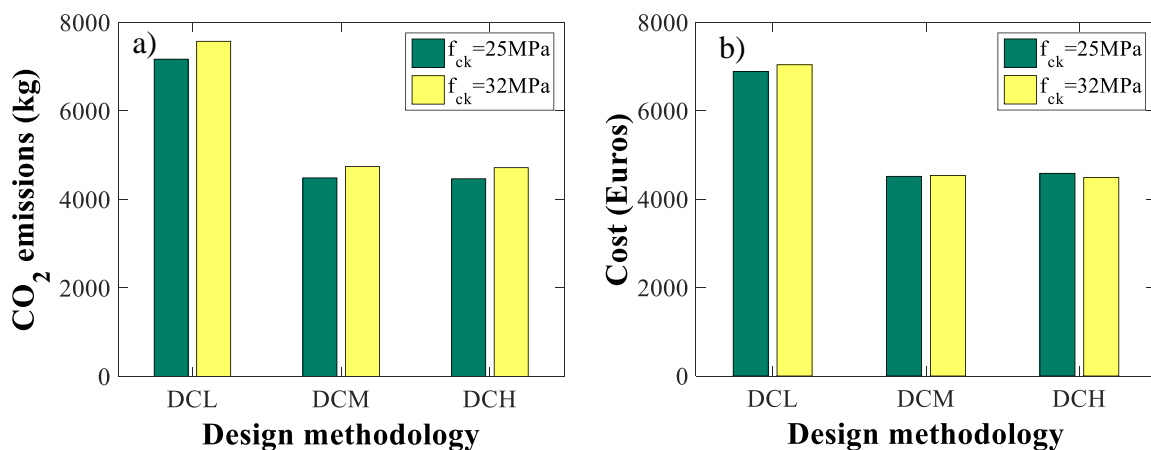


Fig. 7: Optimum designs for different concrete classes a) minimum CO<sub>2</sub> emissions; b) minimum costs

## 5 Summary and Conclusions

Reinforced concrete structures contribute significantly to global CO<sub>2</sub> emissions. This is mainly due to the embodied CO<sub>2</sub> emissions of cement and reinforcing steel. However, the

environmental impact of RC structures can be drastically reduced by applying automated optimization techniques that maximize structural efficiency.

Previous studies aiming at minimizing embodied CO<sub>2</sub> emissions of RC structures do not consider seismic design. To fill part of this gap, this study investigates optimum seismic design of RC frames for minimum cradle to gate CO<sub>2</sub> emissions and compares it with minimum cost-based design. To serve this goal, a three-storey two-bay RC frame is optimally designed according to all ductility classes of EC8 for various design PGA values, concrete classes and material embodied CO<sub>2</sub> footprint scenarios. In total, 30 different designs of the RC frame are examined. The optimum designs are conducted by employing an optimization framework based on genetic algorithms. Ten independent GA runs are conducted for each RC frame design and the minimum objective function solution is selected. GA runs always converge to very similar solutions.

It is concluded that the adopted seismic design approach affects importantly the minimum feasible CO<sub>2</sub> emissions of RC frames. More particularly, in regions of high seismicity, DCM and DCH designs produce up to 60% lesser CO<sub>2</sub> emissions than DCL. This is due to the reduction of seismic forces via the use of the behaviour factor and the fact that the additional transverse reinforcement required does not increase significantly the embodied CO<sub>2</sub>. As the level of seismicity decreases, however, the differences in CO<sub>2</sub> emissions between the optimum designs of different ductility classes tend to diminish.

It is important to clarify that the comparisons of this study examine only initial construction embodied CO<sub>2</sub> emissions. Environmental impacts related to repairs of damages caused by future earthquakes are not taken into consideration. The latter are expected to be higher in the cases of DCM and DCH with respect to DCL. Therefore, an extension of the present optimization framework to account for life-cycle embodied CO<sub>2</sub> emissions is interesting as it could modify the conclusions of the present study.

The concrete class also affects minimum CO<sub>2</sub> emissions in seismic design of RC frames. It is found that higher concrete classes, despite their better mechanical properties, lead to higher CO<sub>2</sub> emissions due to their higher unit embodied impact. However, the differences in CO<sub>2</sub> emissions between the optimum designs with different concrete classes are rather small.

Furthermore, it is observed that the differences between the optimum design solutions depend considerably on the ratio  $R$  of the unit environmental footprint of reinforcing steel to the respective footprint of concrete. More specifically, for medium to high values of  $R$  ( $R=0.38-1.25$ ), it is found that the minimum CO<sub>2</sub> designs are very closely related to the minimum cost design solutions. This is a positive conclusion because both objectives should

be considered in the design procedure. However, for low  $R$  values ( $R=0.13$ ), it is observed that the minimum cost solutions generate up to 13% more emissions than the CO<sub>2</sub>-based designs. The latter can be up to 8% more expensive than the minimum cost design solutions. It is worth mentioning herein that, with current carbon prices, carbon economic cost seems to have a negligible effect on the cost comparisons of minimum cost and CO<sub>2</sub> design solutions.

Regarding the amount of steel per m<sup>3</sup> of concrete in the minimum CO<sub>2</sub> designs, it is found that it varies for the different ductility classes and it decreases importantly as the unit environmental impact of reinforcing steel increases and/or the unit impact of concrete decreases.

For the contributions of the different materials, it is shown that formwork contributes the least to the CO<sub>2</sub> emissions of the optimum solutions. Interestingly, the respective contribution of concrete is similar for the different ductility classes and levels of the design PGA. However, it depends strongly on the unit environmental impacts of concrete and steel. It is found that for  $R \leq 0.38$  concrete contributes more than 50% to the total CO<sub>2</sub> emissions.

Closing, it is emphasized that only cradle to gate embodied CO<sub>2</sub> emissions are addressed in this study. A holistic, cradle to grave, approach that considers also operational and end of life environmental impacts is necessary to get the full picture of life-cycle CO<sub>2</sub> emissions of RC buildings. The latter approach should be incorporated in a future extension of the proposed optimization framework.

## References

- [1] Intergovernmental panel on climate change (IPCC), Climate change 2014: Synthesis report, Geneva, 2014.
- [2] J.G.J. Olivier *et al*, Trends in global CO<sub>2</sub> emissions: 2015 Report, Ispra: European Commission, Joint Research Centre, Hague, 2015.
- [3] K.C. Sarma, H. Adeli, Cost optimization of concrete structures, *Journal of Structural Engineering-ASCE* 124 (1998) 570-578.
- [4] I. Paya-Zaforteza, V. Yepes, F. Gonzalez-Vidosa, A. Hospitaler, Multiobjective optimization of concrete frames by simulated annealing. *Computer Aided Civil and Infrastructure Engineering* 23 (2008) 596-610.
- [5] M. Goedkoop, R. Spriensma, The Ecoindicator 99. A damage oriented method for life cycle impact assessment. Methodology report, Amersfoort: Product Ecology Consultants 2001.
- [6] I. Paya-Zaforteza, V. Yepes, A. Hospitaler, F. Gonzalez-Vidosa, CO<sub>2</sub>-optimization of reinforced concrete frames by simulated annealing, *Engineering Structures* 31 (2009) 1501-1508.

- [7] D. Yeo, R. Gabbai, Sustainable design of reinforced concrete structures through embodied energy optimization, *Energy and Buildings* 43 (2011) 2028-2033.
- [8] C.V. Camp, F. Huq, CO<sub>2</sub> and cost optimization of reinforced concrete frames using a big bang-big crunch algorithm, *Engineering Structures* 48 (2013) 363-372.
- [9] G. Medeiros, M. Kripka, Optimization of reinforced concrete columns according to different environmental impact assessment parameters, *Engineering Structures* 59 (2014) 185-194.
- [10] D. Yeo, F. Potra, Sustainable design of reinforced concrete structures through CO<sub>2</sub> emission optimization, *Journal of Structural Engineering-ASCE* 141 (2015) B4014002-1:7.
- [11] M. Fragiadakis, N.D. Lagaros, An overview to structural seismic design optimization frameworks, *Computers and Structures* 89 (2011) 1155-1165.
- [12] S. Ganzerli, C.P. Pantelides, L.D. Reaveley, Performance-based design using structural optimization, *Earthquake Engineering and Structural Dynamics* 29 (2000) 1677-1690.
- [13] C.M. Chan, X.K. Zou, Elastic and inelastic drift performance optimization for reinforced concrete buildings under earthquake loads, *Earthquake Engineering and Structural Dynamics* 33 (2004) 929-950.
- [14] M. Fragiadakis, M. Papadrakakis, Performance-based optimum seismic design of reinforced concrete structures, *Earthquake Engineering and Structural Dynamics* 37 (2008) 825-844.
- [15] B. Gencturk, Life-cycle cost assessment of RC and ECC frames using structural optimization. *Earthquake Engineering and Structural Dynamics* 42 (2013) 61-79.
- [16] P.E. Mergos, Optimum seismic design of reinforced concrete frames according to Eurocode 8 and *fib* Model Code 2010, *Earthquake Engineering and Structural Dynamics* 46 (2017) 1181-1201.
- [17] K. Tsimplokoukou, M. Lamperti, P. Negro, Building design for safety and sustainability, Ispra: European Commission, Joint Research Centre, Luxembourg, 2014.
- [18] E. Romano, P. Negro, F. Taucer, Seismic performance assessment for addressing sustainability and energy efficiency, Ispra: European Commission, Joint Research Centre, Luxembourg, 2014.
- [19] K. Hossain, B. Gencturk, Life-cycle environmental impact assessment of RC buildings subjected to natural hazards. *Journal of Architectural Engineering* (2014) A4014001: 1-12.
- [20] Z. Moussavi Nadoushani, A. Akbarnezhad, Effects of structural system on the life cycle carbon footprint of buildings, *Energy and Buildings* 102 (2015) 337-346.
- [21] A. Belleri, A. Marini, Does seismic risk affect the environmental impact of existing buildings?, *Energy and Buildings* 110 (2016) 149-158.
- [22] C. Tapia, J.E. Padgett, Multi-objective optimization of bridge retrofit and post-event repair selection to enhance sustainability, *Structure and Infrastructure Engineering* 12 (2016) 93-107.
- [23] P.E. Mergos, Contribution to sustainable seismic design of reinforced concrete members through embodied CO<sub>2</sub> emissions optimization, *Structural Concrete* (2017), published online, DOI: 10.1002/suco.201700064.
- [24] CEN, Eurocode 8: Design of structures for earthquake resistance. Part 1: General rules, seismic actions and rules for buildings, Brussels: European Standard EN 1998-1, 2004.
- [25] HMPW, Readjustment and completion of invoices of public works, Athens: Hellenic Ministry of Public Works, 2013.
- [26] S.C. Kaethner, J.A. Burrige, Embodied CO<sub>2</sub> of structural frames, *Structural Engineer* 90 (2012) 33-40.
- [27] CEN, Eurocode 2: Design of concrete structures. Part 1-1: General rules and rules for buildings, Brussels: European Standard EN 1992-1-1, 2000.

- [28] X. Yang, Nature-inspired optimization algorithms, London: Elsevier Insights, 2014.
- [29] N.D. Lagaros, A general purpose real-world structural design optimization computing platform, *Structural and Multidisciplinary Optimization* 49 (2014) 1047-1066.
- [30] J. Holland, *Adaptation in natural and artificial systems*, Ann Arbor, MI, USA: University of Michigan Press, 1975.
- [31] MathWorks, MATLAB R2017a – Global Optimization Toolbox, Natick, MA, USA: The MathWorks Inc, 2000.
- [32] K. Deep, K.P. Singh, M.L. Kansal, C. Mohan, A real coded genetic algorithm for solving integer and mixed integer optimization problems, *Applied Mathematics and Computation* 212 (2009) 505–518.
- [33] K. Deb, An efficient constraint handling method for genetic algorithms, *Computer Methods in Applied Mechanics and Engineering* 186 (2000) 311–338.