



City Research Online

City, University of London Institutional Repository

Citation: Nguyen-Huu, N., Pistora, J., Cada, M., Nguyen-Thoi, T., Ma, Y., Yasumoto, K., Rahman, B. M., Wu, Q., Ma, Y., Ngo, Q. H., et al (2021). Ultra-wide Spectral Bandwidth and Enhanced Absorption in a Metallic Compound Grating Covered by Graphene Monolayer. *IEEE Journal of Selected Topics in Quantum Electronics*, 27(1), pp. 1-8. doi: 10.1109/jstqe.2020.2984559

This is the accepted version of the paper.

This version of the publication may differ from the final published version.

Permanent repository link: <https://openaccess.city.ac.uk/id/eprint/24170/>

Link to published version: <https://doi.org/10.1109/jstqe.2020.2984559>

Copyright: City Research Online aims to make research outputs of City, University of London available to a wider audience. Copyright and Moral Rights remain with the author(s) and/or copyright holders. URLs from City Research Online may be freely distributed and linked to.

Reuse: Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

City Research Online:

<http://openaccess.city.ac.uk/>

publications@city.ac.uk

Ultra-wide Spectral Bandwidth and Enhanced Absorption in a Metallic Compound Grating Covered by Graphene Monolayer

Nghia Nguyen-Huu, *Senior, IEEE*, Jaromír Pištora, Michael Cada, Trung Nguyen-Thoi, Youqiao Ma, Kiyotoshi Yasumoto, *Fellow, IEEE*, B. M. Azizur Rahman, *Fellow, IEEE*, Qiang Wu, Yuan Ma, Quang Hieu Ngo, *Senior, IEEE*, Lin Jie, and Hiroshi Maeda

Abstract— Graphene, a two-dimensional monatomic layer of carbon material, has demonstrated as a good candidate for applications of ultrafast photodetectors, transistors, transparent electrodes, and biosensing. Recently, many studies have shown that using metallic deep gratings could enhance the absorbance of graphene of 2.3% up to 80% in the near infrared region for applications in photon detection. **This paper presents utilizing a nanograting structure, namely, a compound metallic grating could greatly enhance the absorbance of graphene up to 98% and widen its spectral bandwidth to 0.6 μm , which are greater than those of previous work.** The study also showed that the absorbance spectrum is insensitive to angles of incidence. Furthermore, the proposed graphene-covered compound grating might bring a lot of benefits for graphene designs-based optical and optoelectronic devices.

This work was supported by Division of Computational Mathematics and Engineering, Institute for Computational Science, Ton Duc Thang University, Vietnam and Faculty of Electrical & Electronics Engineering, Ton Duc Thang University, Vietnam. J. P. also acknowledged the support from the project CZ. 1.05/2.1.00/19.0387 “Development of research and development basis of RMSTC”, Research and Development for Innovations and the Structural Funds, and the state budget of the Czech Republic. (Corresponding author: Nghia Nguyen-Huu.)”

Nghia Nguyen-Huu, is with Division of Computational Mathematics and Engineering, Institute for Computational Science, Ton Duc Thang University, Vietnam and Faculty of Electrical & Electronics Engineering, Ton Duc Thang University, Ho Chi Minh City, Vietnam (corresponding author’s email: nguyenhuonghia@tdtu.edu.vn)

Jaromír Pištora is with Nanotechnology Center, VSB-Technical University of Ostrava, 17. Listopadu 15, Ostrava—Poruba, Czech Republic

Michael Cada and Yuan Ma are with Department of Electrical and Computer Engineering, Dalhousie University, Canada

Trung Nguyen-Thoi is with Division of Computational Mathematics and Engineering, Institute for Computational Science, Ton Duc Thang University, Vietnam and Faculty of Civil Engineering, Ton Duc Thang University, Ho Chi Minh City, Vietnam

Youqiao Ma is with School of Physics and Optoelectronic Engineering, Nanjing University of Information Science and Technology, Nanjing, 210044, People’s Republic of China

Kiyotoshi Yasumoto is with Faculty of Information Science and Electrical Engineering, Kyushu University, Fukuoka 819-0395, Japan

B. M. Azizur Rahman is with Department of Electrical and Electronic Engineering, City University of London, Northampton Square, EC1V 0HB, UK

Qiang Wu is with Department of Mathematics, Physics, and Electrical Engineering, Northumbria University, Newcastle upon Tyne, UK

Quang Hieu Ngo is with College of Engineering Technology, Can Tho University, Can Tho, Vietnam

Lin Jie is with Center of Ultra-Precision Optoelectronic Engineering, Harbin Institute of Technology, Harbin 150080, China

Hiroshi Maeda is with Department of Information and Communication Engineering, Fukuoka Institute of Technology, Fukuoka 811-0295, Japan

Index Terms—graphene, numerical analysis, optoelectronic devices, photodetectors, subwavelength gratings

I. INTRODUCTION

GRAPHENE is a two-dimensional (2D) material with carbon atoms arranged in a honeycomb lattice, and it offers many potential applications for optoelectronic devices due to its unique electrical, mechanical, and optical characteristics [1-8]. To be detailed, the electrons in graphene are known as massless quasi-particles exhibiting a linear energy dispersion. More importantly, a very high carrier mobility (larger than $200,000 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$) makes graphene as an excellent material used for ultrafast photodetectors and transistors in the visible and near infrared (NIR) regions [2, 7, 8]. Unlike transistors, the photon detectors are designed with a requirement of strong light absorbance which generates more electro-hole pairs, and it thus produces a greater photocurrent [7, 9-11].

As demonstrated, optical properties of graphene in the mid- and far-IR are similar to those of Drude-type materials and make strong resonance absorption when graphene interacts with light due to its plasmonic resonance [12-17]. On the other hand, in the visible and NIR ranges, there is no plasmonic response, and the absorption of a single-layered graphene is about 2.3% due to its very thin thickness [18]. Accordingly, absorption enhancement is necessary for the application of photon detection based on graphene designs. Many methods of the absorption enhancement have been proposed by using microcavities and nanostructures [7, 19-31]. A microcavity enhances absorption by allowing light to pass through the graphene layer multiple times [7]. **Meanwhile, a deep grating structure covered by a graphene sheet could also enhance absorbance due to a strong localized electric field causing the magnetic resonances [9, 23, 24, 32, 33]. Although this grating exhibits absorbance of 81% and a spectral bandwidth of 0.3 μm , it is very sensitive to angles of incidence [23, 24]. Accordingly, novel structures featuring a higher absorbance, a wider bandwidth and independence on angles of incident light are still in need. One of the simple gratings, namely a single-layered compound grating (CG) has not yet been studied and utilized to increase the absorption of graphene and widen its spectral bandwidth.**

In the present study, we propose CGs used to enhance graphene absorption, and its enhancement is caused by strong localized electromagnetic fields inside grating trenches and surface plasmons. A CG has a several multiple grating periods [34], and it is also named as a double-period grating, a

dual-pitch grating, a dual-period grating or a complex grating [35-38]. On the contrary, a simple grating (SG) has a single grating period [17]. Figure 1 (a) shows the schematic of a silver (Ag) SG structure while Fig. 1(b) similarly illustrates an Ag grating but covered by a graphene sheet on the top. As demonstrated in previous studies, graphene covered on SG structures works as a pure conductor or resistor in the NIR region which could absorb a large of incidence energy at the trench opening of deep gratings [23]. In addition to that, it was seen that resonance wavelengths in the SG structures and the structures covered by a graphene sheet remain unchanged. Accordingly, in order to enhance the absorption of graphene, this manuscript presents an optimal analysis of the absorptance of different SG structures. Their geometries are then tailored to have CG structures that could significantly elevate the absorption and their physical phenomena are investigated as well.

II. MODELING DEVELOPMENT AND NUMERICAL METHOD

A. Geometric Grating Structure

As shown in Fig. 1(a), the geometry of the SG structure is defined by the period (Λ), the lamella width $w\Lambda$ (w is the filling ratio, $0 < w < 1$), and the grating thickness (d). Similarly, Fig. 1(b) shows the same SG but covered by a graphene layer (at $z = 0$) with a thickness of h . The incident transverse magnetic (TM) \mathbf{H} travels through free space with an orientation defined by the polar angle θ between the wavevector \mathbf{k} and the surface normal z . For the one-dimensional gratings shown in Fig. 1, the electromagnetic field is independent to y -axis because the wavevectors of all diffracted waves lie in the x - z plane, and thus, there are no excitations in the y direction. **In this study, the TM wave is used for calculations because as theoretically and experimentally demonstrated designer surface plasmons (SPPs) or Fabry-Perot modes could be excited when the TM polarization is applied in the y direction [17, 23, 24, 34, 39-42].** The Ag base below the grating is assumed to be thick enough as an opaque. Accordingly, the transmittance is equal to 0, and the absorptance (α) can be computed from the reflectivity (R) via $\alpha = 1 - R$, where the reflectivity was calculated by the rigorous coupled-wave analysis (RCWA) based on a home-made program [43].

B. Numerical Method

In the simulation, the optical property of Ag is calculated based on a Lorentz-Drude model [43] [44] expressed as:

$$\varepsilon(\omega) = \varepsilon_{r,\infty} + \sum_{k=0}^K \frac{f_k \omega_p^2}{\omega_k^2 - \omega^2 + j\omega\Gamma_k} \quad (1)$$

where $\varepsilon_{r,\infty}$ is the dielectric constant at infinite frequencies, ω_k , f_k and Γ_k are the resonance frequency, strength and damping frequency of the k th oscillator, and ω_p is the plasma frequency. These values of Ag are taken from [44]. Meanwhile, the dielectric function of graphene is described as $\varepsilon(\omega) = 1 + i\sigma_s / (\varepsilon_0 \omega h)$ [6], where σ_s , ε_0 , and ω are the sheet

conductivity, the vacuum permittivity, and the angular frequency, respectively. The sheet conductance σ_s ($\sigma_s = \sigma_D + \sigma_I$) including the contribution of a Drude (intraband) term σ_D and an interband term σ_I is described as:

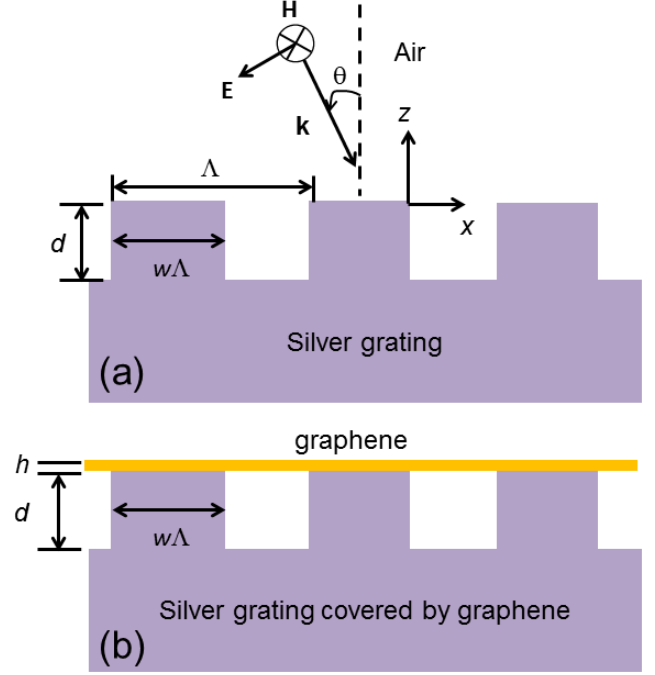


Fig.1. Schematic illustration of (a) grating structure and (b) graphene-covered Ag grating. Their geometries are defined by grating period Λ , grating thickness d , lamella width $w\Lambda$ (w is filling ratio), and graphene thickness h . The transverse magnetic wave \mathbf{H} (parallel to the grating grooves or y -axis) is incident on the grating with a wavevector \mathbf{k} and an angle θ

$$\sigma_D = \frac{i}{\omega + i/\tau} \frac{2e^2 k_B T}{\pi \hbar^2} \ln \left[2 \cosh \left(\frac{\mu}{2k_B T} \right) \right], \quad (2)$$

and

$$\sigma_I = \frac{e^2}{4\hbar} \left[G \left(\frac{\hbar\omega}{2} \right) + i \frac{4\hbar\omega}{\pi} \int_0^{\infty} \frac{G(\xi) - G(\hbar\omega/2)}{(\hbar\omega)^2 - 4\xi^2} d\xi \right], \quad (3)$$

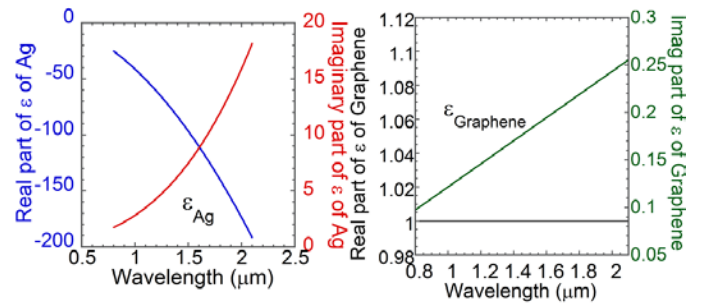


Fig.2. Real and imaginary parts of the permittivity of Ag and graphene. It is noted that the permittivity of graphene is computed based on $\mu = 0.3$ eV, $\tau = 10^{-13}$ s, $T = 300$ K, and $h = 0.3$ nm

where $G(\xi) = \sinh(\xi/k_B T) / [\cosh(\mu/k_B T) + \cosh(\xi/k_B T)]$ [14]. In the above equations, e is the electron charge, \hbar is the

reduced Planck constant, and k_B is the Boltzmann constant. Other parameters are used for the calculation such as the Fermi energy $\mu = 0.3$ eV, relaxation time ($\tau = 10^{-13}$ s), the temperature $T = 300$ K, and the thickness of graphene, $h = 0.3$ nm. It is noted that the Fermi energy, $\mu = 0.3$ eV, was used in the current work because calculations have shown that with this selected value in a range of 0.2 to 0.5 eV graphene-covered grating structures exhibit the highest absorbance. Accordingly, the property of graphene can be changed by varying μ which results in a change of plasmonic resonances [33]. Meanwhile, the optical property of Ag based on the Lorentz-Drude model and graphene is plotted in Fig. 2. It is seen that, the real part of permittivity of Ag decreases when the incident wavelength increases while that of graphene is constant. On the contrary, the imaginary part of permittivity of Ag rises when the incident wavelength goes up, and the imaginary part of graphene has a similar trend.

III. NUMERICAL RESULTS AND DISCUSSION

A. Absorbance Spectrum at Normal Incidence

Figure 3 shows the absorbance contours for TM waves at normal incidence of two types of gratings: (a) and (b) the short period grating with and without a graphene overlay, and (c) and (d) the long period grating with and without a graphene layer as a function of wavelength and filling ratio w ($0 < w < 1$), respectively. The short period, $\Lambda = 140$ nm, is to be divided in 7 sections while the long period, $\Lambda = 540$ nm, is divided into 27 sections. For instance, each lamella width (one section) corresponds to 20 nm ($w\Lambda = 20$ nm, and so $w = 1/7 = 0.14$ for the short period grating and $w = 1/27 = 0.04$ for the long period grating), and the grating thickness d is 200 nm while that of graphene h is 0.3 nm. The above values of the lamella width and the grating thickness are selectively feasible for fabrication since their aspect ratio 1:10 is satisfied with current manufacturing techniques. For example, to manufacture gratings one could use a cryogenic etching method to etch deep grating trenches to have the desired geometric gratings and then transfer the graphene onto the gratings. Previous fabrication processes were implemented with a deep width to wall thickness ratio (aspect ratio) up to 40 and a possible trench width of 20 nm [45-47]. Note that graphene is fabricated using chemical vapor deposition on a copper foil. In order to validate our RCWA MATLAB codes, we repeated calculations of radiative properties for the graphene-covered deep grating in Ref. [24], and results (not shown here) have revealed that our obtained absorbance and that of this structure are well-agreed.

As can be seen from Fig. 3 (a) and (c), the absorbance α is obtained to be high at the larger filling ratio at $w = 6/7 = 0.86$ for the short period grating ($\alpha = 0.3$ at the peak $\lambda = 1.67$ μm) and $w = 25/27 = 0.93$ for the long period grating ($\alpha = 0.6$ at the peak $\lambda = 1.47$ μm), and there is no absorbance at small filling ratios. It can be revealed that when the trench (containing air) is opened wider (the lamella width is thus smaller), the absorbance decreases significantly. On the other hand, the trench gets smaller the higher absorbance is obtained due to the coupling of surface plasmons and localized magnetic fields

trapped in grating trenches. Results (not presented here for simplicity) have shown that the SPP occurs at the interface of Ag and air surroundings, and standing waves oscillate in the grating trenches of the short period grating structure [as shown in Fig. 3(a)] with $w = 6/7$ (narrow slits). In contrast, there were no resonance modes to be observed in the short period one with large slits (e.g., $w = 0.14$). The results were in agreement shown in previous work [23, 24, 34, 48]. The structural grating was also optimized with different thicknesses to get an optimal small trench (with $d = 200$ nm) and to ensure for the ease of fabrication as well. Similarly, the absorbance of the graphene-covered Ag short period and long period gratings in Figs. 3(b) and (d) are much enhanced compared with that shown in Figs. 3(a) and (c). In general, Fig. 3 provides a good guideline for designing gratings-based graphene with high optical absorbance.

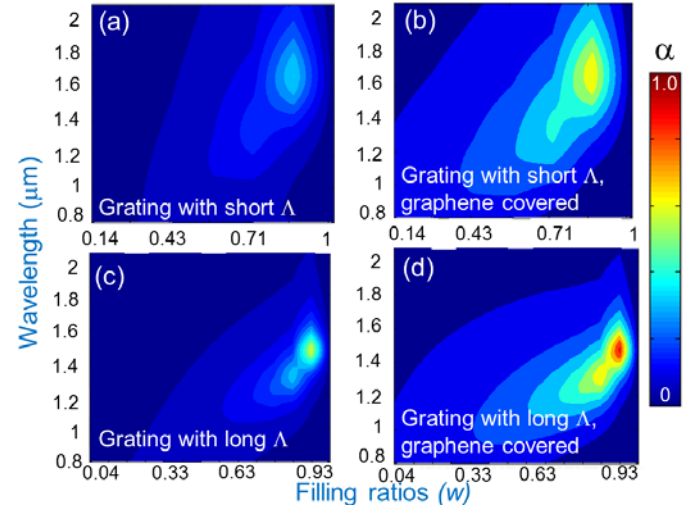


Fig. 3. Absorbance (α) contours at normal incidence for (a) short period Ag grating with $\Lambda = 140$ nm, (b) graphene-covered Ag grating with short $\Lambda = 140$ nm, (c) long period Ag grating with $\Lambda = 540$ nm, and (d) graphene-covered Ag grating with long $\Lambda = 540$ nm in terms of filling ratio ($0 < w < 1$) and wavelength λ .

Figure 4 (a) shows the normal-incidence absorbance of the short and long period gratings with and without a covered graphene sheet with the periods of 140 nm and 540 nm, respectively. It is noted that the short period grating and long period grating with filling ratios of 0.86 ($w = 6/7$) and 0.93 ($w = 25/27$), respectively, the grating thickness d of 200 nm, and the graphene thickness of 0.3 nm were selected. This is because their absorbance displays high values of 0.3 at $\lambda_{\text{peak}} = 1.67$ μm and 0.6 at $\lambda_{\text{peak}} = 1.47$ μm , respectively. However, when covering a graphene layer on top of the grating structures, their absorbance increases up to 0.7 for the short period grating and 0.9 for the long period grating without changing the peak wavelengths. Figures 4(b) and (c) illustrate the absorbance contours of the short and long period graphene-covered Ag gratings in terms of the wavelength and angles of incidence. It is seen that the absorbance of the short period graphene-covered Ag grating remains high absorbance up to 40° and then drops slowly to 70° , but the absorbance spectrum with a bandwidth of 0.2 μm still covers a wide range of the incidence wavelength. Meanwhile, the absorbance with its bandwidth of 0.3 μm of the long period graphene-covered Ag

grating is insensitive to angles of incidence up to 50° and decreases slowly to 80° . In general, the absorptance of the graphene-covered gratings was much enhanced, and their spectra covered a wide range of the incident angles. However, both their absorptance and spectral bandwidths were not obtained to be higher and wider enough.

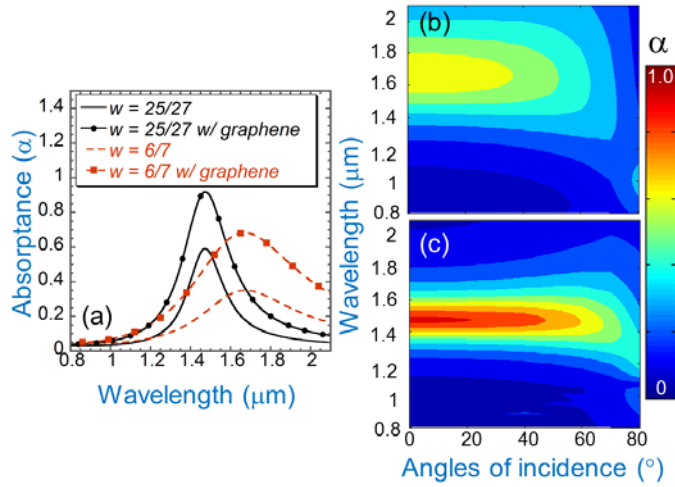


Fig. 4 (a) Normal-incidence absorptance of short period grating ($w = 6/7$, $\Lambda = 140$ nm) with and w/o graphene and long grating period ($w = 25/27$, $\Lambda = 540$ nm) with and w/o graphene, (b) and (c) Absorptance contours of graphene-covered short period and long period gratings, respectively, as function of wavelength and angle of incidence

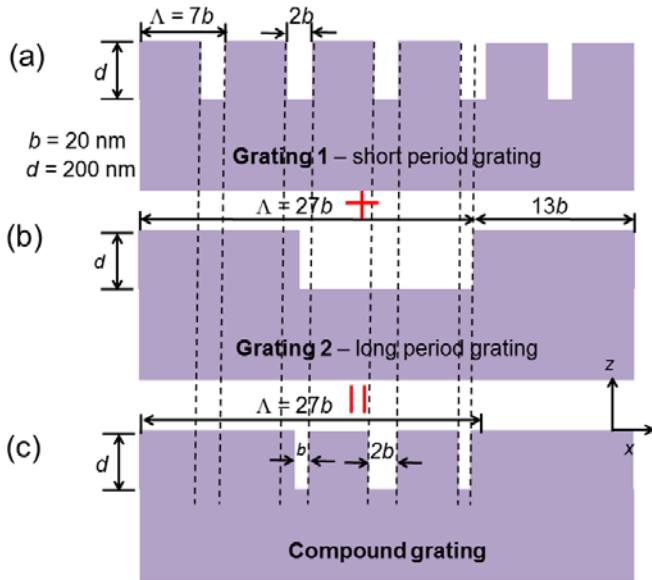


Fig. 5. Schematic illustration of (a) optimal short period grating structure and (b) optimal long period grating structure, and (c) compound Ag grating constructed based on two simple gratings. Their geometries and coordinates are similarly defined as in Fig. 1 such as grating period Λ , grating thickness d , and trench width b . Transverse magnetic wave \mathbf{H} (parallel to the grating grooves or y-axis) is incident on grating with wavevector \mathbf{k} and angle θ

Figure 5 shows the schematic illustration of (a) the short period, (b) long period, and (c) compound grating structures. The compound grating in Fig. 5(c) is constructed based on the SGs (a) and (b), and their geometries and coordinates are same as shown in Fig. 1. As demonstrated in Figs. 3 and 4, the maximum absorptance could be obtained in the short period

and long period gratings with a condition of the small trench (the filling ratio is large), e.g. $w = 6/7$ and $25/27$. Accordingly, a compound grating structure was proposed by combining this feature of two grating structures with different grating periods as shown in Fig. 5(c). Note that the short and long periods were based on the above calculation due to their high optical performance. It is also ensured that the characteristic of the trench width in the compound grating is kept to be small (the trench width was selected to be $b = 20$ nm). Therefore, the compound grating used to be analyzed features a long period of 540 nm comprising three Ag lamellae and three trenches occupied by air with different sizes.

TABLE I. COMPARISON OF OPTICAL PERFORMANCE OF PREVIOUS STRUCTURES COVERED BY GRAPHENE WITH THE CURRENT WORK

Ref.	Absorptance (%)	Spectral bandwidths (μm)	Structures
[23, 24]	81	~ 0.30	A binary grating
[26]	80	~ 0.02	Multiple layered structure
[27]	65	~ 0.12	2D nanopillars
[28]	90	~ 0.32	A metal layer with an array of groove rings covered by 8 graphene sheets
[29]	~ 50	~ 0.35	A multiple layered metal dielectric metal structure
[30]	90	~ 0.5	A metal/dielectric/metal structure
[31]	99	~ 0.02	A 2D multiple layered structure with a cross-shaped groove air resonator
This work	98	~ 0.6	A compound Ag grating

Figure 6(a) displays the normal-incidence absorptance for TM waves of the short period ($w = 5/7$), long period ($w = 13/27$), and compound gratings with and without a covered graphene layer. The compound grating was built based on the short and long period gratings. It is noted that building the compound grating having small trenches but comprising multiple lamellae and trenches requires a SG structure with a wide trench width to be superimposed by another with smaller trenches as shown in Fig. 5. Accordingly, the optimal filling ratios were selected based on Fig. 3 for calculations such as $w = 5/7$ and $13/27$. From Fig. 6(a), it is seen that the absorptance of the long period grating with a wide trench ($b = 280$ nm) is found to be 0.05 and increases to 0.22 when covered by a graphene sheet. Meanwhile, the short period grating with a trench $b = 40$ nm absorbs energy about 0.2, and this absorptance goes up to 0.4 when it is added with a graphene layer. On the contrary, the compound grating exhibits very high absorptance of 0.9 at the peak $\lambda = 1.67 \mu\text{m}$ and spectral bandwidth about $0.3 \mu\text{m}$. Interestingly, it absorbs the maximum

energy of 0.98 at the same peak wavelength when covered by a graphene sheet. In addition, its spectral bandwidth is obtained to be approximately 0.6 μm .

In order to prove superior performance of the proposed device, Table 1 shows a comparison of the optical characteristics including absorptance, bandwidths and structural geometries of previously designed structures covered by graphene and the current work. It is seen that the proposed device features a simply geometric structure exhibiting a higher absorptance (98%) and a wider bandwidth (0.6 μm) compared with those of the previous structures. Although some of previous devices have high absorptance from 90% to 99%, they own complex geometric structures (multiple layers or 2D geometries), which need more materials and complicated fabrication processes.

Figures 6(b) and (c) show the normal-incidence absorptance contours of the compound grating with and without a covered graphene layer as a function of wavelengths and angles of incidence. It is revealed that the absorptance in both structures is independent to the incident angles in a wide range from 0° to 80° . It can be observed that the grating without the graphene overlay keeps maximum absorptance at a very large range of incident angles although it exhibits a narrower bandwidth. In other words, the absorptance spectrum of the graphene-covered compound Ag grating has the wider bandwidth covering a range of wavelengths from 1.4 μm to 1.8 μm up to 40° and is then narrower after 50° . Generally, the proposed absorber provides very good optical performance, i.e. the superior absorptance, the wider spectral bandwidth, and insensitivity of the incident angles. In addition to that, it owns an easy fabrication process due to the simple structural geometry that results in cost effectiveness.

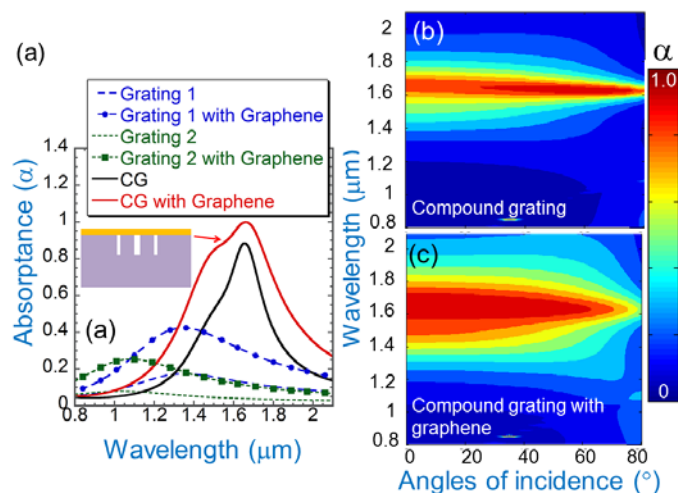


Fig. 6. (a) Normal-incidence absorptance of short period grating ($w = 5/7$), long grating period ($w = 13/27$), and compound grating constructed by superimposing short and long period grating with and w/o a covered graphene, (b) and (c) Absorptance contours of compound Ag grating and graphene-covered compound Ag grating, respectively, as function of wavelength and angles of incidence

B. Physic Origin Underlying the Grating Structures

Figure 7 shows the electric field and Poynting vector distributions in one grating period of the CG and

graphene-covered CG structures at an off-resonance wavelength of 1 μm , on-resonance wavelength of 1.67 μm , and normal incidence. Figs. 7(a) and (b) display the electric field distributions at the off-resonance wavelength corresponding to the lowest absorptance of the CG with and without a graphene layer as plotted in Fig. 6(a). As shown, the electric fields are strongly confined in the middle trench of one grating period of the CG and the graphene-covered CG structure; however, they are much enhanced at the corners of the graphene and trench opening. In other words, at the on-resonance wavelength as shown in Figs. 7(c) and (d), the electric fields trap in the two grating trenches, which results in a higher absorptance compared with those at the off-resonance wavelength. Similarly, magnetic fields (not shown here) oscillating much more in the centers of two grating trenches at the on-resonance wavelength were also observed.

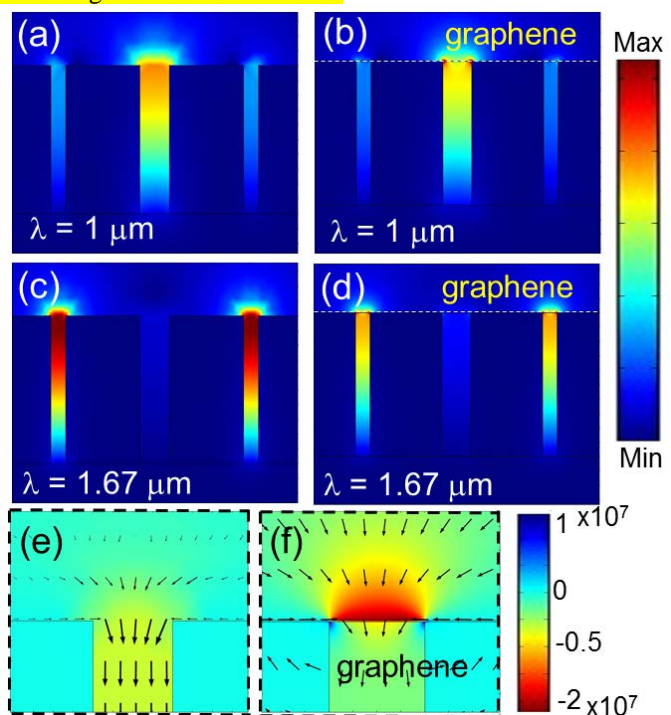


Fig. 7. Electric field distributions and Poynting vector in one grating period including three trenches of CG and graphene-covered CG structures at off-resonance wavelength ($\lambda = 1 \mu\text{m}$ and $\theta = 0^\circ$) and on-resonance wavelength ($\lambda = 1.67 \mu\text{m}$ and $\theta = 0^\circ$). (a) and (b) normalized electric field at 1 μm , (c) and (d) normalized electric field at 1.67 μm , and (e) and (f) Poynting vector patterns and arrows at 1.67 μm . It is noted that Figs. (e) and (f) show only one trench opening w/o graphene of the CG structure.

It is clearly seen from Figs. 7(a)-7(d) that high concentration of the electric fields is at the graphene and trench opening; as a result, the absorptance of graphene is elevated. This enhancement can be explained based on the power dissipation density of graphene, which is related to optical constants of graphene (high imaginary part in the permittivity) and the high electric field [24]. It is described as:

$$w(x, z) = \frac{1}{2} \varepsilon_0 \omega \varepsilon''(x, z) |\mathbf{E}(x, z)|^2 \quad (4)$$

where \mathbf{E} is the complex electric field, and ε'' is the imaginary part of the permittivity of graphene. Finally, the absorptance of graphene is calculated by dividing the power dissipated in graphene to the incident power.

Figures 7(e) and (f) show energy flowing indicated by patterns and arrows in trench opening of CG with and without graphene at normal incidence and the on-resonance wavelength, $\lambda = 1.67\mu\text{m}$. As can be seen, the energy squeezes into the trench of all the grating structures. However, the coming energy concentrates much on the interface between the graphene layer and the top edge of the trench opening. In addition, the energy flows on the surfaces of the metal layer and the graphene layer as indicated by the arrows. This confirmed that the designer surface plasmons occur at the interface of Ag (graphene) and the dielectric layer [40]. Further, energy reflects back from the grating walls and trench bottom hitting the graphene overlay; accordingly, this results in a reflection reduction. Therefore, as demonstrated the graphene layer absorbs much energy due to the localized electromagnetic fields inside the grating trench (the Fabry-Perot mode) coupling with surface plasmons [41, 49, 50]. These phenomena cause the increase of the absorptance of the whole structure and widen the spectral bandwidth as well.

IV. CONCLUSIONS

This work theoretically presented a method of enhancing graphene absorption by proposing a compound metallic grating structure. The enhancement of absorptance up to the maximum attainable of 100% was demonstrated with the observation of strongly localized electromagnetic fields in the grating trenches and SPP modes at the interface of Ag/graphene and air. Moreover, the resonance frequency occurred in the compound Ag grating with and without a graphene overlay remains unchanged. It has also shown that the spectral bandwidth of 0.6 μm is found to be wider than that of the previous studies, and the absorption spectrum is insensitive to a large range of the angles of incidence. Additionally, the proposed structure is feasible to be manufactured, which might pave the way for many novel designs of graphene-based photon detection, energy harvesting systems, and plasmonics devices.

REFERENCES

- [1] P. Avouris and M. Freitag, "Graphene photonics, plasmonics, and optoelectronics," *IEEE J. Sel. Top. Quant.*, vol. 20, pp. 72-83, 2013.
- [2] F. Xia, T. Mueller, Y.-m. Lin, A. Valdes-Garcia, and P. Avouris, "Ultrafast graphene photodetector," *Nat. Nanotechnol.*, vol. 4, p. 839, 2009.
- [3] F. J. Garcia de Abajo, "Graphene plasmonics: challenges and opportunities," *ACS Photonics*, vol. 1, pp. 135-152, 2014.
- [4] M. Jablan, M. Soljačić, and H. Buljan, "Plasmons in graphene: fundamental properties and potential applications," *Proceedings of the IEEE*, vol. 101, pp. 1689-1704, 2013.
- [5] A. Grigorenko, M. Polini, and K. Novoselov, "Graphene plasmonics," *Nat. Photonics*, vol. 6, p. 749, 2012.
- [6] A. Vakil and N. Engheta, "Transformation optics using graphene," *Science*, vol. 332, pp. 1291-1294, 2011.
- [7] M. Furchi, A. Urich, A. Pospischil, G. Lilley, K. Unterrainer, H. Detz, P. Klang, A. M. Andrews, W. Schrenk, and G. Strasser, "Microcavity-integrated graphene photodetector," *Nano Lett.*, vol. 12, pp. 2773-2777, 2012.
- [8] J. Wu, M. Agrawal, H. A. Becerril, Z. Bao, Z. Liu, Y. Chen, and P. Peumans, "Organic light-emitting diodes on solution-processed graphene transparent electrodes," *ACS Nano*, vol. 4, pp. 43-48, 2009.
- [9] C.-H. Liu, Y.-C. Chang, T. B. Norris, and Z. Zhong, "Graphene photodetectors with ultra-broadband and high responsivity at room temperature," *Nat. Nanotechnol.*, vol. 9, p. 273, 2014.
- [10] T. Echtermeyer, L. Britnell, P. Jarnos, A. Lombardo, R. Gorbachev, A. Grigorenko, A. Geim, A. C. Ferrari, and K. Novoselov, "Strong plasmonic enhancement of photovoltage in graphene," *Nat. Commun.*, vol. 2, p. 458, 2011.
- [11] Y. Zhang, T. Liu, B. Meng, X. Li, G. Liang, X. Hu, and Q. J. Wang, "Broadband high photoresponse from pure monolayer graphene photodetector," *Nat. Commun.*, vol. 4, p. 1811, 2013.
- [12] F. Wang, Y. Zhang, C. Tian, C. Girit, A. Zettl, M. Crommie, and Y. R. Shen, "Gate-variable optical transitions in graphene," *Science*, vol. 320, pp. 206-209, 2008.
- [13] R. Alaei, M. Farhat, C. Rockstuhl, and F. Lederer, "A perfect absorber made of a graphene micro-ribbon metamaterial," *Opt. Express*, vol. 20, pp. 28017-28024, 2012.
- [14] L. Falkovsky, "Optical properties of graphene," in *J. Phys.: Conf. Ser.*, 2008, p. 012004.
- [15] A. Y. Nikitin, F. Guinea, F. J. Garcia-Vidal, and L. Martin-Moreno, "Surface plasmon enhanced absorption and suppressed transmission in periodic arrays of graphene ribbons," *Phys. Rev B*, vol. 85, p. 081405, 2012.
- [16] S. Thongrattanasiri, F. H. Koppens, and F. J. G. De Abajo, "Complete optical absorption in periodically patterned graphene," *Phys. Rev. Lett.*, vol. 108, p. 047401, 2012.
- [17] N. Nguyen-Huu, M. Cada, Y. Ma, F. Che, J. Pistora, K. Yasumoto, J. Lin, and H. Maeda, "Mid-infrared Fano resonance in heavily doped silicon and metallic nanostructures due to coupling of Wood-Rayleigh anomaly and surface plasmons," *J. Phys. D: Appl. Phys.*, vol. 50, p. 205105, 2017.
- [18] R. R. Nair, P. Blake, A. N. Grigorenko, K. S. Novoselov, T. J. Booth, T. Stauber, N. M. Peres, and A. K. Geim, "Fine structure constant defines visual transparency of graphene," *Science*, vol. 320, pp. 1308-1308, 2008.
- [19] Z. Fang, Z. Liu, Y. Wang, P. M. Ajayan, P. Nordlander, and N. J. Halas, "Graphene-antenna sandwich photodetector," *Nano Lett.*, vol. 12, pp. 3808-3813, 2012.
- [20] Y. Yao, M. A. Kats, R. Shankar, Y. Song, J. Kong, M. Loncar, and F. Capasso, "Wide wavelength tuning of optical antennas on graphene with nanosecond response time," *Nano Lett.*, vol. 14, pp. 214-219, 2013.
- [21] A. Ferreira, N. Peres, R. Ribeiro, and T. Stauber, "Graphene-based photodetector with two cavities," *Phys. Rev B*, vol. 85, p. 115438, 2012.
- [22] J. R. Piper and S. Fan, "Total absorption in a graphene monolayer in the optical regime by critical coupling with a photonic crystal guided resonance," *ACS Photonics*, vol. 1, pp. 347-353, 2014.
- [23] B. Zhao, J. Zhao, and Z. Zhang, "Enhancement of near-infrared absorption in graphene with metal gratings," *Appl. Phys. Lett.*, vol. 105, p. 031905, 2014.
- [24] B. Zhao, J. Zhao, and Z. Zhang, "Resonance enhanced absorption in a graphene monolayer using deep metal gratings," *J. Opt. Soc. Am. B*, vol. 32, pp. 1176-1185, 2015.
- [25] N. Nguyen-Huu and Y.-L. Lo, "Control of infrared spectral absorptance with one-dimensional subwavelength gratings," *J. Lightwave Technol.*, vol. 31, pp. 2482-2490, 2013.
- [26] H. Lu, X. Gan, B. Jia, D. Mao, and J. Zhao, "Tunable high-efficiency light absorption of monolayer graphene via Tamm plasmon polaritons," *Opt. Lett.*, vol. 41, pp. 4743-4746, 2016.
- [27] Y. Liu, W. Huang, T. Gong, Y. Su, H. Zhang, Y. He, Z. Liu, and B. Yu, "Ultra-sensitive near-infrared graphene photodetectors with nanopillar antennas," *Nanoscale*, vol. 9, pp. 17459-17464, 2017.
- [28] H. Lu, B. P. Cumming, and M. Gu, "Highly efficient plasmonic enhancement of graphene absorption at telecommunication wavelengths," *Opt. Lett.*, vol. 40, pp. 3647-3650, 2015.
- [29] L. Zhang, L. Tang, W. Wei, X. Cheng, W. Wang, and H. Zhang, "Enhanced near-infrared absorption in graphene with multilayer metal-dielectric-metal nanostructure," *Opt. Express*, vol. 24, pp. 20002-20009, 2016.
- [30] Q. Pan, J. Hong, G. Zhang, Y. Shuai, and H. Tan, "Graphene plasmonics for surface enhancement near-infrared absorptivity," *Opt. Express*, vol. 25, pp. 16400-16408, 2017.
- [31] X. Jiang, T. Wang, S. Xiao, X. Yan, and L. Cheng, "Tunable ultra-high-efficiency light absorption of monolayer graphene using critical coupling with guided resonance," *Opt. Express*, vol. 25, pp. 27028-27036, 2017.
- [32] B. Zhao and Z. M. Zhang, "Study of magnetic polaritons in deep gratings for thermal emission control," *J. Quant. Spectrosc. Radiat. Transfer*, vol. 135, pp. 81-89, 2014.

- [33] B. Zhao and Z. M. Zhang, "Strong plasmonic coupling between graphene ribbon array and metal gratings," *ACS Photonics*, vol. 2, pp. 1611-1618, 2015.
- [34] N. Nguyen-Huu and Y.-L. Lo, "Tailoring the optical transmission spectra of double-layered compound metallic gratings," *IEEE Photon. J.*, vol. 5, pp. 2700108-2700108, 2013.
- [35] W.-C. Tan, J. R. Sambles, and T. Preist, "Double-period zero-order metal gratings as effective selective absorbers," *Phys. Rev. B*, vol. 61, p. 13177, 2000.
- [36] A. P. Hibbins, J. R. Sambles, and C. R. Lawrence, "Excitation of remarkably nondispersive surface plasmons on a nondiffracting, dual-pitch metal grating," *Appl. Phys. Lett.*, vol. 80, pp. 2410-2412, 2002.
- [37] D. C. Skigin and R. A. Depine, "Diffraction by dual-period gratings," *Appl. Opt.*, vol. 46, pp. 1385-1391, 2007.
- [38] N. Nguyen-Huu, J. Pištora, and M. Cada, "Dual broadband infrared absorptance enhanced by magnetic polaritons using graphene-covered compound metal gratings," *Opt. Express*, vol. 27, pp. 30182-30190, 2019.
- [39] N. Nguyen-Huu, M. Cada, J. Pištora, and K. Yasumoto, "Tunable optical filter based on gold and silver double-sided gratings and its application as plasmonic sensor," *J. Lightwave Technol.*, vol. 32, pp. 3477-3484, 2014.
- [40] A. P. Hibbins, B. R. Evans, and J. R. Sambles, "Experimental verification of designer surface plasmons," *Science*, vol. 308, pp. 670-672, 2005.
- [41] X.-R. Huang, R.-W. Peng, and R.-H. Fan, "Making metals transparent for white light by spoof surface plasmons," *Phys. Rev. Lett.*, vol. 105, p. 243901, 2010.
- [42] Y. Dai, H. Xu, H. Wang, Y. Lu, and P. Wang, "Experimental demonstration of high sensitivity for silver rectangular grating-coupled surface plasmon resonance (SPR) sensing," *Opt. Commun.*, vol. 416, pp. 66-70, 2018.
- [43] N. Nguyen-Huu, Y.-L. Lo, Y.-B. Chen, and T.-Y. Yang, "Realization of integrated polarizer and color filters based on subwavelength metallic gratings using a hybrid numerical scheme," *Appl. Opt.*, vol. 50, pp. 415-426, 2011.
- [44] A. D. Rakić, A. B. Djurišić, J. M. Elazar, and M. L. Majewski, "Optical properties of metallic films for vertical-cavity optoelectronic devices," *Appl. Opt.*, vol. 37, pp. 5271-5283, 1998.
- [45] H. Miao, A. A. Gomella, N. Chedid, L. Chen, and H. Wen, "Fabrication of 200 nm period hard X-ray phase gratings," *Nano Lett.*, vol. 14, pp. 3453-3458, 2014.
- [46] Y. Wu, D. Olynick, A. Goodyear, C. Peroz, S. Dhuey, X. Liang, and S. Cabrini, "Cryogenic etching of nano-scale silicon trenches with resist masks," *Microelectron. Eng.*, vol. 88, pp. 2785-2789, 2011.
- [47] C. Welch, A. Goodyear, T. Wahlbrink, M. C. Lemme, and T. Mollenhauer, "Silicon etch process options for micro-and nanotechnology using inductively coupled plasmas," *Microelectron. Eng.*, vol. 83, pp. 1170-1173, 2006.
- [48] N. Nguyen-Huu, Y.-B. Chen, and Y.-L. Lo, "Development of a polarization-insensitive thermophotovoltaic emitter with a binary grating," *Opt. Express*, vol. 20, pp. 5882-5890, 2012.
- [49] G. D'Aguzzo, N. Mattiucci, M. Bloemer, D. De Ceglia, M. Vincenti, and A. Alù, "Transmission resonances in plasmonic metallic gratings," *JOSA B*, vol. 28, pp. 253-264, 2011.
- [50] K. Li, J. M. Fitzgerald, X. Xiao, J. D. Caldwell, C. Zhang, S. A. Maier, X. Li, and V. Giannini, "Graphene plasmon cavities made with silicon carbide," *ACS Omega*, vol. 2, pp. 3640-3646, 2017.

Nghia Nguyen-Huu (SM'14) received his Bachelor's degree in mechanical engineering from the Can Tho University, Vietnam, in 2004, the dual master's degree in mechanical engineering from the Institut National des Sciences Appliquées de Lyon, France, and Universitat Politècnica de Catalunya Barcelona, Spain, in 2007, and the Ph.D. degree from the Department of Materials Science and Engineering, National Cheng Kung University (NCKU), Taiwan, in 2012. He has authored 17 SCI journals and some SPIE and IEEE conference proceedings and is a senior member of SPIE.

Nghia has research interests focusing on the field of micro/nanoscale thermal radiation, metamaterials, plasmonics and fluid transport for applications of filters, polarizers, energy harvesting devices, biosensors, and so on.

Jaromír Pištora received his MSc. degree in theory of electromagnetic field from Czech Technical University in Prague (1977) and Ph.D. degree in experimental physics from Charles University in Prague (1984).

He is currently Professor of applied physics at VŠB - Technical University of Ostrava, and Director of Nanotechnology Center. He has published more than 300 papers in international journals and conference proceedings including 12 invited talks. Dr. Pištora is a member of IEEE, OSA, SPIE-Czech Chapter, Czech and Slovak Society for Photonics, Union of Czech Math. and Physicists, EOS-Czech Chapter. He was a Visiting Professor at Kyushu University (1999, 2001), Research Institute of Electronics, Shizuoka University (2002, 2005-2006), and Dalhousie University (2007). He has also been a Chairman of International Symposium on Microwave and Optical Technology (ISMOT), Ostrava 2003, and vice chairman of ISMOT 2005, Fukuoka, Japan. His research interests include magneto-optics, periodical structures, and magnetic sensors.

Michael Cada graduated from the Czech Technical University in Prague in electrical engineering in 1976 and received the Ph.D. degree in technical sciences in 1979 from the Czechoslovak Academy of Sciences in Prague.

Since his graduation, he has worked as a Research Associate with A.M. Prokhorov in Moscow, as an Assistant Professor at the Czech Technical University, as a Research Fellow at the Polytechnic University of New York, as a visiting Researcher at NRC, as a Research Engineer at MPB in Montreal, as an invited Professor at Ecole Polytechnique Federale in Lausanne, Switzerland, as an Industrial Fellow at BNR and as a guest Scientist at Siemens in Germany. Dr. Cada has attracted more than C\$10 million in research funds; published more than 250 refereed articles, conference papers and industrial reports; supervised more than 200 highly qualified personnel – and set up a high-tech company. He is a principal investigator in a European Union nanotechnology training project that has recently attracted more than C\$2 million in funding. Dr. Cada is also a director of NSERC (Natural Sciences and Engineering Research Council of Canada), CREATE (Collaborative Research and Training Experience Program), and ASPIRE (Applied Science in Photonics and Innovative Research in Engineering).

Trung Nguyen-Thoi received his PhD in Mechanical Engineering from National University of Singapore (NUS) in 2010. He was promoted to Associate Professor in Mechanics by University of Science (VNU-HCM) in 2013 and was promoted to Research Full Professor of Ton Duc Thang University in 2017. He has been the Director of Institute for Computational Science (INCOS) of TDTU since February 2014.

His research interests include Numerical methods, Computational mechanics, Structural optimization, Reliability analysis, intelligent computation and Structural health monitoring. He has published over 170 Journal papers ISI, finished 5 national basic research projects and co-edited 2 books (one of them is published by CRC Publisher). His H-index is now 42 (on ISI) with more than 6000 citations. He is the recipient of the silver medal upon graduation of Bach Khoa University (VNU-HCM), Master scholarship of University of Liege (Belgium), PhD scholarship of NUS, President graduate fellowship of NUS, Best PhD Thesis award of NUS, Lifetime Achievement Award of TDTU and many excellence research awards of Vietnam National University – HCM and TDTU. He is a member of Editorial Board of Journal "Shock and Vibration" (ISI journal), International Editor Board of "Journal of Computational Applied Mechanics" (JCAMECH) (Emerging Sources Citation Index) and the Deputy Editor in Chief of the "Journal of Advanced Engineering and Computation" (JAEC).

Youqiao Ma received the M. Sc. degree from the Faculty of Science, Ningbo University, Zhejiang, China, in 2010. In 2015, he received his PhD degree from Dublin Institute of Technology, Ireland. Currently

he is working as a research fellow at Applied Science in Photonics and Innovative Research in Engineering (ASPIRE) in Dalhousie University, Canada. He has been involved in four national and international projects including Fiosraigh Science Foundation Ireland (TIDA), the Open Fund of the State Key Laboratory of Information Photonics and Optical Communications, and the Natural Sciences and Engineering Research Council of Canada (NSERC). He is authored more than 30 scientific papers and 10 conference proceeding papers. His research interests include fiber optics, plasmonic waveguides, terahertz devices, semiconductors, biosensing and energy-harvesting solutions.

Kiyotoshi Yasumoto (LF') received the B.E., M.E., and D.E. degrees in Communication Engineering from Kyushu University, Fukuoka, Japan, in 1967, 1969, and 1977, respectively. From 1988 to 2008, he has been a Chair Professor of the Division of Electromagnetic Waves and Communications at the Department of Computer Science and Communication Engineering, Kyushu University. Since April 2008, he has been Professor Emeritus, Kyushu University. He was a Visiting Professor of the Department of Electrical and Computer Engineering, University of Wisconsin, Madison, USA, in 1989, a Guest Professor of the Department of Applied Electronics, University of Roma Tre, Italy in 2009, a Guest Professor of Nanotechnology Center, Technical University of Ostrava, Czech Republic in 2013, and a Visiting Professor of the College of Information Science and Technology, Nanjing Forestry University, China from 2012 to 2015.

Dr. Yasumoto is a Fellow of Optical Society of America (OSA), a Fellow of Institute of Electronics, Information and Communication Engineers (IEICE), a Fellow of Chinese Institute of Electronics (CIE), and a Fellow of Electromagnetics Academy, USA. His research interests are in electromagnetic wave theory, analytical and numerical techniques in microwave and photonics, and wave interactions, radiation, and scattering in electron beam-plasma systems.

B. M. Azizur Rahman (LF') received the B.Sc.Eng and M.Sc.Eng. degrees in Electrical Engineering with distinctions from Bangladesh University of Engineering and Technology (BUET), Dhaka, Bangladesh, in 1976 and 1979, respectively. He also received two gold medals for being the best undergraduate and graduate students of the university in 1976 and 1979, respectively. In 1979, he was awarded with a Commonwealth Scholarship to study for a PhD degree in the UK and subsequently in 1982 received his PhD degree in Electronics from University College London.

In 1988, he joined City, University of London, as a lecturer, and became a full professor in 2000. At City, he leads the research group on Photonics Modelling, specialised in the use of rigorous and full-vectorial numerical approaches to design, analyse and optimise a wide range of photonic devices. He has published more than 600 journal and conference papers, and his journal papers have been cited more than 8200 times, with an h-index value of 40. He has supervised 34 students to complete their PhD degrees as their first supervisor and received more than £13 M in research grants. Prof. Rahman is a Life Fellow of the IEEE, and Fellow of the Optical Society of America and the SPIE.

Qiang Wu received the B.S. and Ph.D. 79 degrees from Beijing Normal University and 80 Beijing University of Posts and 81 Telecommunications, Beijing, China, in 1996 82 and 2004, respectively. From 2004 to 2006, 83 he worked as a Senior Research Associate in 84 City University of Hong Kong. From 2006 to 85 2008, he took up a research associate post in Heriot-Watt 86 University, Edinburgh, U.K. From 2008 to 2014, he worked as 87 a Stokes Lecturer at Photonics Research Centre, Dublin 88 Institute of Technology, Ireland. He is currently an Associate 89 Professor at

Northumbria University, U.K. His research 90 interests include photonics devices and fiber optic sensing

Yuan Ma is an Associate Professor in the Electrical and Computer Engineering Department at Dalhousie University. She received her Bachelor and M.Eng. degrees in Applied Physics from Southeast University, P.R. China in 1991 and 1994; and her M.Sc. and Ph.D. degrees in Microelectronics from University of Alberta in 1997 and 2002. From November 2000 to June 2006, she worked as a research scientist at JDS Uniphase (Ottawa).

Quang Hieu Ngo (SM'19) received his B.S. degree in Mechanical Engineering from Ho Chi Minh City University of Technology, Vietnam, in 2002, an M.S. degree in Mechatronics from Asian Institute of Technology, Thailand, in 2007 and a Ph.D. degree in Mechanical Engineering from Pusan National University, Korea, in 2012. He is currently an associate professor in the Department of Mechanical Engineering, Can Tho University and serves as Head of Department since 2014. His research interests include port automation, control of axially moving systems, sliding mode control, adaptive control, and input shaping control.

Lin Jie received the Ph.D. degree in optics from Harbin Institute of Technology, Harbin, China, in 2007. He currently works as an Associate Professor in the Department of Automation Measurement and Control, Harbin Institute of Technology. His research interests include optical beam shaping, super-resolution focusing, grating for lithography, and binary optical elements.

Hiroshi Maeda was born in Fukuoka, Japan, in July 1966. He received the B.E. degree in electronics engineering, M.E. degree in information systems engineering and D.E. degree in computer science and communication engineering from Kyushu University in 1989, 1991, and 1996, respectively. In 1997, he joined to Department of Information and Communication Engineering in Fukuoka Institute of Technology, Japan. His research interest is experimental approach for electromagnetic band gap structure. He also studies numerical analysis technique for wave-guiding structure and nonlinear optics. Prof. Maeda is a member of Optical Society of America (OSA), Institute of Electronics, Information and Communication Engineers (IEICE) Japan and Japan Society of Applied Physics (JSAP).